INFRASTRUCTURE OF SERBIAN RAILWAYS JSC

NETWORK STATEMENT 2024

 $Adopted\ by\ the\ Shareholders'\ Meeting\ of\ "Infrastructure\ of\ Serbian\ Railways"\ JSC$

No: 5/2022-435-179 dated October 21st, 2022

Effective as of Decembre 10th, 2023

Applicable to 2023/2024 Timetable

На основу члана 20. став 6. Закона о железници ("Службени гласник РС", број 41/18) и члана 17. став 1. и члана 43. став 2. Закона о Влади ("Службени гласник РС", бр. 55/05, 71/05 – исправка, 101/07, 65/08, 16/11, 68/12 – УС, 72/12, 7/14 – УС, 44/14 и 30/18 – др. закон),

Влада доноси

РЕШЕЊЕ

О ДАВАЊУ САГЛАСНОСТИ НА ОДЛУКУ О ВИСИНИ ЦЕНА ПРИСТУПА И ЦЕНА ПРИСТУПА ДЕЛУ ЈАВНЕ ЖЕЛЕЗНИЧКЕ ИНФРАСТРУКТУРЕ КОЈИ ПОВЕЗУЈЕ СА УСЛУЖНИМ ОБЈЕКТИМА ЗА РЕД ВОЖЊЕ ЗА 2023/2024. ГОДИНУ

I

Даје се сагласност на Одлуку о висини цена приступа и цена приступа делу јавне железничке инфраструктуре који повезује са услужним објектима за Ред вожње за 2023/2024. годину, коју је донела Скупштина Акционарског друштва за управљање јавном железничком инфраструктуром "Инфраструктура железнице Србије", Београд, на седници од 11. августа 2022. године.

II

Ово решење објавити у "Службеном гласнику Републике Србије".

05 Број: 338-7598/2022

У Београду, 30. септембра 2022. године

ВЛАДА

Тачност преписа оверава

HEPALIHII CEKPETAP

Новак Недић

ПРЕДСЕДНИК

Ана Брнабић, с.р.



Amendments, corrections and interpretations

No	Subject	Determined by the Decision No.	Valid as of
1	7.3.4; Appendix 6	Infrastructure of Serbian Railways JSC Shareholders' Meeting Decision No 5/2022- 467-184 dated December 26 th , 2022	December 26 th , 2022
2	2.3.11; 6.3.2; 7.3.4; Appendix 4.3 and 4.4	Infrastructure of Serbian Railways JSC Shareholders' Meeting Decision No 5/2023- 476-187 dated January 30 th , 2023	January 30 th , 2023
3	2.4.3; 2.4.6; 2.4.7; 2.4.8; 7.3.4; 7.3.5; Appendix 3.11	Infrastructure of Serbian Railways JSC Shareholders' Meeting Decision No 5/2023- 480-189 dated March 24 th , 2023	March 24 th , 2023
4	Terms and Abbreviations; 1.1; 1.3.1; 1.3.3; 1.5.1; 2.3.1; 2.4.1; 3.2; 3.3.2; 4.2; 4.5.1; 4.5.4; 5.9; 7.3.3; 7.3.7; 7.3.8; Appendices 3.10, 3.11, 4.3, 4.4, 6 and 8	Infrastructure of Serbian Railways JSC Shareholders' Meeting Decision No 5/2023- 494-196 dated September 6 th 2023	September 6 th , 2023
5	1.1; 7.3.4; Appendices 1, 3.11, 6 and 8	Infrastructure of Serbian Railways JSC Shareholders' Meeting Decision No 5/2023- 524-204 dated December 12 th 2023	December 12 th , 2023
6	Appendices 3.11 and 4.4	Infrastructure of Serbian Railways JSC Shareholders' Meeting Decision No 5/2024- 534-212 dated Aprl 2 nd 2024	April 2 nd , 2024



TABLE OF CONTENTS

TERMS AND ABBREVIATIONS	7
1. GENERAL INFORMATION	11
1.1 Introduction	11
1.2 Purpose of the Network Statement	14
1.3 Legal Aspects	14
1.3.1 Legal Framework	
1.3.2 Legal Status and Liability	
1.3.3 Appeals Procedure	
1.4 Structure of the Network Statement	
1.5 Validity Period, Updating and Publishing	
1.5.1 Validity Period of the Network Statement	
1.5.2 Updating Process	
1.5.3 Publishing, Distribution and Availability of the Network Statement	
1.6 Contacts	
1.7 Cooperation Between European IMs/ABs	
1.7.1 Rail Freight Corridors	
1.7.2 RailNetEurope	
2. INFRASTRUCTURE	
2.1 Introduction	
2.2 Extent of Network	
2.2.1 Limits	
2.2.2 Connecting Railway Networks	
2.3 Network Description	
2.3.1 Geographic data and types of railway lines	
2.3.2 Track Gauges	
2.3.3 Stations and Nodes	
2.3.4 Loading Gauge	
2.3.5 Weight Limits	
2.3.6 Line Gradients	
2.3.7 Maximum Line Speeds	
2.3.8 Maximum Train Lengths	
2.3.9 Power Supply	
2.3.10 Signalling Systems	
2.3.11 Traffic Control Systems.	
2.3.12 Communication Systems	
2.3.13 Train Control Systems	
2.4 Traffic Restrictions	
2.4.1 Specialised Infrastructure	
2.4.2 Environmental Restrictions	
2.4.3 Dangerous Goods	
2.4.4 Tunnel Restrictions.	
2.4.5 Bridge Restrictions	
2.5 Availability of the Infrastructure	
2.6 Infrastructure Development	
3. ACCESS CONDITIONS	
3.1 Introduction	
3.2 General Access Requirements	
3.2.1 Conditions for Applying for Capacity	
3.2.2 Conditions for Access to the Railway Infrastructure	
3.2.3 Licenses	
3.2.4 Safety Certificate	
3.2.5 Coverage for Civil Liability (Insurance)	
\mathcal{C}	
3.3.1 Framework Agreement	
3.3.2 Contracts with RUs	38



3.4 S	pecific Access Requirements	
3.4	4.1 Rolling Stock Acceptance	
3.4	4.2 Staff Acceptance	
3.4	4.3 Exceptional Transport	
	4.4 Transport of Dangerous Goods	
4. CAP	ACITY ALLOCATION	
4.1	Introduction	
4.2.	Description of infrastructure capacity allocation procedure	
4.3	Allocation of capacity for maintenance, including the allocation process	42
4.4.	Impact of Framework Agreements	43
4.5	Schedule for Path Requests and Allocation Process	43
4.5	5.1 Schedule of requests submission for new annual timetabling process	43
4.5	5.3 Allocation of capacities during annual Timetable validity period on ad hoc request	44
4.5	5.4 Path Allocation and Coordination Process	44
4.5	5.5 Dispute Resolution Process	45
4.6	Congested Infrastructure	
4.7.	Exceptional Transports and Dangerous Goods	46
4.8	Rules After Path Allocation	48
	8.1 Non-usage of allocated train path	
4.8	8.2. Rules of Cancellation	49
4.9.	International Timetabling Process Redesign (TTR)	50
4.9	9.1. Objectives of TTR	50
5. SER	VICES AND CHARGES	51
5.1	Introduction	51
5.2	Charging Principles	52
5.2	Minimum Access Package and Charges	52
5.4	Additional Services and Charges	
5.5	Ancillary Services and Charges	
5.6	Discounts	
5.7	Performance Scheme	62
5.8	Changes to Charges	63
5.9	Billing Arrangements	63
5.10	Tariff system	63
6. OPE	RATIONS	65
6.1	Introduction	65
6.2	Operational Rules	65
6.3	Operational Measures	65
6.3	3.1. Principles	65
	3.2. Operation regulation	
6.3	3.3. Foreseen and Unforeseen problems	66
7. SER	VICE FACILITIES	67
7.1.	Introduction	
7.2.	Service Facility Overview	
7.3.	Service Facilities Managed by IŽS	
7.3	3.1. Common Provisions	67
7.3	3.2 Use of station buildings in the function of passenger traffic	67
7.3	3.3 Freight Terminals	68
7.3	3.4 Marshalling Yards and Train Formation Facilities, including Shunting Facilities	70
	3.5 Storage Sidings	
	3.6 Maintenance facilities	
	3.7 Other Technical Facilities, including Cleaning and Washing Facilities	
7.3	3.8 Maritime and Inland Port Facilities	78
7.3	3.9 Relief Facilities	79
	3.10 Refuelling Facilities	
	PPENDICES	
	lix 1: Organizational chart of "Infrastructure of Serbian Railways" JSC	
Append	lix 2: Internal regulations (documents) and technological procedures	84



Appendix 3.1. Loading Gauge ŽS I	85
Appendix 3.2. Loading Gauge UIC-GA	86
Appendix 3.3. Loading Gauge UIC-GB	87
Appendix 3.3a Loading Gauge UIC-GC	88
Appendix 3.4. Electrified lines	89
Appendix 3.5 Power supply facilities	
Appendix 3.6 Overview of signaling & safety devices equipping level	94
Appendix 3.7 Overview of telecommunication devices equipping level	98
Appendix 3.8. List of service points where it is possible to perform the transshipment of dangerous goods	s 105
Appendix 3.9. Alternative transport routes	
Appendix 3.10. Facilities for rolling stock maintenance	. 111
Appendix 3.10a. Information on the service facility managed by Nelt Co	. 113
Appendix 3.11. Railway infrastructure development projects	. 115
Appendix 4.1. Request for train path allocation (form)	. 116
Appendix 4.1a. Request for train path allocation (e-papir)	. 117
Appendix 4.2. Instruction for completion of the Request for train path allocation	
Appendix 4.3. Deadlines for annual 2023/2024 timetable preparation	
Appendix 4.4. Deadlines for amendments to annual 2023/2024 Timetable	. 123
Appendix 5.1. Overview of railway lines on which train running is possible when they are manned only	with
engine driver	. 124
Appendix 5.2. Overview of the lines fulfilling the conditions for train running with an engine driver only	125
Appendix 5.3. Geometry of pantograph (current collector) TIP POS - 254/III used on IŽS network	. 126
Appendix 6. Register of infrastructure data	. 127
Appendix 7. Overview of primary train delay causes	
Appendix 8 Overview of platforms and arranged surfaces in service points	. 149
Appendix 9 Method for calculation of electricity consumption for train traction	. 167
Appendix 10 Railway node boundaries	. 168



6

TERMS AND ABBREVIATIONS

Terms:

Public railway infrastructure

means the entire railway infrastructure constituting a network operated by the infrastructure manager, but not including the railway lines and secondary tracks (industrial railway lines and industrial tracks) connected to the network;

Infrastructure Manager is a public enterprise or a company responsible for construction, exploitation, maintenance, and rehabilitation of railway infrastructure on the network, as well as for participation in its development within the general policy of infrastructure development and financing;

Railway Undertaking

is a company or other legal entity, registered for the prevailing activity of provision of freight and/or passenger railway transport services, to whom the license was issued, with an obligation to provide train traction or that provides train traction only. In terms of access to railway infrastructure, service facilities and services in connection to performing of railway transport, a railway undertaking is also a company or other legal entity that performs railway transport for its own purposes and to whom the license for transport for its own purposes was issued;

Freight Terminal

is a facility along the railway lines with freight transport, specifically arranged in order to enable loading of goods onto the freight trains and/or unloading of goods from such trains, as well as integration of services of railway freight transport with the services of road, maritime, inland waterway and air transport, i.e. forming or changing the composition of freight trains, and, if necessary, it is used to implement the border procedures at the borders with other countries;

Transport License

is a document by which a relevant licensing authority confirms the capacity of a company or other legal entity, registered for provision of the activity of public transport of goods and/or passengers, to provide railway transport services as a railway undertaking, which can be limited to the provision of certain types of services or the provision of railway transport for own purposes;

Applicant

means a railway undertaking or an international grouping of railway undertakings, or other persons or legal entities, such as competent authorities, consignors, forwarding agents or combined transport operators, having the commercial interest for provision of public service or commercial interest for allocation of railway infrastructure capacity;

Ad hoc request

is a request for individual train paths submitted during the validity of the established timetable;

Network

is a network of railway lines, including the connecting lines and secondary tracks, with elements of railway infrastructure, operated by the Infrastructure Manager; intended for railway transport of goods and/or passengers, as well as for transport for own purposes, which can be performed by railway undertakings according to the principle of transparent and non-discriminatory



access to the network;

Path

is the capacity of railway infrastructure necessary for train movement between two service points, within the envisaged period of time and under the precisely determined technical and technological conditions on the public railway infrastructure;

during a certain period of time;

Timetable

is a formal document of the public railway infrastructure manager setting out the schedule of operation for passenger and freight trains as well as for trains operated for own purposes on the public railway infrastructure of the infrastructure manager;

Infrastructure capacity

is a possible number of train paths for timetabling on the particular part of public railway infrastructure over a given period of time;

Congested infrastructure

is a section of railway infrastructure for which infrastructure capacity demand cannot be completely satisfied during certain time periods, even after different infrastructure capacity requests have been coordinated;

Path allocation

is the allocation of public railway infrastructure capacities by the infrastructure manager;

Access right

is the right of a railway undertaking to use the railway infrastructure;

Coordination

is a process whereby the infrastructure manager and applicants make an adjustment of individual requests for path allocation;

Safety Certificate

means evidence that a railway undertaking has established the safety management system and that it meets the requirements set out in the technical specifications of interoperability, national safety regulations and other relevant regulations in order to control the risks and perform safe railway traffic operations on the network;

Competent institution, Relevant authority (body)

is an authority entitled to adopt various decisions relating to particular fields;

Relevant Railway Authority is an authority authorised to act regarding the administrative issues in the railway sector of the Republic of Serbia (Directorate for Railways or the Ministry of Construction, Transport and Infrastructure, as the case may be).

Service Facility
Operator

is an entity responsible for operating one or more service facilities or for providing one or more services to railway undertakings (basic, additional and/or accompanying), including operating of railway infrastructure which



forms a part of a service facility.

Information about service facility

is a document containing detailed information necessary for access to a service facility and services (basic, additional and accompanying) with reference to performing of railway transport provided by the operator in that service facility.



The abbreviations used in the Network Statement have the following meanings:

ATC Automatic Train Control

AGC European Agreement on Main International Railway Lines

AGTC European Agreement on Important International Combined Transport Lines and Related

Installations

EU European Union FTE Forum Train Europe IM Infrastructure Manager

MCTI Ministry of Construction, Transport and Infrastructure of the Republic of Serbia

MF Ministry of Finance of the Republic of Serbia

NS Network Statement
DG Dangerous goods
OSS One-Stop-Shop

RID (2017) Regulations concerning the international carriage of dangerous goods by rail

RNE RailNetEurope (European Infrastructure Managers Association)

UIC International Union of Railways

DR Directorate for Railways – Regulatory Body in the Republic of Serbia

IŽS "Infrastructure of Serbian Railways" JSC

EMU Electric multiple-unit set DMU Diesel multiple-unit set

TOR Top of rail

RS Republic of Serbia

LTDG Law on Transport of Dangerous Goods ("Official Gazette of the RS" no. 106/2016,

83/2018, 95/2018 (other law), 10/2019 (other law))

GSM-R Global System for Mobile Communications – Railway

ERTMS European Rail Traffic Management System

ETCS European Train Control System



1. GENERAL INFORMATION

1.1 Introduction

"Infrastructure of Serbian Railways" JSC (hereinafter IŽS) is a joint stock company for the management of public railway infrastructure (hereinafter: railway infrastructure), founded by the Republic of Serbia.

Railway infrastructure represents goods in general use, owned by the Republic of Serbia, that can be used by railway undertakings, on equal terms, in accordance with the Law on Railways.

Management of railway infrastructure is an activity of general interest.

Railway infrastructure includes permanent way and substructure, tunnels, bridges and other track structures, station tracks, level crossings including devices for securing of level crossings; safety, signaling and telecommunication installations on open lines, in stations and marshalling yards, including the plants for generating, transforming and distribution of electric energy for signaling and telecommunications; buildings for such installations or plants; track brakes; plants for transformation and transmission of electric energy for train traction: 110 kV two-phase transmission lines, sub-stations except for 110 kV distribution switchgear in such substation, supply cables between substations and contact wire, catenary and girders, third rail with beams, lighting installation for traffic and safety needs, service points' buildings and other facilities on trackside land used for regulation of railway traffic including the part of the equipment for calculation and charging of transport charges and buildings for railway infrastructure maintenance, accesses for passengers and goods, including road access and access to passengers for arrival and departure of pedestrians, track-side land and the airspace above the track, 12 m high, i.e. 14m high at over 220kV overhead power lines, measured from the top of rail.

The Network Statement is a document that contains all the information in accordance with the Law on Railways of the Republic of Serbia ("Official Gazette of the RS" No. 41/18 and 62/23).

The document is compliant to all the norms set forth under the guidelines provided by the association RailNetEurope (hereinafter RNE) and shall be used as informative material for the interested railway undertakings. Moreover, the Network Statement has been harmonized with relevant EU Directives.

Network Statement provides general information on railway network, terms and conditions for access to railway infrastructure, principles and criteria for allocation of capacities, principles for charge calculation and their amounts, procedures for dispute resolution and other important details for usage of services provided to railway undertakings.

Infrastructure Manager Basic Information

Joint Stock Company for Public Railway Infrastructure Management "Infrastructure of Serbian Railways", Belgrade (hereinafter: Company) was founded with the Decision on founding of Joint Stock Company for Public Railway Infrastructure Management ("Official Gazette of the RS", no.60/15 and 73/15) and registered in the registry of Serbian Business Registers Agency, under the number BD 69692/2015 from August 10, 2015.

The founder of the Company is the Republic of Serbia, as the sole stakeholder of the Company, of behalf of which the founder's right is enforced by the Government of the Republic of Serbia, Belgrade, Nemanjina 11, company number 07020171. The Company is under the jurisdiction of the Ministry of Construction, Transport and Infrastructure.

Business company name: Joint Stock Company for Public Railway Infrastructure Management "Infrastructure of Serbian Railways", Belgrade

11

Abbreviated Company Name: "Infrastructure of Serbian Railways" JSC



Company Headquarters is in Belgrade, and the address of company's headquarters is 6 Nemanjina, Belgrade.

The main activity of company is "Service activities in land transport", activity code is 5221.

Company Reg. No is 21127094, TIN 109108420.

Company Business Accounts are 205-222959-26 and 160-438771-53.

The main activity of the Company includes: Service activities in land transport. The activity includes the management of public railway infrastructure in the segment of maintenance of public railway infrastructure, organization and control of railway traffic, provision of access and use of public railway infrastructure to all interested railway undertakings and protection of public railway infrastructure. The company performs the activity of general interest in accordance with the law. The company may also perform other activities in accordance with the law. The company performs the activities and services in domestic and international trade in accordance with the law.

Responsible persons: Acting General Manager Nebojša Šurlan, PhD Tel.: +381 11 3618 330 kabinet.infrastruktura@srbrail.rs

Infrastructure Manager Organisational Chart

The organizational structure of Joint Stock Company for Public Railway Infrastructure Management "Infrastructure of Serbian Railways", Belgrade is based on the Rulebook on organization and systematization of operations of Joint Stock Company for Public Railway Infrastructure Management "Infrastructure of Serbian Railways", Belgrade.

Joint Stock Company for Public Railway Infrastructure Management "Infrastructure of Serbian Railways", Belgrade, (hereinafter: the Company), in order to perform the activities of management of public railway infrastructure, is organized according to the groups of operations, as follows:

- organization and control of railway traffic,
- maintenance of railway infrastructure,
- economic affairs,
- investments.
- human resources and common affairs, and
- operations that are organizationally related to the General Manager's Office.

The Company operations are performed within its departments, divisions, sections, units, technical-technological divisions, stations and operational sections and other lower organizational forms.

The management of public railway infrastructure includes the maintenance of public railway infrastructure, the organization and control of railway traffic, the provision of access and use of public railway infrastructure to all interested railway undertakings, the protection of public railway infrastructure, as well as the performing of investor function in construction and reconstruction of public railway infrastructure.

The following operations are also performed within the Company: traffic engineering, civil engineering and electrical engineering operations, development, investment and project management operations, as well as common affairs: financial, planning and analysis operations, restructuring and cooperation with international financial institutions, accounting, public procurement and warehousing operations, human resources management, occupational health and safety, operations related to property and inventory-taking, information technologies implementation and development operations, internal safety, international affairs and ethic's operations. Furthermore, in order to implement the operative, professional and administrative functions within the Company, the operations which are organizationally related to the General Manager's Office are also performed.



The operations referred to in the previous paragraph are performed within:

- 1. Traffic Department,
- 2. Railway Infrastructure Access Department,
- 3. Centre for Relief Train Operations,
- 4. Centre for Infrastructure Technical Monitoring,
- 5. Civil Engineering Department,
- 6. Electrical Engineering Department,
- 7. Finance Department,
- 8. Accounting Department,
- 9. Centre for Planning, Analysis and Restructuring,
- 10. Procurement and Central Warehousing Department,
- 11. Development Department,
- 12. Investment Department,
- 13. Human Resources and General Affairs Department,
- 14. IT Department,
- 15. Centre for Security,
- 16. Real Estate Department,
- 17. Inventory-Taking Department,
- 18. Centre for International Affairs,
- 19. Ethic's Office,
- 20. Company's Management Secretariat,
- 21. Legal Department,
- 22. Centre for Internal Audit,
- 23. Centre for Internal Control,
- 24. Centre for Safety Management System,
- 25. Media Centre,
- 26. Department for Management of EU-Funded Projects (PIU).

The Organizational Chart of "Infrastructure of Serbian Railways" JSC is provided in Annex 1.

Contact details

"Infrastructure of Serbian Railways" JSC contact details are the following:

Acting General Manager Nebojša Šurlan, PhD Tel.: +381 11 3618 330 kabinet.infrastruktura@srbrail.rs

Traffic Department Nemanjina 6 11000 Belgrade, Serbia Serbia

Tel.: +381 11 3618 214 Fax: +381 11 3616 814 sektor.sp@srbrail.rs

Railway Infrastructure Access Department Nemaniina 6

11000 Belgrade, Serbia

Serbia

Tel.: +381 11 3618 214 Fax: +381 11 3616 814 sektor.pzi@srbrail.rs



Civil Engineering Department Nemanjina 6 11000 Belgrade, Serbia Tel: +381 11 3618 248

Fax: +381 11 3616 874 infr.sektorzagp@srbrail.rs

Electrical Engineering Department

Nemanjina 6

11000 Belgrade, Serbia Tel: +381 11 3618 241 Fax: +381 11 3618 130

 $\underline{etp@infrazs.rs}$

Centre for Relief Train Operations Nemanjina 6 11000 Belgrade, Serbia

Tel.: +381 11 3620 899 Fax: +381 11 3620 899 direktor.tkp@infrazs.rs

Procurement and Central Warehousing Department Nemanjina 6 11 000 Belgrade, Serbia Tel.:+381 11 3620 094 nabavke.infra@srbrail.rs

Finance Department Nemanjina 6 11 000 Belgrade, Serbia Tel.: +381 11 3618 465

Fax: +381 11 3618 465 finansijeizs@srbrail.rs

1.2 Purpose of the Network Statement

The purpose of this Network Statement is provision of single source basic information to the users of services provided to railway undertakings on the railway infrastructure operated by IŽS.

The Network Statement is a document which sets out the detailed general rules, deadlines, procedures and criteria related to the manner of calculation of charges and allocation of infrastructure capacities, including other relevant information necessary for submitting the request for infrastructure capacity allocation.

The Network Statement will be published on the web site of "Infrastructure of Serbian Railways" JSC, www.infrazs.rs, and the decision on its adoption will be published in the "Official Gazette of ŽS".

1.3 Legal Aspects

The functioning of infrastructure and traffic on the network operated by "Infrastructure of Serbian Railways" JSC is regulated by:

- legislation of the Republic of Serbia,
- formal documents of the Infrastructure Manager "Infrastructure of Serbian Railways" JSC,
- formal documents and technological procedures of the railway undertakings falling within the scope indicated in the above legislation.



1.3.1 Legal Framework

Regulations of the Republic of Serbia

Regulations of the Republic of Serbia of particular importance to this Network Statement include the following documents:

- Law on Railways ("Official Gazette of the RS", No. 41/18 and 62/23);
- Law on Interoperability of Railway System ("Official Gazette of the RS", No. 62/23);
- Law on Safety in Railway Traffic ("Official Gazette of the RS", No. 41/18")
- Regulation on Categorization of Railway Lines that belong to Public Railway Infrastructure ("Official Gazette of the RS", No. 92/20, 6/21, 33/22 and 63/23);
- Rules on Railway Infrastructure Elements ("Official Gazette of the RS", No.30/19);
- Rules on the Timetable ("Official Gazette of the RS", No. 58/19 and 1/2020);
- Regulation on Methodology for Valuation of the Elements for Determining the Level of Charge for the Use of Railway Infrastructure ("Official Gazette of the RS", No. 122/14);
- Rules on the Manner of Transport and Mandatory Operational Monitoring of Dangerous Goods Carried by Rail, as well as on the Obligations of the Participants in the Transport of Dangerous Goods by Rail and Emergencies ("Official Gazette of the RS", No. 81/15);
- Rules on training programme and method of knowledge checking of employees and of participants of dangerous goods transport in the railway transport, as well the manner in which the documentation is processed and their training ("Official Gazette of the RS", No. 81/15);
- Law on Transport of Dangerous Goods, passed by the National Assembly of the Republic of Serbia ("Official Gazette of the RS", No. 104/2016-34, 83/2018-57, 95/2018-389 (other law), 10/2019-13 (other law));
- Rules on Mandatory Elements of the Contract on the Use of Railway Infrastructure ("Official Gazette of the RS", No. 8/2019);
- Rules on Special Loads Transport ("Official Gazette of the RS", No. 74/19);
- Regulation on the Manner of Conclusion and Content of Framework Agreements for Allocation of Railway Infrastructure Capacity ("Official Gazette of the RS" No. 74/19);
- Regulation on Particularities of Procedures and Criteria Applicable to Access to the Services Provided in Service Facilities ("Official Gazette of the RS" No. 57/19 and 13/20);
- Rules on the Elements of Service Facility Information ("Official Gazette of the RS" No. 66/19).

International Regulations

When using the allocated train path, the railway undertaking must abide by all legal norms contained in the sources of international law (Convention concerning International Carriage by Rail (COTIF), its annexes, agreements and protocols governing the cross-border railway traffic and border control, UIC standards and any other relevant international regulations) as well as in the national laws and bylaws.

Formal documents of the Infrastructure Manager

Internal regulations (formal documents) and technological procedures of the Infrastructure Manager are listed in Annex 2.



1.3.2 Legal Status and Liability

The Network Statement is based on the legal framework defined in section 1.3.1. In case of any ambiguities or legal proceedings, the relevant provisions of the legislation of the Republic of Serbia will apply.

The present Network Statement has been developed on the basis of the information available at the moment of drafting thereof. IŽS is liable for accuracy of the information given in the present Network Statement. All regulations and technical documentation which become effective upon publishing of this Network Statement shall apply and shall be taken into consideration on the occasion of construing this Network Statement.

IŽS is not liable for the accuracy of data published herein, which are submitted by the service facility operators.

1.3.3 Appeals Procedure

Appeals procedure in respect of the Network Statement, and in respect of other formal documents of the Infrastructure Manager relating to the path allocation procedure and use of railway infrastructure, is governed by the Law on Railways.

The function of the regulatory body for the railway sector is performed by the Directorate for Railways (hereinafter: the Directorate), as a separate organization which runs the railway-specific state administration affairs as set forth in the Law on Railways.

The scope of the Directorate for Railways has been set out in Articles 118-129 of the Law on Railways ("Official Gazette of the RS" No. 41/2018 and 62/23) and by the provisions of the Law on Safety of Railway Transport ("Official Gazette of the RS" No.41/2018).

Article 120 of the Law on Railways provides that the Directorate is in charge of the following:

- regulation of railway services market;
- licensing of railway undertakings;
- passenger rights;
- safety in railway traffic and interoperability of railway system;
- cableway;
- realization of international cooperation within its scope of competence;
- other tasks in accordance with this law and other laws governing the area of safety in railway transport, interoperability of railway system and cableways for transport.

The applicant for train path allocation may lodge a complaint with the Directorate for Railways against the decision made by the Infrastructure Manager to reject its application for path allocation or against the established conditions for supply of infrastructure capacity, and also when it is not satisfied with the train path allocation procedure and its outcome, subject to payment of a fee in the amount of administrative fee charged for the appeals to the authority.

As a regulatory body, the Directorate deliberates, in the segment of regulation of railway services market, on the complaints lodged by applicants for train path allocation, especially taking into account any potential unfair treatment or discrimination by the Infrastructure Manager or railway undertakings, in connection with:

- (1) the Network Statement,
- (2) the criteria set out in the Network Statement,
- (3) the train path allocation procedure and its outcome,
- (4) the method for determining the charge for the use of train path;
- (5) the level or structure of charges for the use of train path which it is or may be obliged to pay,
- (6) information about service facilities;



(7) the application of provisions of article 13 of the Law on Railways and particularly of access and charges.

The decision of the Directorate is final. The appeal against it may be lodged with the Administrative Court within 30 days of its receipt.

1.4 Structure of the Network Statement

The structure of 2024 Network Statement is in accordance with the general structure for network statements of the European Railway Association (RailNetEurope association) which is applied by most infrastructure managers in Europe in the process of network statement preparation.

The general structure of Network Statement is reviewed as necessary and the latest version is available on the RNE's web-site. The objective of general structure is that all applicants and interested parties may find the same information at the same place in the Network Statement.

The Network Statement consists of 7 chapters that make up the basic document and a series of attachments that contain additional information.

Table No 1. Network Statement Structure

No	Chapter	Description
1.	General information	Contains the general information about Network Statement and contacts
2.	Infrastructure	Contains the description of the network operated by JSC "Infrastructure of Serbian Railways" (IŽS)
3.	Access conditions	Provides a specification of conditions, which will be met by the railway undertaking, prior to gaining the track access
4.	Capacity allocation	Provides the principles and criteria for infrastructure capacities allocation
5.	Services and charges	Provides an overview of services provided by "Infrastructure of Serbian Railways" JSC and charges
6.	Operations	Contains operational rules
7.	Service facilities	Provides an overview of service facilities connected to rail network operated by IŽS

1.5 Validity Period, Updating and Publishing

1.5.1 Validity Period of the Network Statement

This Network Statement shall be valid during the timetable validity period, from December 10th, 2023 to December 14th, 2024.

The Network Statement shall be published not later than two months prior to the commencement of the final deadline for submission of applications for path allocation and shall remain valid during the entire timetable validity period.

1.5.2 Updating Process

The Network Statement will be updated in case of change of important pieces of information published in the Network Statement. Any amendment to the Network Statement will be published separately in the "Official



Gazette of Serbian Railways", whereas the updated (amended) Network Statement will be published on the "Infrastructure of Serbian Railways" JSC website.

1.5.3 Publishing, Distribution and Availability of the Network Statement

The Network Statement will be published on the "Infrastructure of Serbian Railways" JSC website (www.infrazs.rs), both in Serbian and English languages.

If so requested by a railway undertaking, "Infrastructure of Serbian Railways" JSC may provide the Network Statement or a part of it, free of charge, in electronic format.

1.6 Contacts

Contacts relevant for information contained in the Network Statement:

"Infrastructure of Serbian Railways" JSC Railway Infrastructure Access Department 6, Nemanjina St. 11000 Belgrade Serbia Tel.: +381 11 3618 214

Fax: +381 11 3616 814 sektor.pzi@srbrail.rs

1.7 Cooperation Between European IMs/ABs

1.7.1 Rail Freight Corridors

The Pan-European Corridor X from Salzburg in Austria to Thessaloniki in Greece stretches via the infrastructure network of "Infrastructure of Serbian Railways" JSC. On the territory of the Republic of Serbia, on the network of "Infrastructure of Serbian Railways" JSC, Corridor X includes the following railway lines from Šid to Preševo:

- Belgrade Šid State border,
- Belgrade Mladenovac Niš,
- (Belgrade) Rakovica Jajinci Mala Krsna Velika Plana,
- Niš Preševo State border.

The following branches connect to the primary route of the Corridor:

- Xb, (Budapest) Novi Sad Belgrade (railway line (Belgrade) Stara Pazova Subotica), and
- Xc, Niš Dimitrovgrad (Sofia Istanbul) (railway line Niš Dimitrovgrad State border).

Infrastructure of Serbian Railways is a member of Railway Freight Corridor Alpine-Western Balkans (RFC 10). The corridor connects five countries: Austria, Slovenia, Croatia, Serbia and Bulgaria. The corridor route goes from Svilengrad in Bulgaria, via Sofia, Belgrade, Zagreb to Zidani Most in Slovenia, where the route branches off to two routes via Maribor, Gratz to Wels and via Ljubljana, Villach to Salzburg. The corridor covers 2,114 km of main lines and 31 km of connecting lines. There are 21 intermodal terminals and 12 marshalling yards on the corridor.

More details on the corridor are available on its website https://www.rfc-awb.eu/.

1.7.2 RailNetEurope

RailNetEurope association (hereinafter RNE) was established in January 2004 by virtue of an agreement between 12 Infrastructure Managers from the entire Europe, and their number is constantly rising.



Through its members, RNE operates over 230,000 km long railway lines, including the important ferry lines, and cooperates with more than 120 railway undertakings in international traffic and with more than 300 railway undertakings that, for the time being, operate only in the domestic traffic of the members.

The main efforts are put towards enhancing the access conditions and performance of international railway transport, particularly with respect to operability. To achieve this, RNE is focused on the overall process of international transport operations. It starts with harmonization of mid-term and long-term planning of particular members, joint marketing and sales approach, appropriate planning and operation, and ends with provision of services after transport has been performed, such as monitoring, control and assessment of performed transport.

One of the first steps towards progressive harmonization was creation of a structure model for the preparation of Network Statement, applied by all RNE members.

One of the most important RNE steps was creation of an international network of One Stop Shop offices.

The list of all RNE members and further information on this association may be found at www.railneteurope.com.

"Infrastructure of Serbian Railways" JSC is a full member of the association from April 21, 2016.

One Stop Shop - OSS

Infrastructure Managers have opened national One Stop Shop (OSS) offices that jointly make up a network of contact points for the users within the RNE. As regards the international path allocation applications, the users only need to contact one of these OSSs that will initiate the entire process of international path allocation.

In close cooperation with other IMs, the contacted OSS will:

- offer support and information to undertakings on the entire range of Infrastructure Managers' products and services along the whole route;
- provide all information on the conditions for access to the infrastructure of any Infrastructure Manager within the RNE;
- process the applications for international path allocation within the RNE;
- make sure that all the applications for the next year's Timetable are timely taken into account during preparation of the annual Timetable;
- provide offers for railway paths on the entire route in international traffic.

In accordance with its motto "one face to the customer", the OSS provides professional and efficient assistance via all border crossings, underpinned by transparent procedures based on trust and non-discrimination. The list of contacts by member countries is available at www.railneteurope.com.

"Infrastructure of Serbian Railways" JSC, as a RNE member, conducts intensive activities on defining the procedures so as to implement the OSS in the near future in the railway sector of the Republic of Serbia.

RNE tools

Since 2005, the RNE has taken over the full responsibility for preparation of the international timetable and the support to its activities; it operates the following information systems: for path coordination - PCS (Path Coordination System), for charging - CIS (Charging Information System) and for train information - TIS (Train Information System).

19

PCS



PCS (Path Coordination System) – is an international path request coordination system for path applicants i.e. railway undertakings, infrastructure managers and allocation bodies. This web-based application optimises international path coordination by ensuring that path requests and offers are harmonised by all involved parties. The input for international path requests needs to be entered only once into the system – either via the domestic application or directly into the PCS. More information is available on: http://pcs.RNE.eu/.

CIS

CIS (Charging Information System) – is an infrastructure charging information system for railway undertakings, infrastructure managers and allocation bodies. This web-based application provides fast information on charges related to the use of the European rail infrastructure and estimates the charge for the use of international train paths within minutes. This is an umbrella application for various national rail infrastructure charging systems. More information is available on: http://cis.RNE.eu/.

TIS

TIS (Train Information System) – is a web-based application which manages the operation of international trains by delivering information on movements of international passenger and freight trains in real time. These data are obtained directly from the system. More information is available on: http://tis.RNE.eu/.



2. INFRASTRUCTURE

2.1 Introduction

The purpose of this section is to provide the information on the railway infrastructure owned by the Republic of Serbia and managed by IŽS, to provide the description and overview of the characteristics of the railway lines and appertaining facilities and equipment that can be used by all those to whom the access to and use of infrastructure have been granted in accordance with the provisions of the Law on Railways. Other information on the IŽS network can be found on the website www.infrazs.rs.

Information on the railway infrastructure published in this document is based on the facts that were familiar at the time of its preparation. All changes occurring after publishing of this document will be updated on the website www.infrazs.rs.

2.2 Extent of Network

The total structural length of standard-gauge lines on the territory of "Infrastructure of Serbian Railways" JSC network amounts to 3348.1 km, out of which 3059.4 km of single-track and 288.7 km of double-track lines. The above-mentioned line length includes 1744.4 km of main lines and 1603.7 km of other lines. The total of 1301.9 km of open tracks have been electrified, together with main running tracks (1013.2 km of single-track and 288.7 km of double-track lines).

The total length of electrified lines - open tracks and main running tracks is 1,592 km. All the above data relate to standard-gauge 1435 mm tracks. More detailed information is available in Appendix 6.

In addition, "Infrastructure of Serbian Railways" JSC also operates the museum-tourist railway line - "Shargan Eight" - which is 22.5 km long and whereof track gauge is 760 mm.

2.2.1 Limits

In terms of ownership and management of public railway infrastructure, there is only one railway network in the Republic of Serbia and this is a state-owned network, managed by IŽS. Therefore, the term "limit" also means state borders which at the same time represent borders with the neighbouring railway networks.

The IŽS railway network borders with the neighbouring railway networks are the following border stations: Subotica, Horgoš, Kikinda, Vršac, Bogojevo, Šid, Brasina, Preševo, Đeneral Janković, Vrbnica and Dimitrovgrad.

Upon crossing of state borders, the track gauge remains unchanged.

The type of traction is changed only at the border crossing with the Republic of Bulgaria, at Dimitrovgrad station on the railway line Niš-Dimitrovgrad-State Border.

2.2.2 Connecting Railway Networks

The railway network of the Republic of Serbia is connected with the railway networks of the following seven countries: Croatia, Hungary, Romania, Bulgaria, North Macedonia, Montenegro and Bosnia and Herzegovina. Traffic can be organized via ten border crossings, while one border-crossing is under the control of UNMIK.

For more detailed information please refer to Table No 2. The names of neighbouring countries' stations in the table are given in authentic form, as registered in the official timetables.

The term joint border station means a border station in which border control is jointly performed by the competent state authorities, as well as traffic handover between the railway undertakings. Joint border stations are governed by bilateral state agreements. Performing of traffic handover in other border stations is within decision—making domain and agreement between the railway undertakings.



Table No 2. Border crossings, border railway lines and border stations

	Neighbouring country	Border railway lines	Border stations	Neighbouring infrastructure managers	Note
1	Creatio	Šid-State Border -Tovarnik	Šid Tovarnik	HŽI	
1	Croatia	Bogojevo-State Border- Erdut	Bogojevo Erdut	HŽI	
2	Цинсови	Subotica-State Border- Kelebija	Subotica Kelebia	MAV Zrt	
2	Hungary	Horgoš-State Border- Roszke	Horgoš Roszke	MAV Zrt	
3	Romania	Vršac- State Border - Stamora Moravita Vr Sta Mo		CFR SA	
		Kikinda-State Border- Jimbolia	Kikinda Jimbolia	CFR SA	
4	Bulgaria	Dimitrovgrad-State Border Dragoman	Dimitrovgrad Dragoman	NKŽI	Joint border station Dimitrovgrad
		Preševo- State Border Tabanovci	Preševo/ Ristovac Tabanovci	IŽRSM	Joint border station Tabanovci
5	North Macedonia	Đeneral Janković - State Border -Volkovo	Đeneral Janković	IŽRSM	Temporary under the supervision of UNMIK Railways
6	Montenegro	Vrbnica - State Border – Bijelo Polje	Vrbnica / Prijepolje freight Bijelo Polje	ŽICG	Joint border station Bijelo Polje
7	Bosnia and Herzegovina	Brasina - State Border – Zvornik Novi	Brasina Zvornik Novi	ŽRS	

Within the national network, the public railway infrastructure operated by IŽS is connected with other railway infrastructures in the Republic of Serbia. The sidings of Elektroprivreda Srbije and HBIS Group Serbia Iron & Steel" d.o.o. are connected to IŽS national railway network.

These sidings are used for transport of goods for own needs (industrial railways) and they do not belong to the national railway network.

Railway infrastructure operated by IŽS is also connected with a number of railway industrial sidings owned by the business entities.

For other information on railway infrastructure operated by IŽS, which are not contained and presented herein, please contact IŽS at the following address:

"Infrastructure of Serbian Railways" JSC Railway Infrastructure Access Department 6 Nemanjina St., 11000 Belgrade, Serbia

Phone.: +381 11 3618 214 Fax: +381 11 3616 814 sektor.pzi@srbrail.rs



2.3 Network Description

2.3.1 Geographic data and types of railway lines

General network information is given in Table No. 3.

Table No 3. Structural length of the lines within the network

Total network length	3 348.1 km
Single-track lines	3 059.4 km
Double track lines	288.7 km
Narrow-gauge lines	22.5 km*
Non-electrified lines	2 046.2 km
Electrified lines	1 301.9 km

^{*} Narrow-gauge line Šargan Vitasi – Mokra Gora – State Border (Višegrad)

Types of railway lines

Pursuant to the Regulation on categorization of railway lines that belong to public railway infrastructure ("Official Gazette of the RS", No. 92/20, 6/21, 33/22 and 63/23) applied by the "Infrastructure of Serbian Railways" JCS, railway lines are classified as main lines, regional lines, local lines, shunting lines and museum-tourist lines.

Pursuant to the law governing the railways, railway lines are classified as follows:

- 1. main lines- of importance to international and domestic service;
- 2. regional lines of importance to regional and local service;
- 3. local lines of importance to local service;
- 4. shunting lines of importance to business entities,
- 5. museum-tourist railway lines.

Main lines with associated line number are:

- 101 Belgrade Centre-S. Pazova-Šid-State border-(Tovarnik);
- 102 Belgrade Centre Junction "G"- Rakovica-Mladenovac-Lapovo-Niš-Preševo-State border-(Tabanovce);
- 103 (Belgrade Centre)- Rakovica-Jajinci-M.Krsna-V.Plana;
- 104 (Jagodina) Ćuprija Junction Ćuprija-Paraćin;
- 105 (Belgrade Centre)-S.Pazova-N.Sad-Subotica-State border-(Kelebia);
- 106 Niš-Dimitrovgrad-State border-(Dragoman);
- 107 Belgrade Centre-Pančevo Main St.-Vršac- State border-(Stamora Moravita);
- 108 (Belgrade Centre)-Resnik-Požega-Vrbnica- State border-(Bijelo Polje);
- 109 Lapovo-Kraljevo-Lešak-Kosovo Polje-Djeneral Janković- State border-(Volkovo);
- 110 Subotica-Bogojevo-State border-(Erdut);
- 111 Belgrade Marshalling Yard "A"-Ostružnica-Batajnica;
- 112 Belgrade Marshalling Yard "B"-Ostružnica;
- 113 Belgrade Marshalling Yard "A"-Junction, B"- Junction "K/K1"-Resnik;
- 114 Ostružnica-Junction "B"-(Junction "K/K1");
- 115 Belgrade Marshalling Yard "B"-Junction "R"- Junction "A"-(Resnik);
- 116 (Belgrade Marshalling Yard "B")-Junction "R"-Rakovica;
- 117 Belgrade Marshalling Yard "A"-Junction "T"-Rakovica;
- 118 Belgrade Marshalling Yard "B"-Junction "T"-(Rakovica);
- 119 Connecting track in the area of Junction "K/K1": (Junction "B")--Points "K"-Points "K1"-(Jajinci);
- 120 (Junction Pančevo Most)-Junction Karadjordjev park-Junction Dedinje-(Junction "G");
- 121 Indjija-Golubinci;
- 122 Novi Sad-Novi Sad Marshalling Yard-Junction Sajlovo;
- 123 By-pass track at the station Mala Krsna: (Kolari)-Junction points 1-Junction points 28-(Osipaonica);
- 124 Junction Lapovo Varoš-Lapovo Marshalling Yard-Lapovo;
- 125 Trupale-Niš Marshalling Yard-Medjurovo;



- 126 Crveni Krst-Niš Marshalling Yard;
- 127 Niš-Junction Most-(Niš Marshalling Yard);
- 128 Connecting track at the station Niš: (Crveni Krst)-Junction points 3-Junction points 4-(Ćele Kula).

Regional lines with associated line number are:

- 201 Subotica-Horgos-State border-(Roszke);
- 202 Pančevo Main St.-Zrenjanin-Kikinda-State Border-(Jimbolia);
- 203 Belgrade Donji Grad (km 7 + 041) Belgrade Danube Junction Pančevo most¹;
- 204 Topčider Passenger Station (km 4 + 195) Junction "G" (Rakovica)²;
- 205 Banatsko Miloševo-Senta-Subotica;
- 206 Pančevo Varoš-Junction "2a"-(Jabuka);
- 207 Novi Sad-Odžaci-Bogojevo;
- 208 (Novi Sad)-Junction Sajlovo-Rimski Šančevi-Orlovat stop;
- 209 Novi Sad Marshalling Yard Junction points 7-Novi Sad Lokoteretna-Sajlovo Junction;
- 210 Orlovat- Junction "1a"-(Lukićevo);
- 211 Ruma-Šabac-Junction Donja Borina-State border-(Zvornik Novi);
- 212 (Platičevo)-Junction "1"-Junction "3"-(Štitar);
- 213 Stalać-Kraljevo-Požega;
- 214 Connecting track at the station Kraljevo: (Mataruška Banja)-Junction points 72-Junction points 73-(Adrani)
- 215 Connecting track at the station Požega: (Uzići)-Junction points 53-Junction points 54-(Dragačevo);
- 216 Smederevo Junction Jezava Radinac Mala Krsna;
- 217 Junction Jezava Smederevo Port;
- 218 Mala Krsna-Bor-Junction ,,2"-(Vražogrnac);
- 219 (Nis) Crveni krst-Zaječar-Prahovo Port;
- 220 (Rgotina)-Junction "3"-Junction "1"-(Trnavac);
- 221 (Barlovo)-Junction "1"-Kuršumlija;
- 222 Kuršumlija-Kastrat;
- 223 Doljevac-Kastrat-Merdare Kosovo Polje;
- 224 Kosovo Polje-Metohija-Peć;
- 225 Kosovo Polje Freight St.-Junc. "1"-(Drenica);
- 226 Vrbas Sombor.

Local lines with associated line number are:

- 301 Subotica-Subotica Factory;
- 302 Subotica-Subotica Hospital;
- 303 Novi Sad (km 1+042)-Novi Sad Ložionica;
- 304 (Podbara)-Junction "3"-Junction "2"-(Kać);
- 305 (Rimski Šančevi)-Junction "1"-Junction "3"-(Podbara);
- 306 Rimski Šančevi-Žabalj;
- 308 (Brasina)-Junction Donja Borina-Zvornik Grad;
- 309 Pančevo Varoš-Pančevo Vojlovica;
- 310 Connecting track at the station Senta: (Čoka)-Junction points 22-Junction points 23-(Orom);
- 311 Markovac-Svilajnac-Despotovac- (Resavica);
- 312 Metohiia-Prizren:
- 313 Vršac Bela Crkva.

² By virtue of the Conclusion adopted by the Government of the Republic of Serbia No 340-2989/2022 dated April 7th, 2022, the Decision of the Shareholders' Meeting of Infrastructure of Serbian Railways JSC on termination of public railway service, dismounting and reconstruction of infrastructure capacities on railway line Topčider Putnička (km 4 + 195 – Junction "G" – (Rakovica) has been approved.



_

¹ By virtue of the Conclusion adopted by the Government of the Republic of Serbia No 340-2986/2022 dated April 7th, 2022, the Decision of the Shareholders' Meeting of Infrastructure of Serbian Railways JSC on termination of railway line Belgrade Donji Grad (km 7+041) – Belgrade Danube – Junction Pančevo Most has been approved.

Shunting lines with associated line number are:

```
401 Vršac-Vršac Vašarište:
```

402 Kikinda-Metanolsko sirćetni kompleks(km 6+413);

403 Bogojevo-Dunavska Obala;

404 Paraćin-Stari Popovac;

405 Surčin-Jakovo-Bečmen:

406 Šid-Sr.Rača Nova-State Border-(Bijeljina);

407 Ovča-Padinska Skela:

408 Sonta – Apatin factory;

409 Bačka Palanka - Gajdobra

Museum-tourist line with its associated number is:

501 Šargan Vitasi – Mokra Gora – State Border (Višegrad).

Due to the technical condition of particular local and shunting lines, traffic is no longer possible on such lines and is currently completely or partially suspended. More details can be found in Appendix 6.

The following IŽS lines belong to main international railway lines according to AGC (European Agreement on Main International Railway Lines):

<u>Direction North – South</u>

E 771 Subotica-Bogojevo

E 79 Belgrade - Vrbnica

E 85 Subotica-Belgrade-Niš-Preševo

-Kraljevo-Djeneral Janković

Direction West - East

E 66 Belgrade-Vršac

E 70 Šid-Belgrade-Niš-Dimitrovgrad

2.3.2 Track Gauges

Track gauge along the network is 1435 mm, except for the museum-tourist line the "Shargan Eight", whose gauge is 760 mm.

2.3.3 Stations and Nodes

Names, km-points and distances in km between particular service points and railway nodes are given in Appendix 6 and Appendix 10.

2.3.4 Loading Gauge

Loading gauge is a limited space viewed as a cross section vertical to the track axis that may not be exceeded by any part of the rail vehicle, whether loaded or empty. The loading gauge registered for all IŽS lines for international traffic is UIC GB, except for parts of the railway lines Valjevo – Kalenić and Grlica - Djeneral Janković, where the registered loading gauge is UIC GA. These loading gauges are in line with the UIC Leaflet 506.

The loading gauge that applies to domestic traffic on IŽS lines is ŽS I. The ŽS I gauge is slightly larger than the UIC GA loading gauge and slightly smaller than UIC GB. The summary of loading gauges is presented in Appendices 3.1.-3.3.

IŽS lines have not been coded for the combined transport gauges in accordance with UIC Leaflet 596-6. However, the measurements that were performed have shown that movements of wagons carrying combined transport load units - such as high cube containers (HCC), semi-trailers and entire road vehicles - are



possible. Movements of such consignments are possible under special safety conditions in the exceptional transport regime.

For further information, please contact IŽS:

"Infrastructure of Serbian Railways" JSC Traffic Department 6 Nemanjina St. 11000 Belgrade Serbia

Tel.: +381 11 3618 214 Fax: +381 11 3616 814 E-mail: sp@infrazs.rs

2.3.5 Weight Limits

In accordance with UIC Leaflet 700, depending on track capacity to bear loads by vehicles on the railway network, various weight limits are applicable and expressed in tonnes per axle and tonnes per linear metre.

The load by a railway vehicle per linear metre is the load of an unloaded or loaded railway vehicle divided by the length of the railway vehicle expressed in metres and measured between tops of uncompressed buffers.

Axle load of a railway vehicle is the load of an unloaded or loaded railway vehicle divided by the number of axles of the railway vehicle.

Based on the above-stated, railway lines were classified into categories (Regulations on classification of railway lines No. 325, published in the Official Gazette of the Community of Yugoslav Railways (ZJŽ) Nos. 7/89 and 9/90). The classification of IŽS railway lines is shown in Table No. 4.

Table No 4: Categories of admissible loads on IŽS network

A denigaible	loods wa	Admissible loads per axle			
Admissible		A	В	C	D
linear metre		16 t	18 t	20 t	22,5 t
1	5.0 t/m	A	B1		
2	6.4 t/m		B2	C2	D2
3	7.2 t/m			C3	D3
4	8.0 t/m				D4

The overview of admissible loads in tonnes per axle and in tonnes per linear metre is presented in Appendix 6.

2.3.6 Line Gradients

In order to determine required train braked weight, the ruling gradients for braking must be determined for each line or track section. The ruling line gradient for braking means the value of its longitudinal gradient, on the basis of which braked weight percentages are determined, i.e. the required train braked weight on a certain line or track section. The longest longitudinal gradient (rising or falling) on a specific line (or section), over the length of 1000 metres or more, is considered to be the ruling gradient of that specific line or section. In determining the ruling gradient for braking, the curve and tunnel related resistances are not taken into consideration.

The ruling resistance of a line or one of its sections means the value of its specific resistance due to gradient, curve and tunnel, on the basis of which train weight i.e. locomotive hauled load is determined.



The overview of ruling gradients and ruling resistances of particular lines is presented in Appendix 6.

2.3.7 Maximum Line Speeds

The maximum permissible speed with respect to line capacity is the maximum speed permitted on a line or line section with respect to the railway line superstructure and its structures (carrying capacity of the track, its lining and levelling, curve radius, points design, etc.), fixed electric traction installations and signalling and interlocking devices on the line, and it may not exceed the lowest one of such speeds.

Restricted speeds are permanently prescribed speeds that are lower than the maximum permissible speed on the railway line and that are applied on a certain section of the railway line due to its technical condition or that are applied while running in the points area.

For further information on maximum permissible speeds and restricted speeds with respect to line capacity, please refer to Appendix 6.

2.3.8 Maximum Train Lengths

The length of each train is determined during the capacity allocation procedure and it is expressed in rounded metres. The maximum permissible length of a train operating on a line, for the purposes of its smooth acceptance and forming in railway stations, at passing points and other service points, is determined on the basis of the maximum permissible train length in certain stations, passing points and other service points along the given line and with respect to usable length of main lines.

Maximum permissible length of a train for station tracks is obtained by subtracting the length of 25 m to be taken up by the locomotive and spare 10 m to be taken up by the train, from the usable track length expressed in metres and determined under the Instructions (Instructions on the technical standards and data for the preparation of timetable implementation, "Official Gazette of ZJŽ Nos. 9/89, 6/91, 8-9/91, 4/92, and 9/92).

Actual length of a train is obtained by totalling the lengths over uncompressed buffers of all vehicles included in the train, except for the locomotive hauling the train, whose length has been taken into account during determination of maximum permissible train length at a station. If a train has double heading, banking locomotive or intermediate-haul locomotive, their lengths must be taken into account when determining the train length.

The overview of distances between the service points and maximum permissible train lengths relative to usable track lengths is presented in Appendix 6.

The provisions of paragraph 2 of this article shall also apply to the length of the passenger train. The passenger train may be longer than the length of the platforms and arranged areas in service points, and if the railway undertaking requires their dwelling in such service points, it must set and ensure the necessary safety measures for passengers in accordance with local and/or other specific circumstances. The overview of platforms and arranged areas in service points is given in Appendix 8 and for further details, please contact IŽS:

"Infrastructure of Serbian Railways" JSC Railway Infrastructure Access Department 6 Nemanjina St. 11000 Belgrade Serbia

Tel.: +381 11 3618 214 Fax: +381 11 3616 814 sektor.pzi@srbrail.rs



2.3.9 Power Supply

IŽS ensures the transmission of required electric energy from the public power supply network of the Republic of Serbia via the fixed electric traction installations (substations) and the catenary for electric train traction. All electrified railway lines have the basic power supply system, which is single-phase AC 25 kV 50 Hz system. The overview of electrified railway lines is presented in Appendix 3.4. The overview of power supply installations is presented in Appendix 3.5.

The power supply system voltage is U=25 kV, and its frequency is f=50Hz. The height of the contact wire are Hkpmin=5000 mm, Hkpnom=5500 mm and Hkpmax=6000 mm. The staggering of the OCL is $p=\pm200$ mm along the straight track, and p=300 mm in curves.

In the 25kV, 50 Hz power supply system, the use of pantograph (current collector) for electric motive power is permitted according to the General Contact Line Catalogue (type POS-III/E). The design of pantograph is shown in Figure No 1.

The basic parameters for the asymmetric pantograph used on IŽS network, with double contact strip and pneumatic actuator, are in accordance with the provisions of UIC Leaflet 608 and are shown in Table No 5.

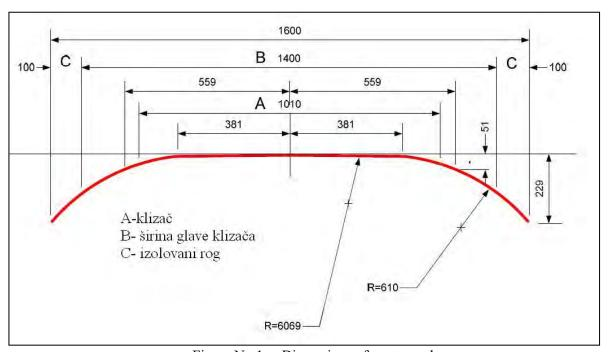


Figure No 1. – Dimensions of pantograph

Table No. 5: Pantograph parameters

Permissible width of horned slipper holder (mm)	Width of metal horns (mm)	Rated current (A)	Height of contact line (mm)	Minimum length of contact strip (mm)	Static force Fa (N	Maximum aerodynamic force Fa (N)	Maximum speed (km/h)	Type of contact strip
1600	1400	400	6200 5500 5000	800	60-90	70	160	graphite

2.3.10 Signalling Systems

Railway signals provide signals by means of which railway staff can mutually communicate in a fast and reliable way about train operation, shunting, permitted and forbidden runnings via a certain location, the



track condition, the need for speed restriction, etc. Some signals are used for preserving of personal safety of railway staff and other persons.

Regulations on types of signals, signal markings and track markings ("Official Gazette of the RS" No.50/20) are applicable to the use of signals and signal markings.

There are eleven types of station track interlocking on the network of "Infrastructure of Serbian Railways" JSC, and they are presented in Appendix 6.

On IŽS network, the main arterial routes are equipped with fully centralized electrical relay signalling & interlocking equipment, as follows:

- Belgrade Center-Niš-Preševo: Siemens SpDrS-64/JZ track circuit system,
- (Belgrade Center) Resnik-Vrbnica: Siemens SpDrS-64/JZ axle counter system,
- Stara Pazova Golubinci: Siemens SpDrS-64/JZ track circuit system,
- Golubinci-Ruma: Siemens SpDrS-64/JZ axle counter system,
- Ruma-Šid: Siemens SpDrS-64/JZ track circuit system,
- Novi Sad-Subotica: Westinghouse track circuit system.

In all stations on Belgrade Center – Novi Sad line section, new electronic signalling and interlocking devices type "DS6-60" with "MMI" electronic control and monitoring system have been installed. Within the upgrade performed on trackside and station electronic signalling and interlocking devices, all service points on Belgrade Center – Novi Sad line section have been included in the central traffic control and command system – remote control type "FZt – CTC".

The main arterial routes Šid- Golubinci – (Stara Pazova) – (Belgrade Center)-Niš-Preševo and Belgrade Center- Vrbnica are included in the system of remote traffic control and command – remote control centre (manufactured by Westinghouse). There are three remote control centres - in Belgrade, Požega and Niš. Based on this device, 3 remote control centres were set-up in Belgrade, Niš and Požega with the total of 133 controlled stations.

Dimitrovgrad Station (railway line Niš-Dimitrovgrad-State Border) is equipped with electronic signalling & interlocking device Simis-W with Iltis control & supervision system manufactured by Siemens.

In addition to the above-mentioned, Pančevo Main St. and Ćuprija stations are equipped with electronic signalling & interlocking devices.

Other railway lines are equipped with other above stated interlocking types, but there is no continuity as regards to one system of interlocking.

The overview of signalling and interlocking devices is presented in Appendix 3.6.

2.3.11 Traffic Control Systems

The movement of trains running in opposite directions and consecutive train movements are controlled by requesting and giving the permission i.e. announcement of arrival and departure.

Consecutive trains can follow one another only in particular space intervals. For the control of trains following one another in particular space intervals, railway lines can be divided into:

- Block sections between stations when two neighbouring stations control the sequence of trains in the station interspace,
- Train-recording sections when two neighbouring train-recording points or a station and a neighbouring train-recording point control the sequence of trains in announcement intervals,
- Block sections when the traffic of consecutive trains is controlled by automatic positioning of automatic block signals in the position of permitted or forbidden train ride.



In addition to space distance, in case of consecutive trains in train reporting and block intervals, there should be a time interval so as to avoid train stopping before automatic block signals due to different train journey times over block sections (time spacing).

On the railway lines of "Infrastructure of Serbian Railways" JSC there are also interstation interlocking devices (MZ) which regulate train traffic at distances between stations, where an interstation track occupation is reported by means of axle counters.

There can only be one train in one block section on the same track and at the same time.

Train operation is regulated by movements inspectors who uses the station signal boxes and along railway lines through remote control – by the remote control dispatcher from the central signal box, except at the stations that are not included in the remote control system. The traffic of trains running in opposite directions and consecutive trains is regulated by movements inspectors at manned stations and along the railway lines included in the remote control system it is regulated by remote control dispatchers.

"Infrastructure of Serbian Railways" JSC uses "Flexi code 560" remote control system on its territory, manufactured by Westinghouse. It uses semiconductor technology and a code system, and controls instruction completeness at the stages of forwarding and acceptance. It was developed as a standard format and it consists of a remote control centre, which can control 32 stations on one railway line and of one or more lines for data transfer, as well as the remote control equipment at stations (satellites).

Based on this device, 3 remote control centres were constructed in Belgrade, Nis and Pozega, with 140 controlled stations.

On Belgrade Center – Novi Sad line section , all service points are included in the central traffic control and management system – remote control center type FZt-CTC.

The train control system is governed by the Traffic Regulations ("Official Gazette of RS" No 34/22 and 107/22) and Instructions on particular procedures in performing of traffic service on the territory of Infrastructure of Serbian Railways ("Official Gazette of Serbian Railways" No 43/22).

The train control methodology is presented in Appendix 6.

2.3.12 Communication Systems

In the course of traffic operations, communication is carried out via telecommunication devices – telephone and ground-train radio links. Communication via means that provide reliable and continuous registration of notifications (teleprinter, telephone or radio link with registration devices) is considered to be verifiable communication. The notifications related to the control of train movements (permissions and instructions given to train crew via telephone or ground-train radio links) are furnished exclusively via devices for verifiable communication

The communication between movements inspectors, remote control centre dispatchers and drivers is carried out in Serbian language.

All notifications are given in the format and manner set forth in the Traffic Regulations ("Official Gazette of RS" No 34/22 and 107/22), Instructions on particular procedures in performing of traffic service on the territory of Infrastructure of Serbian Railways ("Official Gazette of Serbian Railways" No 43/22) and Regulation on records kept by the railway undertaking and the railway infrastructure manager ("Official Gazette of the RS" no.56/19, 154/20 and 159/20).

The overview of telecommunication links and installations is presented in Appendix 3.7.

IŽS network uses analogue ground-train radio system (RDV) for transmission of specially coded voice information in the frequency range of 460 MHz and by using frequencies belonging to quadrifrequency



groups according to UIC Leaflet 751-3. The system operates in full duplex (modes A and B), with selective calling option including automatic identification and making special calls (group, intervention).

There is a possibility of integrating into local radio networks (mode C) and automatic telephone exchange. The devices were manufactured by AEG (now EADS telecom) in the '70s and the '90s.

On the lines with a dispatcher control system, the train operating staff is connected with the remote control centre dispatchers via mobile RDV units, which represent mandatory driver's cab equipment.

The GSM-R system enables voice communication and transmission of text messages within the ERTMS, i.e. for ETCS L2 and ETCS L3. The GSM-R system is installed on line section Belgrade Center – Novi Sad.

2.3.13 Train Control Systems

For the time being, there is no automatic train control system on the railway lines of "Infrastructure of Serbian Railways" JSC.

Intermittent transmission AS device (automatic train control) with resonant frequencies of 1000Hz and 2000Hz, type Indusi (I 60), is used for the control of train movements. It is comprised of:

- track magnet (stationary trackside part of the device)
- transmission system (inductive link between the track magnet and locomotive auto-stop device), and
- locomotive part installed on the traction unit.

Track magnets are installed on the right-hand side of the track, in the direction of train movement.

Functioning and operating of AS devices have been stipulated under the Operator's Manual for inductive I-60 AS devices (Instructions No 425), Instructions for installation, testing and putting into operation and maintenance of the locomotive part of I-60 AS device (Instructions No 426), and Instructions for use, installation, testing and maintenance of trackside AS devices on the lines of Yugoslav Railways (Instructions No 427).

The overview of the lines equipped with AS device is presented in Appendix 3.6.

The ERTMS is the European Rail Traffic Management System. The ETCS is a part of ERTMS. On Belgrade Center – Petrovaradin line section the ETCS L2 is installed.

2.4 Traffic Restrictions

2.4.1 Specialised Infrastructure

According to Article 40 of the Law on Railways ("Official Gazette of RS" No 41/18 and 62/23), if there are appropriate alternative routes, the Infrastructure Manager may, upon consulting interested parties, designate the specialised infrastructure for particular types of traffic.

In case that a specialized infrastructure is designated, the Infrastructure Manager may, when allocating the infrastructure capacity, give priority to such type of traffic, however prioritizing may not be in collision with the competition protection rules. Designating of specialized infrastructure will not exclude the use of such infrastructure for other types of traffic when capacities are available.

There is no specialised infrastructure on the network operated by IŽS in the above sense.

2.4.2 Environmental Restrictions

Environmental restrictions, such as noise levels, are not currently applied on the network managed by IŽS.



2.4.3 Dangerous Goods

The transport of dangerous goods on the railway infrastructure operated by IŽS is regulated by international and national regulations in the field of transport of dangerous goods in accordance with 3.4.4 - Dangerous Goods.

On the Niš – Dimitrovgrad – State Border – (Dragoman) railway line, the transport of tank wagons carrying ammonia is prohibited.

Locations for loading, unloading, transshipment of dangerous goods may be performed only in places that meet prescribed requirements. The stations (service points open to the acceptance and forwarding of goods) within the rail infrastructure do not meet this requirement, wherefore handling of dangerous goods in the station areas (service points) is not allowed.

Handling of certain types of dangerous goods () can be performed on special tracks under special conditions, i.e. on particular parts of the tracks in particular stations. The list of service points in which transshipment of dangerous goods can be performed is given in Appendix 3.8.

For further details, please contact IŽS:

"Infrastructure of Serbian Railways"
Traffic Department
Central Operational Department
Main Dispatcher for Transport of Dangerous Goods
6 Nemanjina St
11000 Belgrade
Serbia

Tel.: +381 11 3619 288 e-mail: <u>rid1@srbrail.rs</u>.

2.4.4 Tunnel Restrictions

On the railway line Belgrade Centre –Pančevo Main St. - Vršac- State border, through the "Vračar" tunnel i.e. on the section junction Karađorđev park – junction and Pančevo Most stop and through the "connecting" ("vezni") tunnel i.e. on the route Karađorđev park junction - Dedinje junction, the trains with diesel traction vehicles, DMUs, diesel motor track vehicles, as well as vehicles with their own diesel generator set (power supply wagon, reefers with generator set station) cannot be regularly dispatched. Exceptions to this are DMUs series 711 and relief (auxiliary) trains with diesel traction of the infrastructure manager which are urgently dispatched to the accident/incident locations and diesel motor track vehicles used for urgent elimination of obstacles disrupting the traffic, while respecting the limitations that interval of sequence and the time between meeting of any two vehicles with diesel drive cannot be shorter than 30 minutes.

In other cases, the diesel motor vehicles of the infrastructure manager can run on the specified sections when the transport of trains for transport of passengers is not organized in the service point Vukov spomenik.

Along with the obligation to respect the restrictions regarding the vehicle drive, for the transport of freight trains containing wagons with a RID marking (loaded or empty vehicles for transport of dangerous goods), the following conditions apply:

- on the part of railway line Pančevo Most-Rakovica and Pančevo Most Belgrade Centre, trains can operate only in the period when traffic of passenger trains is not organized i.e. when the station is closed for passenger transport,
- on the part of railway line Pančevo Most –Rakovica and Pančevo Most Belgrade Centre, there can be only one train with RID marked wagons i.e. meeting of two freight trains if at least one is composed of RID marked wagons is not permitted;



- during the operation of trains composed of RID marked wagons, an additional technical inspection must be carried out, which includes checking of bearing temperature and enhanced visual control of loads (valve, clamps etc.) for the train which operaters in direction Pančevo Most Rakovica and Pančevo Most Belgrade Centre in Pančevo Main St., and for the trains operating in direction Rakovica –Pančevo Most either in Rakovica station or in Belgrade Marshalling Yard (if it is performed in Belgrade Marshalling Yard, there is no need for the inspection to be performed in Rakovica station);
- obligation of railway undertaking upon performed additional technical inspection of a train in stations Pančevo Main St., Rakovica and Belgrade Marshalling Yard, is to register a clause in the telegraph-telephone log "The additional technical inspection of train No _____ was performed on date __at ___ hours (signature of authorized representative of railway undertaking)", thereby to inform the train dispatcher in a proved way that technical inspection of train was completed before dispatching it on the part of railway line Pančevo Most-Rakovica. In the event that railway undertaking does not have an organized inspection service in stations Pančevo Main St., Rakovica and Belgrade Marshalling Yard, and that technical inspection of trains composed of loaded or empty RID marked wagons has not been performed, such train cannot operate on the part of railway line Pančevo Most -Rakovica.

Freight trains, which have loaded or empty RID marked wagons, must in no case operate in the direction Belgrade Center - Pančevo Most.

2.4.5 Bridge Restrictions

There are no bridge restrictions in terms of specifically defined requirements apart from those arising from the bridge structural parameters. Exceptionally, until the construction of the fifth longitudinal bridge girder into the construction of "Pančevo Most" across Danube river, on the railway line Belgrade Centre – Pančevo Main St. – Vršac – State Border, between location on junction Pančevo Most—Krnjača Most all assemblies of two freight trains are prohibited on "Pančevo Most".

2.4.6 Maximum Train Weight Restrictions

The maximum train weight for the trains running on the Niš – Dimitrovgrad – State Border – (Dragoman) is restricted to 1200 tonnes.

2.4.7 Train Traction Restrictions

On the Stara Pazova – Novi Sad line section, trains with diesel traction must not be dispatched. The exception from this rule are the trains of railway undertakings performing construction, reconstruction or maintenance of railway infrastructure. In case of trains that, in addition to the train locomotive, also contain the additional work locomotives, i.e. double heading locomotives, such locomotives must run within the train composition along the entire Batajnica – Novi Sad line section.

2.4.8 Train Speed Restrictions

On the Batajnica – Novi Sad line section, the speed of freight trains is 90 km/h. The exception from this rule are the trains of railway undertakings performing construction, reconstruction or maintenance of railway infrastructure.

2.5 Availability of the Infrastructure

All railway lines operated by IŽS are open to railway traffic from 0.00 h to 24.00, except for the lines on which the traffic due to technical condition is temporary impossible/ or with the Decision of the Government of the Republic of Serbia the consent for the suspension of public transport of passengers and goods on the part on the railway infrastructure was given ("Official Gazette of the RS"no.80/2016), and they are listed in Appendix 6. Service points are open for railway traffic permanently, as some of them may have limited operating hours envisaged for the effective staff of the traffic service, as stated in Appendix 6. Details about mentioned working time are published in the timetable material, and for more datils please contact:



"Infrastructure of Serbian Railways" JSC Traffic Department 6 Nemanjina Street, 11 000 Belgrade, Serbia Tel/Fax: +381 11 3618 214

E mail: sektor.sp@infrazs.

Exceptionally, on the railway lines with limited hours of operation where mentioned staff is working in limited operating hours, train operations can take place outside the mentioned hours when trains have to operate via auxiliary routes due to the occurrence of an accident or incident. Appendix 3.9 contains an overview of auxiliary routes that may be used as alternative to regular ones. Certain lines that may be used as auxiliary routes can be of different class from the line class along the regular routes with respect to permitted loads per axle or m'.

A railway operator may also submit a request for train path allocation outside the operating hours of the line or railway service points, in which case such railway operator has to bear all the costs of entire traffic organization for longer operating hours of the line, i.e. service points.

If several railway operators are using longer operating hours, they will jointly bear the costs.

Infrastructure Manager is responsible for maintenance, overhaul and modernization of the infrastructure in order to provide appropriate service and safe performance of transport operations. In this respect, IŽS plans regular maintenance of the lines that affect the availability of infrastructure, in the sense of closure of specific line sections for a specific time period or introduction of temporary train speed restrictions.

The infrastructure use restrictions required for regular infrastructure maintenance are part of the capacity allocation process and are published within the timetable documents, in the timetable booklets (KRVs).

IŽS will issue for all railway operators a 3-months' prior notice of any planned longer works to be performed on the railway infrastructure and which could affect the transport operations and the timetable due to the speed restrictions, route changes, use of buses instead of trains for the carriage of passengers, etc.

For all freight trains running in the South-North and transit the part of railway infrastructure between station Velika Plana and node Belgrade, regular routing is across the railway line (Belgrade)-Rakovica-Jajinci-M. Krsna-V. Plana and the compiling of paths in done in this way. Exceptionally this rule cannot be applied during the planned works on reconstruction of above-mentioned railway line.

For all freight trains running in the south-north and transit the part of railway infrastructure between node Belgrade and station Velika Plana, regularly routing is across the railway line (Belgrade)-Resnik-Mladenovac-V. Plana and the compiling of paths in done in this way.

The railway lines on the territory of Kosovo and Metohija are under interim supervision of UNMIK, according to the Temporary Agreement between ZTP Beograd and UNMIK Railways of 31/05/2002 (ref. number 300/2002 - 153 of 31/05/2002), wherefore the path allocation requests for this territory will not be taken into consideration.

2.6 Infrastructure Development

Railway infrastructure, which is managed by IŽS, is constantly being renewed and modernized, in order to enable to the users the best possible service quality.

Development projects of the infrastructure are defined within Strategic plan of IŽS (Decision of the Assembly of Joint stock company for public railway infrastructure management "Infrastructure of Serbian Railways" JSC, Belgrade no. 5/2017-116-49 from June 29, 2017)", which is prepared on the base of the National program of the infrastructure ("The Official Gazette of RS", no. 53/17). Development of the railway infrastructure is directed towards the modernization of the lines which are part of the Pan-European corridor.



Possibility of the realization of the planned works depend upon the amount of the financial means, which are provided from the state budget of the Republic of Serbia and from the amount provided from the other sources of financing.

Appendix 3.11. contains a list of development projects.



3. ACCESS CONDITIONS

3.1 Introduction

This chapter of the Network Statement describes the conditions associated with access to the railway infrastructure managed by the IŽS. These conditions also apply to the part of freight corridors passing through the railway infrastructure managed by the IŽS.

3.2 General Access Requirements

A railway undertaking can provide transport services on IŽS railway infrastructure based on:

- valid license for carriage in railway transport over the infrastructure, issued by Directorate for Railways (hereinafter: DR),
- valid certificate on safety for carriage in railway transport,
- allocated capacity path and contract on provision of access to and use of public railway infrastructure concluded with the infrastructure manager.

Requirements for the submission of application for license, safety certificate and thereof contents are stipulated in the Law on Railways ("Official Gazette of RS" No 41/18 and 62/23), Law on Safety in Railway Traffic ("Official Gazette of RS" No 41/18), Rules on transport licenses in railway traffic ("Official Gazette of RS" No 53/19), Rules on joint safety methods for evaluation of compliance with the requirements for obtaining of safety certificates and safety management system elements ("Official Gazette of RS" No 32/21) and Rules on transport safety certificate forms ("Official Gazette of RS" No 63/19).

3.2.1 Conditions for Applying for Capacity

Request for train path allocation can be submitted by a railway undertaking or an international group of railway undertakings or other persons or legal entities, such as competent authorities, consignors and forwarding agents and operators in combined transport, having interest in provision of public service or having commercial interest in the allocation of railway infrastructure capacity.

Where a train path is allocated to an applicant other than a railway undertaking, the contract on the use of railway infrastructure shall be concluded between the infrastructure manager and the railway undertaking hired by such applicant.

If a request has been submitted after a specified deadline, train path in accordance with remaining capacities will be offered to the applicant, and if there are no capacity constraints, a new path will be subsequently created.

3.2.2 Conditions for Access to the Railway Infrastructure

Services of carriage in railway transport may be provided by a company, other legal entity or entrepreneur registered for provision of public transport services or transport for own purposes, incorporated in the Republic of Serbia, subject to the submission of evidence of fulfilment of the conditions related to good reputation, financial capability, and competence, and the cover for civil liability.

The license for carriage in railway transport and the certificate on safety is issued by DR or a competent authority of another country, based on reciprocity, with which country Serbia has signed an intergovernmental agreement on mutual recognition of certification.

Transport on railway infrastructure may be performed by railway undertakings meeting the requirements referred to in paragraph 1 hereof, who signed the Contract for use of public railway infrastructure. The Contract for use of public railway infrastructure regulates the mutual rights and obligations between the infrastructure manager and railway undertakings and they are concluded in line with article 19 of the Law on Railways.



3.2.3 Licenses

Directorate for railways issue transport license: for transport of goods/passengers and for transport for own purposes.

Transport License is issued to applicant, company, other legal entity whose main registered activity is for provision of railway transport of good and/or passengers, or to a company or other legal entity who performs or will perform transport for own purposes, incorporated in the Republic of Serbia, subject to the submission of evidence of fulfilment of the conditions related to:

- a) good reputation,
- b) financial capability,
- c) proficiency and
- d) cover for civil liability in line with the Law on Railways.

Details related to licensing of railway undertakings are set from article 81.to article 85. of the Law on Railways.

Contact of competent institution for issuance of license is:

Directorate for Railways 6 Nemanina St., 11000 Belgrade The Republic of Serbia Manager's Office tel. (011) 361 68 66 fax (011) 361 83 46 e-mail: kontakt@raildir.gov.rs

web page: www.raildir.gov.rs

3.2.4 Safety Certificate

The railway undertaking must have safety certificate for transport to be allowed to access infrastructure. The type and scope of operations of railway undertaking related to certificate are specified in the safety certificate.

The safety certificate may include the entire network or certain part thereof.

Safety certificate is consisting of:

- 1) part A confirming the acceptance of railway security management system of railway undertaking;
- 2) part B confirming the acceptance of provisions adopted by railway undertaking in order to meet the specific requirement set for transport safety on appropriate network; these requirement may include the application of technical specification, the national safety regulation and internal regulation of railway undertaking, the acceptance of employee's certificates and permissions for usage of rolling stock used by that railway undertaking.

Directorate for Railways is responsible for issuance of safety certificate for transport in set form and in the form of decision. The decision to issue or to refuse to issue safety certificate for transport is ultimately in the administrative procedure and a dispute can be brought against it at Administrative Court.

The validity period of the safety certificate for transport is five years and can be renewed at the request of the holder.

Directorate for Railways determine in more detail forms of safety certificate for transport, numbering of forms of safety certificate for transport in line with European identification number, the application form for



issuance of safety certificate for transport and instructions for its completion, as well as necessary documentation enclosed with the request for issuance of safety certificate for transport.

Provisions regarding safety certificate for transport are set in Law on Railway Transport Safety.

Contact of competent institution for issuing safety certificate is:

Directorate for Railways 6 Nemanjina St., 11000 Belgrade The Republic of Serbian Manager's Office tel. (011) 361 68 66 fax (011) 361 83 46

e-mail: kontakt@raildir.gov.rs

web page: www.raildir.gov.rs

3.2.5 Coverage for Civil Liability (Insurance)

One of the conditions for issuing a transport license is the fulfillment of the requirements related to civil liability coverage (Insurance).

The requirement relating to civil liability coverage for a company or other legal entity that is registered for the public transport of goods and / or passengers, or performs or will carry out transport for its own purposes, is fulfilled if it is adequately insured or has adequate guarantees under market conditions for coverage, in accordance with legal requirements and confirmed international treaties, for their liability in the event of an accident.

Civil liability coverage may not be required to take effect before the railway undertaking starts operating the service.

3.3 Contractual Arrangements

3.3.1 Framework Agreement

The Infrastructure Manager and an applicant may, by way of exception, draw up a framework agreement on the use of capacity on the relevant railway infrastructure for a period longer than the period of validity of the timetable.

The Framework Agreement between the infrastructure manager and the applicant shall contain the characteristics of the infrastructure capacity for which the applicant applied and which he was offered for a time period exceeding the period of validity of one timetable.

The Regulation on the Manner of Conclusion and Content of Framework Agreements for Allocation of Railway Infrastructure Capacity lays down the procedures, content and criteria relating to the framework agreements for the allocation of railway infrastructure capacity, as well as the obligations of the infrastructure manager regarding information regarding the framework capacity.

At present, the infrastructure manager does not offer the possibility of concluding a framework agreement with the applicant. However, it intensively conducts the activities aimed at defining the procedures so as to have this option open in the near future.

3.3.2 Contracts with RUs

The Law on Railway of the Republic of Serbia stipulates the obligation of concluding a contract on the use of infrastructure that allows railway undertakings to use railway infrastructure. Contracts for use of public



railway infrastructure regulate in more detail the mutual rights and obligations of infrastructure managers and railway undertakings related to guaranteeing the technical and other conditions for safe transport operation, the application of regulations governing the transport of dangerous goods, as well as payment of access charges and charges of services. Contracts for use of public railway infrastructure are concluded under non-discriminatory and transparent conditions.

Contracts on the use of infrastructure are concluded no later than 1 (one) month prior new timetable enter into force or immediately after the allocation of ad hoc train path.

If during the validity period of Contract for use of public railway infrastructure, the railway undertaking through an authorized person submit ad hoc request in approved way for allocation of train path, it is considered that addendum of that contract is concluded at the moment of allocation of requested train path by infrastructure manager.

For other services (basic, additional and accompanying) provided by infrastructure manager special contracts are concluded.

3.4 Specific Access Requirements

3.4.1 Rolling Stock Acceptance

Railway undertaking may use only the rolling stock that complies with the technical regulations and standards. Rolling stock shall, by virtue of their structure and technical condition, ensure safety of transport on the infrastructure, safety of transported persons and goods, safety of staff, and shall meet the health and environment protection requirements.

All requirements relating to rolling stock and thereof use on the railway infrastructure of IŽS are set forth in the Law on Railway Safety and Interoperability ("Official Gazette of the RS", no. 41/18) and Law on Railway Traffic Safety ("Official Gazette of the RS",no.41/18). Railway undertaking shall be responsible for the technical condition, maintenance and operation of the rolling stock.

3.4.2 Staff Acceptance

Railway undertaking shall be responsible for ensuring that his staff meets the requirements stipulated by the Law on Railway Safety ("Official Gazette of the RS", No. 41/8) and applicable by-laws.

The railway undertaking's train manning shall be familiar with the official language in the Republic of

Railway undertaking shall be responsible for staff training, validity of periodical knowledge tests, knowledge of track condition and local conditions at stations/stops. Railway undertaking is obliged in that respect to abide by the applicable legislation of the Republic of Serbia.

3.4.3 Exceptional Transport

A load shall be considered special if due to its external dimensions, weight or properties, and with respect to the station installations or wagons in transport by one of the railways participating in transport, it causes particular difficulties, wherefore it is received for transport only under special technical or operating conditions. Carriage of special loads in domestic and international railway transport, as well as the conditions under which such carriage may take place, shall be approved by the Infrastructure Manager whose railway infrastructure will be used for transport. IŽS provides the special loads service (for vehicles or goods) in accordance with the provisions on transport of special loads set forth in the Rules on Transport of Special Loads ("Official Gazette of the RS", no. 6/17).

IŽS shall be responsible for the allocation of capacity and defining the conditions for transport of special loads.



In addition to what was stated above, the railway undertaking in international transport shall comply with the provisions of UIC 502.1 and 502.2, governing the process of approval of requests for transport of special loads. The railway undertaking shall submit a request for transport of loads to the relevant department of IŽS. Special loads will be accepted for transport only if special operating and technical conditions are met. For more details on transport of special loads please refer to Chapters 4 and 5 of this Network Statement.

For more details on transport of special loads please contact:

Infrastructure of Serbian Railways"JSC Traffic Department 6 Nemanjina Street 11000 Belgrade Serbia

Tel.: +381 11 3618 214 Fax: +381 11 36<u>16 814</u> sektor.sp@srbrail.rs

3.4.4 Transport of Dangerous Goods

Transport of dangerous goods by rail in the Republic of Serbia shall be performed in accordance with: Annex C to Convention concerning international carriage by rail (-COTIF) - Regulations governing the international carriage of dangerous goods by rail (RID); the Law on the Transport of Dangerous Goods; the by-laws based on LTDG and other regulations in the Republic of Serbia.

The Ministry of Construction, Transport and Infrastructure is responsible for performance of administrative, inspection, technical and other expert activities in the field of transport of dangerous goods in the Republic of Serbia(www.utot.gov.rs).



4. CAPACITY ALLOCATION

4.1 Introduction

Pursuant to the Law on Railways and Decision of the Government of the Republic of Serbia on incorporation of Joint Stock Company for Public Railway Infrastructure Management and the Company's Articles of Incorporation, "Infrastructure of Serbian Railways" JSC performs the activities of public railway infrastructure management and is responsible for allocation of infrastructure capacities for the purposes of international and domestic transport in a transparent and non-discriminatory manner, provided that all legal provisions on the conditions for access and use of railway infrastructure set out in Chapter 3 of this Network Statement have been previously fulfilled.

4.2. Description of infrastructure capacity allocation procedure

The Infrastructure Manager normally allocates the train paths once a year, upon reconciling the train path allocation requests in the timetabling process, not exceeding the Timetable validity period.

Allocation of infrastructure capacities in the form of a train path is carried out in accordance with the procedures specified in this document for:

- infrastructure capacities allocation procedure for the new Timetable,
- infrastructure capacities allocation procedure during Timetable validity period (including train path allocation on ad hoc request).

A Railway Undertaking may not assign the allocated train path to another Railway Undertaking. Train path trading is prohibited. Train path user will pay a charge for the use of railway infrastructure and for railway traffic organization and control.

The Government of the Republic of Serbia sets out the Methodology for valuation of elements for determining the charges for the use of railway infrastructure. The Decree on methodology for valuation of elements for determining the charges for the use of railway infrastructure is published in the "Official Gazette" of RS" No 122/14. For additional services, a train path user will pay a charge in accordance with the Infrastructure Manager's formal decision.

How to apply?

Request for infrastructure capacity allocation can be submitted by railway undertakings using the train path request form, which is available in Appendix 4.1, and published on IŽS we<u>bsite: www.</u>infrazs.rs.

Requests are submitted according to procedures defined under section 4.5.

The request should contain the following data:

- Full registered name of the Railway Undertaking (TIN, company identification number),
- Train type (for passenger transport, freight, empty, locomotive, and similar),
- The desired time of train departure from the departure station and the time of train arrival to the terminal station.
- Traffic route and transport route,
- Necessary stops with minimum lengths of delays,
- Traffic period and days (traffic calendar),
- Series and number of wagons/series and number of train units,
- Train length and mass (length in meters, mass in tons),
- Type and serial number of the traction vehicle (traction passport),
- Additional locomotives (type and serial number) and on which section,



- Maximum train speed,
- Braking type,
- Special notes, such as vehicle shunting, change in train composition, implementation of connections, crew change, type of intermodal transport unit, type of dangerous goods (UN number, number for marking of danger or, for Class 1 dangerous goods, the subclass and compatibility group for substances and items, NHM code with minimum 6 digits and the name of dangerous goods based on RID), exceptional consignments, handover procedures on border crossings, technical hold ups (inspection, water supply, removing of waste and similar) and the required time period, the need for additional track capacities (storing, preheating/cooling, train formation and similar), the need for access to other facilities for provision of additional services and similar.

Upon the request of IŽS, a Railway Undertaking will be required to provide all the missing data within five working days, otherwise the request for capacity allocation will not be considered as submitted.

A request for capacity allocation submitted to IŽS on time and containing all the necessary elements makes a basis for timetabling and train path allocation. If a Railway Undertaking changes the request completely or partially after the determined deadlines for request submission it assumes the risk of not having the request granted.

After the annual timetable drafting process has been completed, the remaining available capacities will be allocated according to the deadlines defined in Appendix 4.3 according to the sequence of request submission.

Manner of capacity allocation

IŽS decides on capacity allocation taking into account all legally valid requests and legal provisions in force. In accordance with the Law on Railways, the procedures and deadlines in capacity allocation have been determined under point 4.5 of the present Network Statement.

Defining of procedures and deadlines in capacity allocation is harmonized with Directive 2012/34/EU and its appendices, as well as the RNE recommendations from "Procedures for International Path Requests".

Relevant bodies involved in the capacity allocation process and their responsibility

Bodies participating in capacity allocation process:

- IŽS "Infrastructure of Serbian Railways" JSC as Infrastructure Manager and capacity allocation body
- Railway Undertakings railway undertakings submitting capacity allocation requests
- RNE RailNetEurope body coordinating the allocation of international train paths and determining processes and deadlines for submission of international train path requests
- FTE ForumTrainEurope European organization of railway undertakings representing the European Forum for technical planning of international passenger and freight transport.

IŽS, as Infrastructure Manager and capacity allocation body, is a member of RNE and is actively involved in the activities of FTE.

4.3 Allocation of capacity for maintenance, including the allocation process

Allocation of infrastructure capacities for maintenance, renewal and modernization of railway infrastructure is an integral part of capacity allocation process. Aiming at maintaining a certain level of quality, safety and reliability of railway infrastructure, IŽS — Department for access to railway infrastructure will, during the timetabling process, reserve a part of infrastructure capacities for scheduled railway infrastructure maintenance, for specific time periods and specific line sections.

Periods reserved for scheduled railway infrastructure maintenance are published in the Timetable Booklet.



4.4. Impact of Framework Agreements

"Infrastructure of Serbian Railways" is currently not concluding framework agreements with interested applicants for allocation of infrastructure capacities.

4.5 Schedule for Path Requests and Allocation Process

Each year IŽS prepares a schedule for path request submission and capacity allocation which is applied in the annual timetabling process and in the capacity allocation process outside the annual timetabling process published in the Network Statement.

Railway Undertakings allocation requests for the new Timetable and during Timetable validity period should be submitted in the form defined in Appendix 4.1, to the following address:

By mail, to the following address:
"Infrastructure of Serbian Railways" JSC
Department for access to railway infrastructure
6, Nemanjina St
11000 Belgrade, Serbia
By e-mail: sektor.pzi@srbrail.rs

4.5.1 Schedule of requests submission for new annual timetabling process

The Applicant submits a request for capacity allocation not earlier than 12 months and not later than 10 months before the new Timetable enters into force. Deadlines for requests submission regarding Timetable 2023/2024 which enters into force on December 10th,2023 with validity until December 14th 2024 are presented in Appendix 4.3.

For the needs of Railway Undertakings wishing to use additional capacities or to change parametres of already allocated train paths, the new capacity allocation during Timetable validity period is enabled by:

- Regular amendments of and supplements to the Timetable
- Special amendments of and supplements to the Timetable
- Train path allocation on ad hoc request

In the form defined by Articles 4.5.2 and 4.5.3 in this Network Statement.

4.5.2 Schedule of requests submission for train path allocation during annual Timetable validity period through regular and special amendments of and supplements to the Timetable

During the Timetable validity period, there are regular amendments of and supplements to the Timetable 5 times a year, in accordance with internationally determined terms which are presented in Appendix 4.4. Deadlines for submission of requests for capacity allocation are presented in the column 1, Appendix 4.4.

Requests for regular amendments of and supplements to the Timetable that are submitted after deadlines specified in the column 1, Appendix 4.4, will be considered as special requests and shall be included in regular amendments of and supplements to only in case of existence of available infrastructure capacities and technical possibilities for their processing.

After the 5th regular amendments of and supplements to the 2023/2024 Timetable enter into force it will be only possible to submit ad hoc requests for capacity allocation.

Besides regular amendments of and supplements to the Timetable in accordance to the terms specified in the column 3, Appendix 4.4, Railway Undertakings may submit special request for infrastructure capacity allocation outside specified terms. If there is possibility for allocation of the requested capacities, consequent changes in the Timetable shall be considered as special amendments of and supplements to the Timetable.



4.5.3 Allocation of capacities during annual Timetable validity period on ad hoc request

Ad hoc requests for infrastructure capacity allocation are requests for allocation of single train path, which are submitted during annual Timetable validity period.

Infrastructure Manager is obliged to respond to ad hoc requests as soon as possible and not later than five working days upon receiving the request.

4.5.4 Path Allocation and Coordination Process

IŽS will allocate the infrastructure capacity if the applicant fulfils the conditions for capacity allocation set out in the Network Statement and if the infrastructure capacity allows such allocation. IŽS will act in such a manner so as not to favour any applicant.

The following criteria will be applied in the path allocation process:

- Volume of service;
- Utilization of railway infrastructure;
- Volume of additional services provided by the IM in connection with the transport provided on the path;
- Business reputation;
- Public service obligation; and
- Quality of performed transport service in the previous period.

After the final deadline for submission of requests for the annual timetabling has expired, IŽS will initiate the capacity allocation process in a transparent and non-discriminatory manner.

Requests for capacity allocation received after the annual timetable drafting cannot affect draft alteration, except with the consent of the Railway Undertaking to whom the capacity has been originally allocated.

Allocated capacity can be used upon conclusion of Access Contract between IŽS and the Railway Undertaking submitting a request for capacity allocation.

Allocated capacity cannot be transferred onto another Railway Undertaking in accordance with the Law on Railways.

Coordination process

Every year at the beginning of the new annual timetabling process, IŽS will conduct consultations with railway undertakings on their plans for the timetable which will come into force in not less than 11 months (x-11). In the course of these consultations, IŽS will inform railway undertakings on major maintenance works, overhaul and modernization of railway infrastructure.

The coordination process is run by IŽS – Department for access to railway infrastructure, which is preparing and publishing the annual Timetable and preparing of all required working materials.

Upon the expiry of the final deadline for submission of requests for capacity allocation for the annual Timetable, IŽS – Department for access to railway infrastructure will start the coordination process, together with railway undertakings for the purposes of solving conflicting requests and their better harmonization, aiming to fulfil the needs of users as much as possible in a non-discriminatory and transparent way.

Timetable planning includes reviewing all received requests, including all restrictions imposed by IŽS and the scheduled infrastructure maintenance plans.

If the number of requests for allocation of the same infrastructure capacity exceeds the permitted capacity of the particular railway line, IŽS apply priority rules from 4.6.



Following the completion of the coordination procedure, IŽS will deliver the draft timetable to railway undertakings. Together with railway undertakings IŽS will perform the final consultations concerning the draft timetable. Railway undertakings must state, in written form, whether they accept, partially or completely, that is, do not accept, the Timetable.

Deadline for making the statement is one month from the day of the draft submission, at the latest.

After the expiry of the deadline for making the statement, IŽS will define the Timetable according to the requests submitted on time and it will be deemed that the train paths have been allocated.

IŽS will subsequently allocate the remaining available capacities according to requests received after the final deadline, in the order of their receipt.

4.5.5 Dispute Resolution Process

IŽS will initiate the dispute resolution process upon delivery of written complaints by railway undertakings, relating to complete or partial acceptance/non-acceptance of the proposed Timetable.

Complaints are to be addressed to IŽS:

- By mail, to the following address:
 "Infrastructure of Serbian Railways" JSC
 Department for access to railway infrastructure
 6, Nemanjina St
- 11000 Belgrade, Serbia
- By e-mail: sektor.pzi@srbrail.rs

IŽS will evaluate all complaints and objections and conduct consultations with railway undertakings aiming to fulfil their requests.

If a mutual solution is not found, IŽS will determine the capacity and inform the railway undertakings of this. If after the request coordination it is still not possible to satisfy all the requests for capacity allocation, IŽS will be obliged to announce that the said line section is congested.

Railway undertakings can appeal to the Directorate for Railways with respect to IŽS decision.

A potential appeal of a Railway Undertaking cannot be the reason to delay the process of Timetable adoption and coming into force.

4.6 Congested Infrastructure

If in the coordination process IŽS is unable to adequately satisfy all railway undertaking requests due to capacity limitations, IŽS will declare the requested infrastructure capacity to be "congested".

In cases when IŽS declares infrastructure "congested", it will conduct an analysis of capacities on congested infrastructure and define limitations due to which it was not possible to satisfy capacity allocation requests as well as propose a plan to enhance the particular capacity.

Infrastructure capacity will not be considered congested if the infrastructure capacity cannot be allocated due to the execution of works on the infrastructure maintenance, modernization, construction and reconstruction.

If the number of requests for allocation of the same infrastructure capacity exceeds the permitted capacity of a specific railway line, and if congested infrastructure is declared regarding that line, i.e. the part of that line, IŽS will, in an effort to allocate the train paths, apply priority rules according to the following order:

- 1) BG: VOZ
- 2) passenger trains in international traffic



- 3) passenger trains in domestic traffic
- 4) international freight trains
- 5) other freight trains

Considering the above mentioned priorities, the train path allocation process will be carried out according to the following rules:

- Requests for train paths of regular trains have the priority over the requests for train paths of special trains and trains transporting exceptional consignments;
- Requests for train paths according to framework agreements have the priority over new requests;
- Requests for train paths for a longer time period of service have the priority over requests for train paths for a shorter time period;
- Requests for train paths for a longer route have the priority over train paths for a shorter route.

If a Railway Undertaking considers that its rights were withheld, it can appeal to the Directorate for Railways.

4.7. Exceptional Transports and Dangerous Goods

Exceptional Transports

Transport of exceptional consignments is transport in the course of which there is a deviation from at least one technical standard applied on the given infrastructure, such as for example, axle load, railway vehicle gauge, loading gauge and similar. Taking into account all the elements required for the transport of an exceptional consignment, IŽS will decide whether the requested infrastructure capacity will be allocated and under what conditions.

Deadline for submission of request for transport of exceptional consignments is not later than 20 days in domestic and 30 days in international traffic prior to service provision. Decision on the request for transport of exceptional consignments shall be made as soon as possible and not later than 15 days upon submission of the request.

Detailed information can be obtained at the below address. Deadline for capacity allocation will be as soon as possible. IŽS will decide whether it is possible to accept a certain transport and under which conditions.

Requests are submitted to:

"Infrastructure of Serbian Railways" JSC Traffic Department 6, Nemanjina St 11000 Belgrade, Serbia Tel.: +381 11 3618 214

Fax: +381 11 3618 214 Fax: +381 11 3616 814 E-mail: sektor.sp@srbrail.rs

In their request for capacity allocation, railway undertakings are required to list all the necessary information on the exceptional consignment which is being transported, regardless of whether it is a capacity allocation process for the annual Timetable or an ad hoc capacity allocation.

Dangerous Goods Transport

Dangerous goods transport on railway infrastructure operated by IŽS is regulated by international and national regulations in the field of dangerous goods transport, in accordance with point 3.4.4 of the Network Statement.



Based on clauses 1.4.2.2.5 and 1.4.3.6 of *RID* and Article 23, para 4, item 2) and Article 29 para 2 of the Law on Transport of Dangerous Goods, a Railway Undertaking is obliged to report every consignment of dangerous goods to railway Infrastructure Manager.

Reporting of dangerous goods transport can be done by phone: +381 11 3618 288 and in writing to the below address. The below address can be also used for more detailed information:

"Infrastructure of Serbian Railways" JSC 6, Nemanjina St, 11000 Belgrade Central Operations Unit Main dispatcher for dangerous goods transport Tel.: +381 11 3618 288

E-mail: rid1@srbrail.rs; glavni.riddisp@srbrail.rs

For the purposes of safe transport of dangerous goods on IŽS network, a Railway Undertaking is obliged to:

- Report each transport of dangerous goods consignment in real time i.e. immediately before the commencement of transport or at acceptance from the successive carrier.
- Report completion of transport of dangerous goods consignment in real time i.e. at the moment of completion of transport after the completed handover of consignment to the consignee at the destination station or upon handover of consignment to successive carrier.

Railway Undertakings are responsible for obtaining appropriate consents regarding the safety of dangerous goods transport.

Pursuant to clauses 1.4.2.3.1 of *RID* and Article 24 para 2 item 1) of the Law on Transport of Dangerous Goods, the consignee of dangerous goods in railway transport is obliged not to postpone the acceptance of dangerous goods consignment which is resulting in the railway undertaking's obligation not to postpone the handover of dangerous goods consignment after having performed the transport service.

Railway Undertaking is obliged to, after having accepted the dangerous goods consignment for transport at the forwarding station, immediately start the process of transporting the said consignment without any additional delays at the station, except for traffic reasons, accident or incident etc. Phased collecting of wagons loaded with dangerous goods (and non-cleaned empty wagons which were previously loaded with dangerous goods) in the forwarding station for the purposes of subsequent dispatching is prohibited due to the safety in transport of dangerous goods. The process of transport of dangerous goods (acceptance of consignment for transport from the consignor, dispatching, transport and handover of consignment to the consignee) must be performed in accordance with the technologically specified time in order to avoid the potential safety risks in transport.

After the customs clearing of consignment, it is exceptionally permitted for the consignment to remain on station sidings but only for a time period which is necessary to organize the dispatching and continuing of planned transport route, or handover to the consignee in accordance with the specified technological process for station operation i.e. Station Regulations, Part II.

Obligation to announce the transport of dangerous goods Class 1 and Class 7

Exceptionally in transport of dangerous goods Class 1 and Class 7, a Railway Undertaking is obliged to submit to the Infrastructure Manager, in writing (Central Operational Unit – Main dispatcher for transport of dangerous goods) an announcement for the said transport in the time period which is not less than 24 hours prior to the moment of acceptance for transport (entry onto IŽS network). Railway Undertaking may send the announcement of transport also in the form of an email with scanned documents to the following address: rid1@srbrail.rs.

The announcement should contain the following data and attachments:

- 1. Consignor
- 2. Forwarding station and country



- 3. Consignee
- 4. Destination station and country
- 5. Entry border station
- 6. Exit border station
- 7. Net quantity of dangerous goods and wagon number in the train loaded with dangerous goods
- 8. Name of goods (official name of the goods)
- 9. UN number, number for marking of danger (all, if there are several)
- 10. Data on persons hired according to the Decision of the Ministry of the Interior of the Republic of Serbia in the capacity of armed company (first and last name, ID document number, etc., from the Decision issued by the Ministry of the Interior of RS)
- 11. Buffer wagon
- 12. Number of the decision on transport and name of issuing state authority.

The announcement should also contain two appendices:

- Photocopy of the Decision on transport issued by a relevant state authority, and
- For Class 1 dangerous goods: Instructions on special safety measures (MSDS lists) from the manufacturer of Class 1 dangerous goods;
- For Class 7: instructions on measures that the Railway Undertaking should take in transport, restrictions and required data on planned transport route as well as measures in case of danger that are adequate in relation to the consignment in accordance with RID 5.4.1.2.5.2.

Permit for transport of Class 1 dangerous goods is issued by the ministry responsible for the interior affairs, and permit for transport of Class 7 dangerous goods is issued by the authority responsible for protection against ionizing radiation and nuclear safety in the Republic of Serbia (Article 7 of the Law on Transport of Dangerous Goods). The announcement of transport should also contain the basic data on the Railway Undertaking and the transport organizer if case of irregularities or emergency events in transport of dangerous goods. In terms of data it is mandatory to specify the first name, last name and mobile phone number of the person (employed with the Railway Undertaking and/or transport organizer) who is always available during the transport.

4.8 Rules After Path Allocation

4.8.1 Non-usage of allocated train path

In cases when a Railway Undertaking is not using the allocated train path envisaged by the Timetable, IŽS will, depending upon the non-usage percentage, charge the reservation of train path, that is, IŽS will cancel the allocated train path.

IŽS is monitoring the realization of allocated train paths, in such a way that IŽS is calculating the train path utilization degree for all the allocated train paths.

The utilization degree is calculated by dividing the realized train path number of one train with the allocated train path number of the same train, and the result is shown in percentages.

The degree of utilization of allocated train paths is calculated monthly, for the calendar month.

IŽS reserves the right to cancel the allocated train path if a train path is utilized less than 25% of the monthly quota, that is, less than 50% of the monthly quota in case of congested infrastructure.

For the allocated train paths where the degree of utilization is less than the borderline degree of utilization, IŽS will charge the non-usage of the capacity.

The borderline degree of utilization, according to the type of the trains, is given in the below table 6.

Table No 6. Borderline degree of utilization



Train type	Borderline degree of utilization [%]	
Passenger trains	80	
Freight trains	40	
Facultative trains	10	

Facultative train is a train which has set timetable but operates with special announcement (if needed).

Requests for train paths for all other trains will have priority over the request for train paths for facultative trains.

Infrastructure Manager will not grant facultative train paths on congested infrastructure.

In cases when the degree of utilization of the train path is below the borderline degree of utilization, the Infrastructure Manger will charge the full price of the train path for the used train paths, and for the non-used train paths, which represent the difference between the borderline degree of utilization and the degree of utilization of one train path, IM will charge for the reservation of the train path.

The charge for the reservation is 20% of the agreed train path price.

If the train path is not used in its entirety, as agreed in contract, the full price of the train path will be charged, according to the required elements.

4.8.2. Rules of Cancellation

A Railway Undertaking may cancel the allocated train path as part of changes and amendments of the Timetable. If a Railway Undertaking cancels the allocated route or requires modifications of parameters for the already allocated train paths outside the deadlines set forth in Appendix 4.4 and if they are such that their implementation will result in freeing of infrastructure capacities, such as:

- Cancellation of a part of already allocated train path i.e. shortening of the train path while all other parameters of the allocated train path remain the same,
- Change in traffic regularity, such that the train is transferred from the regular train status into the facultative train status, or the prescribed number of train operating days is reduced,
- Reduction of train length,

IŽS will not charge the costs prescribed under the tariff system under item 5.10.

Cancellation of allocated train path is done in writing, to the following address:

- By mail:
- "Infrastructure of Serbian Railways" JSC Railway Infrastructure Access Department 6, Nemanjina St

11000 Belgrade, Serbia

- By e<u>-mail: sektor.pzi@</u>srbrail.rs

Cancelled train paths can be allocated to other railway undertakings by IŽS.



4.9. International Timetabling Process Redesign (TTR)

4.9.1. Objectives of TTR

RailNetEurope (RNE) and Forum Train Europe (FTE), supported by the European Rail Freight Association (ERFA) are currently working on a Redesign of the International Timetabling Process (TTR). The objective of TTR is to harmonise and improve the European rail timetabling system to significantly increase the competitiveness of railway transports.

TTR consists of different components, including in particular an improved planning of the distribution of infrastructure capacity (including temporary capacity restrictions) and the introduction of new capacity allocation processes.

The purpose is to better serve all market needs and achieve an optimised use of existing infrastructure capacity. In particular for passenger traffic it will mean earlier availability of the final timetable allowing earlier and more reliable ticket purchasing for passengers. For the majority of freight traffic, it will mean more possibilities for short-term path requests and thus more flexibility to better meet customers' needs.

Detailed information can be found on ttr.rne.eu and http://www.forumtraineurope.eu/services/ttr/.

TTR is planned to be fully implemented for the timetable 2025 provided that it is supported by the European and national legal framework.



5. SERVICES AND CHARGES

5.1 Introduction

Serbian legislation defined four types of services which railway undertakings can use with the aim of performing of transport operations on the allocated infrastructure capacity.

Categories of services offered by "Infrastructure of Serbian Railways" JSC to railway undertakings on the network are in line with the provisions of the Law on Railways and defined by the following documents:

- Decision on establishing of Joint Stock Company for Public Railway Infrastructure Management ("Official Gazette of RS" No 60/2015);
- Rulebook on organization and systematization of jobs at Joint Stock Company for Public Railway Infrastructure Management "Infrastructure of Serbian Railways";
- Methodology for valuation of elements for determining the charges for the use of railway infrastructure ("Official Gazette of RS" No 122/14).

The services that can be provided to railway undertakings are the following ones:

- 1. Minimum access package of services (hereinafter: the minimum package of services);
- 2. Basic services in services facilities including the access tracks to such facilities;
- 3. Additional services; and
- 4. Ancillary services.

Until the Government determines the Methodology for determining the price for access and the price for services and, based on it, the specific rules for calculation of the price for access and the price for services provided by the Infrastructure Manager, "Infrastructure of Serbian Railways" will apply the valid Methodology for valuation of elements for determining the charges for the use of railway infrastructure ("Official Gazette of RS" No 122/14), and according to this Methodology, where necessary, classification to the following service categories:

- category I: minimum package of services
- category IIa: package for track access to service facilities
- category IIb: package for provision of services in service facilities
- category III: package for additional services
- category IV: package for ancillary services

IM – "Infrastructure of Serbian Railways" JSC will enable all interested railway undertakings to use the minimum access package of services and track access to services facilities, in a non-discriminatory manner, provided that railway undertakings have fulfilled the requirements for rail transport service in accordance with the provisions of the Law on Railways and the signed Contract for the use of railway infrastructure. Railway Undertaking's requests for the use of facilities and services provided in such facilities may be rejected only if there are feasible alternatives enabling the railway undertakings to perform the transport of goods and passengers on the same or alternative transport routes under the economically acceptable conditions. According to the nature of distinction and type of activity, the former notion of service facility can be aligned with the notion of services facility in the entire text.

The use of all services facilities, additional and ancillary services provided by the IM – "Infrastructure of Serbian Railway—" JSC - will be enabled to all railway undertakings in a non-discriminatory manner and upon their request, and will be defined in a separate contract.

The use of services facilities not owned by the IM – "Infrastructure of Serbian Railways" JSC, as well as additional and ancillary services not provided by the IM – "Infrastructure of Serbian Railways" JSC, is subject to separate contracts with managers of the said facilities and service providers.



Based on the volume of services provided, as defined in items 5.2 to 5.10, Railway Undertaking pays a price for access and a price for the provided service to:

- "Infrastructure of Serbian Railways" JSC based on the Contract for the use of railway infrastructure and separate contracts;
- Other service providers based on separate contracts.

5.2 Charging Principles

The basic principles underpinning the charging regime for the use of infrastructure are set forth in the Methodology for valuation of elements for determining the charges for the use of railway infrastructure ("Official Gazette of RS" No 122/14, dated November 11, 2014). The Methodology is defining, in more detail, valuation of elements for determining the level of charge for minimum package of services and package for track access to service facilities and provision of services in service facilities.

The methodology is based on the principle that railway undertakings should only bear the justified cost of IM operations and the costs arising from the efficient provision of services requested by the users.

This methodology is based on the economic principle of valuation of elements for determining of charge level known as marginal cost plus (MC+). It is a charge setting principle based on marginal costs increased by the mark-up. The selected principle enables covering of justified costs arising in provision of requested services and is favourable for the so called "network systems" (systems that require major capital investments such as telecommunications, energy, natural gas transportation, road transport and other means of transport).

Marginal costs are estimated based on the variable costs which, within the Methodology, includeshort-term marginal costs: track wearing, train movement control and signalling, consumption of energy sources and overheads.

The charge is set based on the following elements: line category (main, regional or local) used by train, use of railway nodes, train category (passenger or freight) and traction type (electrical or diesel).

The components of the total charge include charge for the minimum package of services (category I), charge for track access to service facilities (category IIa), charge for providing the services in service facilities (category IIb), charge for providing the additional services in service facilities (category III) and charge for providing the ancillary services in service facilities (category IV).

5.2 Minimum Access Package and Charges

Minimum access package

Within the minimum package of services for the use of railway infrastructure, IŽS provides the following services:

- Handling of requests for capacity allocation;
- Right to use the allocated capacity;
- Use of infrastructure on the main running track (turnouts, tracks, railway nodes and lines),
- Train control including signalling, regulation of train movements, acceptance and dispatching of trains and communication regarding the train operations and provision of information on train movements:
- Use of electrical supply equipment, where available;
- Provision of all other information to implement or operate the service for which the capacity has been granted.

The access price includes the minimum access package of services. Railway Undertaking will pay the access price to "Infrastructure of Serbian Railways" JSC based on the Contract for the use of public railway infrastructure.



- Handling of requests for infrastructure capacity

Handling of requests for infrastructure capacity allocation is a part of the capacity allocation process described in Chapter 4. Principles, priorities and criteria for allocation of infrastructure capacity. Requests for infrastructure capacity allocation which have been submitted by railway undertakings are processed in mutual cooperation with railway undertakings, implementation possibilities are examined, contradictions resolved and the train path offer is prepared, which ultimately results in a Timetable.

- Right to use the allocated capacity

Provided that all necessary prerequisites for the train operation are in line with valid legal provisions on conditions for access to and use of railway infrastructure specified in Chapter 3 of the present Network Statement, the applicable legislation and the signed Contract for the use of railway infrastructure, Railway Undertaking is entitled to use the allocated capacity in the form of a train path.

- Use of infrastructure on main running track (turnouts, tracks, railway nodes and lines)

Use of infrastructure on main running track (turnouts, tracks, railway nodes and lines) on the allocated capacity enables the Railway Undertaking to perform train operations.

- Train control including signalling, regulation of train movements, acceptance and dispatching of trains and communication regarding the train operations and provision of information on train movements

Overall train traffic management, including signalling, train movement regulation, acceptance and dispatching of trains, communication regarding the train operations and provision of information on train movements using the telecommunication devices enables railway undertakings to perform train operations on the allocated train path.

- Use of electrical supply equipment

On its electrified railway lines IŽS enables a Railway Undertaking to use the electrical supply equipment for traction (without electricity).

- All other information to implement or operate the service for which the capacity has been granted

After the Timetable has been adopted and published, railway undertakings will be provided with all additional information required for the train operations within the minimum access package of services.

Charge for the minimum package of services (category I)

Charges for the minimum package of services for infrastructure access are defined based on the costs of railway traffic management and infrastructure capacities maintenance.

The level of unit charges is determined in relation to line category (main, regional, local), train category (passenger trains, freight trains) and traction type (diesel, electrical).

The charging units are:

- 1) Train km;
- 2) Gross tonne km.

Charge for minimum package of services (NKI) is determined according to the following formula:

$$NKI = (\sum VKM_{ijk} \cdot C_{VKM_{ijk}}) + F \cdot (\sum BRTKM_{ij} \cdot C_{BRTKM_{ij}})$$

Kev:

i – Line category (main, regional, local)



i – Train category (passenger trains, freight trains)

k – Traction type (diesel, electrical)

 $(\sum VKM_{ijk} \cdot C_{VKM_{ijk}})$ - charge for the use of infrastructure capacities for the minimum package of services in relation to line category (i), train category (j) and traction type (k)

 VKM_{ijk} - number of train km on the network in relation to line category (i), train category (j) and traction type (k)

 C_{VKM} - charge per one train km in relation to line category (i), train category (j) and traction type (k)

F - factor depending on the train category (factor level depends on the train category impact on the level of infrastructure maintenance costs or the applied strategy for development of a particular segment of railway market)

 $(\sum BRTKM_{ij} \cdot C_{BRTKM_{ij}})$ - charge for wearing out of line and tracks during train passing in relation to line category (i) and train category (j)

 $^{BRTKM}_{ij}$ - number of gross-tonne km on the network in relation to line category (i) and category of the train (j)

 C_{BRTKM} - charge per one gross-tone km in the function from the line category (i) and train category (j)

The level of charge for the path of one train depends on the train gross mass. Gross-tonne km, in the sense of the calculation of the level of charge for the path of one train, is defined as a product of train km and train gross mass, which implies the total mass of all working locomotives and the total mass of all hauled stock.

Freight trains with electrical traction

Line category	Charge per one train km [RSD/TKM]	Charge per one gross-tonne km [RSD/GTKM]
Main line	93,50	0,0858
Regional line	63,77	0,0781
Local line	10,53	0,0361

Freight trains with diesel traction

Line category	Charge per one train km [RSD/TKM]	Charge per one gross-tone km [RSD/GTKM]
Main line	79,04	0,0858
Regional line	51,24	0,0781
Local line	10,07	0,0361



Passenger trains with electrical traction

Line category	Charge per one train km [RSD/TKM]	Charge per one gross-tone km [RSD/GTKM]
Main line	62,33	0,0686
Regional line	42,51	0,0625
Local line	7,02	0,0289

Passenger trains with diesel traction

Line category	Charge per one train km [RSD/TKM]	Charge per one gross-tone km [RSD/GTKM]
Main line	52,69	0,0686
Regional line	34,16	0,0625
Local line	6,71	0,0289

Factor depending on the train category [F] – applied to all types of freight trains and passenger trains and it amounts to 1.0.

Charge for track access and use of service facilities (categories Ia and IIb)

Charges for track access and use of service facilities are defined based on the costs of railway traffic regulation and infrastructure capacities maintenance.

The level of unit charges is determined in relation to railway node (Subotica, Novi Sad, Beograd, Lapovo, Niš, Pančevo), train category (passenger trains, freight trains) and traction type (diesel, electrical).

The charging units are:

- 1) Number of trains;
- 2) Gross tonne km;
- 3) Number of serviced trains.

The charge is levied for the trains starting and finishing their running in the railway node, that is, transiting the railway nodes, as well as for the trains in railway nodes.

Serviced train is a train to which a service of using the service facilities in a railway node has been provided aiming to use the services of technical-wagon unit in train inspection, maintenance of wagons, railway vehicles and machinery.

Access and use of service facilities (categories IIa and IIb)

Charge for use of infrastructure when the trains are starting and finishing their running in the node, that is, when they are transiting railway nodes (NKIIa), as well as for servicing of the trains in the railway nodes (NKIIb) is determined as follows:

$$NKII = NKIIa + NKIIb$$

$$Key:-NKIIa = (\sum Va_{lmn} \cdot C_{Va_{lmn}}) + (\sum BRTKM_{lm} \cdot C_{BRTKM_{lm}})$$



$$NKIIb = \sum Vb_{lm} \cdot C_{Vb_{lm}}$$

1 - Node (Subotica (1), Novi Sad (2), Beograd (3), Lapovo (4), Niš (5), Pančevo (6))

m – Train category (passenger trains, freight trains)

n – Traction type (diesel, electrical)

 $(\sum Va_{lmn} \cdot C_{Va_{lmn}})$ - charge for the use of infrastructure capacities in the node for the package of services IIa in relation to node (1), train category (m) and traction type (n)

 Va_{lmn} - number of trains in the node in relation to node (1), train category (m) and traction type (n)

 C_{Valimn} - charge per one train of used infrastructure capacities in the node, in relation to node (l), train category (m) and traction type (n)

 $(\sum BRTKM_{lm} \cdot C_{BRTKM_{lm}})$ - charge for wearing out of railway line and railway track when using the infrastructure capacities in the node, for package of the services IIa in relation to node (l) and train category (m)

BRTKM_{Im} - number of gross-tonne km in the node, in relation to node (l) and train category (m)

 C_{BRTKM} - charge per one gross-tonne km in the node in relation to node (1) and train category (m)

 $\sum_{lm} C_{Vb_{lm}}$ - charge for providing the services of train "servicing" in the node, for package of services IIb, in relation to node (l) and train category (m)

 Vb_{lm} - the number of trains which were provided the service (which were "serviced") in the node, in relation to node (1) and train category (m)

 $C_{Vb_{lm}}$ - charge per one train, "serviced" in the node, in relation to node (1) and train category (m)

Freight trains with electrical traction

Node	Charge for the use of infrastructure capacities in the node per one train [RSD/train]	Charge per one gross-tonne km in the node [RSD/GTKM]
Novi Sad	3.658,76	0,0801
Beograd	4.302,04	0,0894
Lapovo	4.987,87	0,0744
Niš	5.422,50	0,1171
Pančevo	3.257,01	0,0911
Subotica	4.097,11	0,0497

Freight trains with diesel traction

Node	Charge for the use of infrastructure capacities in the node per one train [RSD/train]	Charge per one gross-tonne km in the node [RSD/GTKM]
Novi Sad	3.607,21	0,0801
Beograd	4.145,57	0,0894
Lapovo	4.935,40	0,0744
Niš	5.293,94	0,1171
Pančevo	3.196,24	0,0911
Subotica	3.944,07	0,0497



Passenger trains with electrical traction

Node	Charge for the use of infrastructure capacities in the node per one train [RSD/train]	Charge per one gross-tone km in the node [RSD/GTKM]
Novi Sad	2.439,17	0,0534
Beograd	2.868,03	0,0596
Lapovo	3.325,25	0,0496
Niš	3.615,00	0,0781
Pančevo	2.171,34	0,0607
Subotica	2.731,41	0,0332

Passenger trains with diesel traction

Node	Charge for the use of infrastructure capacities in the node per one train [RSD/train]	Charge per one gross-tone km in the node [RSD/GTKM]
Novi Sad	2.404,81	0,0534
Beograd	2.763,71	0,0596
Lapovo	3.290,27	0,0496
Niš	3.529,29	0,0781
Pančevo	2.130,82	0,0607
Subotica	2.629,38	0,0332

5.4 Additional Services and Charges

Additional services include:

- Supply of electricity for train traction;
- Preheating of the passenger trains, water supply, etc.;
- Modified contracts for the service:
 - (1) control of transport of dangerous goods,
 - (2) assistance in transport of special trains (exceptional consignments).

Use of the above mentioned services provided by IŽS will be enabled to all railway undertakings that have been allocated a minimum access package of services, in a non-discriminatory manner and upon their request.

Railway undertakings must present the request for the use of additional services in the capacity allocation process, please refer to Chapter 4.

In order to be able to use the above services a Railway Undertaking is obliged to conclude a separate contract with IŽS or with another service provider and pay the charge for provided service in accordance with the provisions of such contract.

More detailed information on provision of additional services can be obtained from IŽS.

"Infrastructure of Serbian Railways" JSC Railway Infrastructure Access Department 6 Nemanjina St



57

11000 Belgrade, Serbia Tel: +381 11 3618 214 Fax: +381 11 36<u>16 814</u> <u>sektor.pzi@</u>srbrail.rs

The level of charges for additional services provided by Infrastructure Manager is determined based on the costs incurred during the provision of these services.

Charges for using the additional services are applied in a non-discriminatory manner for all the railway undertakings, that is, service users.

When determining the level of prices the time norms for performing of tasks were used in accordance with the Methodology for determining the required number of workers for performing the planned scope of work ("Official Gazette of ŽTP Beograd" 10/85) and the price for hiring of staff according to the Methodology for calculation of labour sales price per effective hour for the employees of "Infrastructure of Serbian Railways" (Decision of the Board of Directors 4/2015-53-17 dated 29.12.2015) and other valid railway regulations and documents.

The prices of additional services are determined in accordance with the Methodology for valuation of elements for determining the charges for the use of railway infrastructure. The levels of prices for additional services are determined as a product of standardized period for service performing and price of effective working hour of staff hired to provide the service, and they are solely based on the actual cost of work incurred during the provision of the particular service or directly determined by means of the Infrastructure Manager's separate decision.

Additional services are provided upon the Railway Undertaking's request, and the prices are applied in a non-discriminatory manner for all railway undertakings. Railway Undertakings will pay such prices according to the actual level of use.

- Supply of electricity for traction and charges

For the service of supply of electricity for traction please refer to: Electrical Engineering Department 6, Nemanjina St 11000 Belgrade, Serbia

Tel: +381 11 3618 241 Fax: +381 11 36<u>18 130</u> <u>direktor.etp@</u>infrazs.rs

The prices of traction electricity depend on the prices of electricity determined by the supplier (currently JP Elektroprivreda Srbije), actual consumption costs, gross tonne km and train type. The calculation method is provided in Appendix 9.

- Preheating of the passenger trains

On IŽS network there is a device for preheating of passenger trains installed in Subotica station. "Infrastructure of Serbian Railways" JSC is not providing services of preheating of passenger trains, water supply etc.

More information regarding the preheating of passenger trains are available at"

"Srbija Voz" a.d. 6, Nemanjina St. 11 000 Belgrade, Serbia Tel: +381 11 3614 811 Fax: +381 11 3614 811

Email: putnik.info@srbvoz.rs



- Services for transport of exceptional consignments and dangerous goods

a) Services for transport of exceptional consignments

IŽS provides the service of transport of exceptional consignments (vehicles or items) according to the provisions for transport of exceptional consignments prescribed under the Regulations on transport of exceptional consignments.

The service involves processing of railway undertaking's request to examine the possibilities for transport in terms of technical aspect and setting of other technical requirements and protective measures for transport of consignments that are not fulfilling the general technical standards for transport on the particular line section, e.g. loading gauge, axle loading etc. Any deviation from the standards is considered to be an exceptional consignment and a special procedure is required. The service involves additional engagement of IŽS's employees in preparation and carrying out of transport of exceptional consignments such as: defining of transport conditions, possible engagement of additional staff for monitoring of transport and inspection of tracks after the transport, possible temporary re-location of trackside facilities and equipment etc.

IŽS is deciding whether it is possible to accept certain transport and under which conditions. It is necessary that for, every individual transport, IŽS and the Railway Undertaking define the scope and specification of needed services.

b) Services for dangerous goods transport

IŽS provides additional services to railway undertakings related to transport of dangerous goods. Control of dangerous goods transport for every individual transport is defined between IŽS and the Railway Undertaking, depending upon the specification of needed services. The availability and method of providing this service on IŽS network will be determined based on the decisions and procedures which will be subsequently prescribed by IŽS.

Charges for services of transport of exceptional consignments and dangerous goods

The unit price of additional services regarding the transport of exceptional consignments and dangerous goods is determined based on the actual costs incurred in provision of such service and unit prices of staff hired from the public railway infrastructure manager and is applied in a non-discriminatory manner to all railway undertakings.

Issuing of approvals for transport of exceptional consignments

Operation	Measuring unit	Price in RSD VAT exclusive
Processing of request, issuing of conditions and informing by means of telegramme for the purposes transport of exceptional consignments	Request for transport of exceptional consignment	12.976,00

Accompanying the consignments by professional railway staff, as necessary, according to type and complexity of exceptional consignment transport as set out in the Regulations on transport of exceptional consignments.

Unit price for this service is determined according to effective working hours of hiring of the employee and number of persons accompanying the exceptional consignment.

Operation - operators	Measuring unit	Price in RSD VAT exclusive
-----------------------	----------------	----------------------------



Accompanying performed by an employee from traffic department	Effective hour of accompanying	1.844,00
Accompanying performed by an employee from civil engineering department	Effective hour of accompanying	1.339,00
Accompanying performed by an employee from electrical engineering department	Effective hour of accompanying	1.453,00

If the employee accompanying the consignment is entitled to daily allowance for the business trip in the country, the service price should also include the cost of realized daily allowances. The amount of daily allowances is determined in the Collective Agreement of the public railway Infrastructure Manger.

Transport of exceptional consignments with exceeded axle-loading

The unit price for approving the transport of exceptional consignment with exceeded axle-loading is 59,00 RSD/net tonnes VAT exclusive.

5.5 Ancillary Services and Charges

Ancillary services include the following:

- 1) access to telecommunications network
- 2) provision of additional information
- 3) technical inspection of rolling stock
- 4) ticketing services in passenger stations
- 5) maintenance services provided in maintenance facilities dedicated to high speed trains or other types of rolling stock requiring specific facilities where the works performed are not a routine daily maintenance and require the vehicle to be withdrawn from service
- 6) other ancillary services

IŽS reserves the right to decide which of the available ancillary services will be provided and under what conditions. If IŽS is providing a particular service, it will provide it to all railway undertakings under equal conditions in a non-discriminatory manner and upon their particular request.

The charges for ancillary services provided by "Infrastructure of Serbian Railways" JSC will be determined based on the actual costs incurred during the provision of the said service and will be a subject to a separate contract concluded between the interested parties.

- Access to telecommunications network

IŽS provides railway undertakings with the service of access to the telecommunications network in accordance with the market conditions. Railway Undertaking should define, together with IŽS, the scope and specification of required services.

- Provision of supplementary information

IŽS provides, if available, the following supplementary information on the use of railway infrastructure to the railway undertakings:

- Provision of Timetable material (timetable graphs, timetable booklets) prepared and published by IŽS;
- Submission of excerpts from the local regulations of importance for railway transport or other documents.

For any further information the Railway Undertaking should define, together with IŽS, the scope and specification of required services.



- Technical inspection of rolling stock

Technical inspection of rolling stock is performed upon obtaining of license for their use and prior to putting the vehicles into service.

Directorate for Railways prescribes the conditions to be fulfilled by the entities performing the technical inspection of vehicles and the manner for performing of technical inspection.

Only the rolling stock fulfilling the requirements prescribed by the Law on Safety can be included in the train and this is determined by means of a rolling stock inspection.

Railway Undertaking is responsible for proper composition of the train and it is obliged to check whether the train rolling stock is in a proper technical condition. Train composition and distribution of rolling stock in the train must ensure safe train movement and braking.

"Infrastructure of Serbian Railways" JSC is not providing the services of technical inspection of wagons and rolling stock.

- Ticketing services in passenger stations

"Infrastructure of Serbian Railways" JSC is providing the ticketing services in passenger stations according to the special request of interested Railway Undertaking and according to its own capacities and assessment of impact on its staff's basic work process.

- Maintenance services provided in maintenance facilities dedicated to high-speed trains or other types of rolling stock requiring specific facilities

The network operated by "Infrastructure of Serbian Railways" JSC currently does not have any maintenance facilities dedicated to high speed trains or other types of rolling stock requiring specific facilities providing the respective ancillary services.

- Other ancillary services

IŽS provides other ancillary services:

• Staff training and/or testing in line with the internal documents and technological procedures of IŽS.

Staff training and testing

The service of training and testing of public railway infrastructure user's staff is provided by the Infrastructure Manager in accordance with articles 60 to 64 of the Law on Safety in Railway Traffic ("Official Gazette of RS" No 41/2018) .The price for training and testing of interested users is determined as follows:

$$Cpp = Tpo + Tto + Tpz + Tos$$

This price includes:

- cost of practical training Tpo performed by minimum one expert from the Infrastructure Manager (familiarizing the candidates with the local conditions and technical capacities);
- cost of theoretical training Tto performed by minimum two lecturers (familiarizing with signalling and traffic regulations, special measures for occupational safety and protection as well as all important normative acts provisions of station regulations, technological work process etc., and if necessary provisions in connection to the transport of dangerous goods);
- cost of testing Tpz taking of expert exam regarding the familiarity with railway infrastructure performed by minimum four members of expert committee (president, 2 examiners from the expert field and 1 examiner on the provisions of measures for occupational safety and protection);



- cost of staff Tos hired for the provision of respective service according to the actual level of realization (daily allowances, travelling expenses, submission of required materials etc.)

The price for this service is determined in accordance with the separate Contract between IŽS and the interested party and specification of costs is provided in a descriptive manner and expressed according to the number of candidates and hired experts from the Infrastructure Manager involved in provision of this service.

5.6 Discounts

"Infrastructure of Serbian Railways" JSC does not approve quantity discounts.

5.7 Performance Scheme

One of the most important indicators of efficient network operations, both for Railway Undertaking and Infrastructure Manager, is train delay.

Train delays are monitored related to the causes of delays. Accordingly, the delays can be primary and secondary.

Primary delays are all train delays caused by interference or disturbance which led to the delay and that were not caused by delay or cancellation of other train.

Secondary delays are train delays caused by already existing earlier delay.

Overview of primary and secondary causes of train delays is presented in Appendix 7 of the Network Statement.

IŽS keeps a record of movements of all trains on its network and determines the causes of delay.

Delays can be caused by the following:

- Infrastructure Manager,
- Railway Undertaking,
- external factor.

Number of minutes of train delay is determined on the basis of deviation of train actual running time compared to the train running time envisaged by the Timetable.

The compensation for all primary train delays is calculated on the basis of the number of minutes of train delay and charged between IŽS and RU, if agreed under the Contract for the use of railway infrastructure. The reason for this is to motivate the Railway Undertaking and the Infrastructure Manager to minimize the Timetable deviations on the network and to increase the quality of transport service offered to the end users.

The compensation for delay is 0.1% of the charge for the entire train path, for every minute of delay. The total amount of the delay compensation for every individual train can be maximally up to 5% of the charge for the entire train path, for each party responsible.

For the delays of passenger trains less than 10 min per 100 km of allocated train path, that is, for the delays of freight trains of less than 40 min per 100 km of allocated train path, the charging between IŽS and RU is not performed. Calculation is performed solely for the entire train path, not for the particular parts of the path.

For the train paths shorter than 100 km the permitted delay is determined proportionally to the actual path length.

If the Railway Undertaking does not start the train 300 minutes after the prescribed departure according to the Timetable, it will be deemed that the train path of that train has been automatically cancelled for that day.



Train delays, caused by accidents or incidents, in respect of which the responsibility for the delay cannot be determined with certainty without the investigation procedure, will be calculated subsequently.

Delays caused by the external factor arise from the circumstances which are not under influence of the Infrastructure Manager or the Railway Undertaking. Delays caused by the external factor are the delays caused by the force majeure, or the delays caused by the third parties.

5.8 Changes to Charges

Charges for the minimum package of services and track access to service facilities, as well as charges for additional and ancillary services, can be modified depending on the conditions on the market of the railway services, in which case it must be published at least six months in advance.

5.9 Billing Arrangements

Method and time schedule for calculation and payment of charges, will be determined in detail in the contract between the Infrastructure Manager and the Railway Undertaking.

Charges are collected through:

Finance Department 6 Nemanjina Str. 11 000 Belgrade, Serbia Phone: +381 11 3618 465 Fax: +381 11 3618 465

finansijeizs@srbrail.rs

The Finance Department defines the payment security instrument for the use of public railway infrastructure.

For the use of public railway infrastructure during the validity period of 2023/2024 Timetable, the payment security instrument is defined according to the following:

The RU undertakes to submit to "Infrastructure of Serbian Railways" JSC (Finance department) with respect to the timely settlement of due obligations under the contract on the use of public railway infrastructure, 5 (five) blank solo bills of exchange registered with the National Bank of Serbia, bill of exchange authorization and a copy of the card of specimen signatures. Blank solo bills of exchange must be submitted within 15 days from the date of signing the contract on the use of public railway infrastructure, otherwise, the contract will have no legal effect. The term of validity of the bill of exchange authorization must be at least 30 days longer than the date of final settlement of the contractual obligation and is not related to the termination of legal effect under the Contract. The RU is obliged to submit to "Infrastructure of Serbian Railways" JSC, Finance department, new instruments for securing the regular settlement of financial obligations in case the previously submitted ones are implemented, i.e. when other circumstances arise due to which the previously submitted instruments cannot be implemented, no later than 15 days from the new circumstance's occurrence.

The Finance Department monitors the realization of the payment of due obligations under the contract on the use of public railway infrastructure, and in case the RU does not settle the due obligations within the deadline, it has the right to activate bills of exchange, which were submitted in order to secure payment.

If during the duration of the Contract on the use of public railway infrastructure, due to a delay in the settlement of obligations, a security instrument is activated, the RU will be obliged to provide a bank guarantee as an instrument for securing the payment in the following contract.

5.10 Tariff system

IŽS charges fee for the train path allocation procedure costs as follows:



- for the allocation of annual train paths for the 2023/2024 Timetable nor for the allocation of train paths under the requests for amendment of annual 2023/2024 Timetable performed within the deadlines prescribed in Appendix 4.4, IŽS will not charge procedure costs.
- for allocation of train path under the extraordinary request for amendment of the annual timetable amount to 17.137,00 RSD per train path.
- for allocation of ad-hoc train path amount to 12.213,00 RSD per train path.



6. OPERATIONS

6.1 Introduction

The transport operation on the railway infrastructure shall be such manner to ensure the protection of life, property and environment. The railway undertaking operating on the railway infrastructure will be obligated to comply with the regulations and provisions applicable to transport operations on the particular railway infrastructure.

6.2 Operational Rules

The list of applicable regulations and instructions related to operational rules is given in a separate Annex 2.

At some locations on the infrastructure and in some cases, there are deviations from the applicable regulations (approved by the Directorate for Railways upon IŽS's proposal). The information about this is published by IŽS. The relevant address for these regulations, instructions and modifications is:

"Infrastructure of Serbian Railways" JSC Traffic Department 6 Nemanjina Street 11000 Belgrade Serbia

Tel.: +381 11 3618 214 Fax: +381 11 3616 814 sektor.sp@srbrail.rs

6.3 Operational Measures

In case of traffic disturbances, IŽS, together with Railway Undertakings, will undertake all necessary measures to restore normal operating conditions as soon as possible.

Traffic disturbance will mean congesting of some parts of the network or stations that may occur as a consequence of disturbances occurring in traffic due to any reason.

6.3.1. Principles

In order to solve the traffic disturbances, IŽS will undertake appropriate measures to restore the planned Timetable, while taking into consideration the needs of passengers and users of freight traffic, as well as traffic safety. Aiming to solve the traffic disturbances, IŽS may apply operation rules under 6.3.2., cancel some trains or assign another train path in agreement with a Railway Undertaking, depending on the type of disturbance and expected duration.

In case a longer traffic disruption is expected, IŽS will, in agreement with railway undertakings, prepare an interim timetable for the period until regular operation is restored. IŽS may seek railway undertakings' assistance with the aim of normalizing the traffic operating conditions, even when such railway undertakings are not directly causing the disturbances, which may include using their rolling stock and personnel in order to normalize the traffic.

6.3.2. Operation regulation

For the purposes of restoring the normal traffic flow, the operational rules for railway traffic management will apply as set out in the Law on Safety in Railway Traffic, Traffic Regulations ("Official Gazette of RS" No 34/22 and 107/22), the Instructions on particular procedures in performing of traffic service on the territory of Infrastructure of Serbian Railways ("Official Gazette of Serbian Railways" No 43/22), the Instructions on organization and work procedures of operational service in the area covered by "Infrastructure of Serbian Railways" JSC ("Official Gazette of Serbian Railways" No 21/17, 21/18 and 37/18) and other internal documents of IŽS.



In cases when traffic is interrupted on some part of the line due to a defect in the traction means of the RU in order to normalize traffic as soon as possible the IŽS operational service takes operational measures prescribed by article 34 of the internal act Instructions on organization and work procedures of operational service in the area covered by "Infrastructure of Serbian Railways" JSC ("Official Gazette of Serbian Railways" No 21/17, 21/18 and 37/18).

In case of delays and premature train dispatches, the rule applies that lower-ranking trains may not interfere with movements of higher-ranking trains. A lower-ranking train can be given the priority only if in such a way increase in delays is avoided and the higher-ranking train can make up for the delay on its further route. With same rank trains, priority is given to that train whereof delay might cause it to lose connections in connecting stations. If the connections are not in question, priority is given to that train which has a longer route to its destination station, i.e. which is running on time. Necessary measures to be taken in case of accidents and incidents are defined in the Law on Safety in Railway Traffic, by the Rules on reporting, investigating, recording, statistical monitoring and publishing of data on accidents and incidents ("Official Gazette of Serbian Railways" 44/21). Instructions on procedures in case of accidents and incidents ("Official Gazette of Serbian Railways" 44/21). Trains which are taking part in rectifying the disturbances caused as a result of accidents and incidents have the priority (ranking) over all other trains.

6.3.3. Foreseen and Unforeseen problems

Foreseen problems

Necessary measures to be undertaken in cases of foreseen problems such as: technical disturbances of signalling & safety and telecommunication devices, strong wind, natural disasters, snow etc., are governed by Traffic Regulations ("Official Gazette of Serbian Railways" No 34/22 and 107/22) and other regulations governing the above mentioned.

Unforeseen problems

In very urgent cases, when railway infrastructure is temporarily rendered unavailable for use, IŽS may, without prior notice, cancel train paths for the time period necessary to put the system back in working order. IŽS will notify all interested parties of the resulting situation.



7. SERVICE FACILITIES

7.1. Introduction

Services facility means a facility, including land, buildings and equipment, arranged in a particular manner, as a whole or partially, including the sidings connecting the network with the service facility, in order to enable provision and use of basic services provided in such facilities under the non-discriminatory and transparent conditions.

7.2. Service Facility Overview

Services facilities are:

- 1) station buildings, i.e. a part of station buildings, in passenger stations, intended for railway passengers, and other facilities used in passenger traffic, including the travelling information displays and the appropriate ticketing points;
- 2) freight terminals;
- 3) marshalling yards and train formation tracks, including the shunting tracks;
- 4) tracks for storing intended for railway undertakings' vehicles using the allocated infrastructure capacity;
- 5) maintenance facilities, with the exception of maintenance facilities for high speed trains or other types of rolling stock requiring specific facilities where the works performed are not routine works performed as a part of daily activities and require withdrawal of vehicle from service;
- 6) other technical facilities, including the cleaning and washing facilities;
- 7) inland waterways port facilities connected to railway activities;
- 8) facilities for provision of assistance;
- 9) facilities for fuel storing and supplying for which the prices are presented separately.

7.3. Service Facilities Managed by IŽS

IŽS will enable all railway undertakings, which have been granted the minimum access package of services for the use of infrastructure, to use all the services facilities managed by it in a non-discriminatory manner and upon their request.

7.3.1. Common Provisions

IŽS will enable all the railway undertakings with minimum access package of services to have track access to all the above mentioned services facilities in a non-discriminatory manner and upon their request, provided that railway undertakings have previously entered into a contract on the use of these facilities with facility managers and service providers.

Railway undertakings have to state the need to have track access to service facilities and to use them during the capacity allocation procedure, please refer to Chapter 4.

For the service of track access to service facilities, Railway Undertaking will be obliged to pay a charge to the IŽS based on the Contract for the use of infrastructure.

7.3.2 Use of station buildings in the function of passenger traffic

Appendix 6 contains an overview of locations where passengers may board/get off the train.

The stations along the narrow gauge lines are used for passenger service only.



"Infrastructure of Serbian Railways" will enable the use of station buildings, i.e. the part of station buildings, in passenger stations in the areas intended for railway passengers and of other facilities used for passenger traffic, including the travel information display and adequate location for ticketing services to all railway undertakings in a non-discriminatory manner and upon their request.

The use of parts of service points (station buildings, stops) and other facilities required for acceptance and dispatching of passengers also includes use of platforms and other surfaces required for access of passengers in them, as well as other areas enabling passenger movements between public road surfaces and the train.

The use of travel information displays includes the use of all existing visual information facilities already installed in individual stations.

Upon request of a Railway Undertaking IŽS will, where possible, provide a suitable area for the ticketing services.

7.3.3 Freight Terminals

The term "freight terminals" on the railway network operated by Infrastructure of Serbian Railways (IŽS), means all the railway service points used for freight operations where loading and unloading as transshipment operations are carried out.

The following types of terminals are distinguished: stations and transport forwarding, terminals for intermodal freight transport, port terminals.

Overview of services facilities for freight operations is presented in Appendix 6.

Combined transport on railway network can be performed at terminals for combined transport and at port terminals.

Table No 7: Stations connected to freight terminals

No	Railway station connected to the terminal	Freight terminal for combined transport	Address of freight terminal for combined transport	Terminal operator
1.	Beograd Marshalling yard (Belgrade Marshalling Yard)	ŽIT Beograd	Beograd Marshalling yard, Železnik, Lole Ribara 2.	"ŽIT Beograd" d.o.o., Beograd, Železnik, Lole Ribara 2
2.	Surčin	Nelt	Beograd, Dobanovci, Maršala Tita 206.	"Nelt Co" d.o.o., Beograd
3.	Novi Sad Marshalling yard (Novi Sad Marshalling Yard)	Luka (Port) Novi Sad	Novi Sad, Carinska 1.	"Luka Novi Sad" a.d., Novi Sad, Carinska 1
4.	Pančevo Varoš	Luka (Port) Dunav	Pančevo, Luka Dunav 1.	"Luka Dunav Pančevo" a.d., Pančevo, Luka Dunav 1
5.	Smederevo	Luka (Port) Smederevo	Smederevo, Radinac b.b.	"Luka Dunav – Železara Smederevo" d.o.o., Smederevo, Radinac b.b.
6.	Prahovo Pristanište	Luka (Port) Prahovo	Prahovo, Radujevački put b.b.	"Luka Prahovo IHP Prahovo— Krajina" d.o.o., Prahovo, Radujevački put b.b.
7.	Senta	Luka (Port) Senta	Senta, Pristanišna 1.	"Luka Senta" a.d., Senta,



				Pristanišna 1
8.	Sremska Mitrovica	II lika i Porti i eget	Sremska Mitrovica, Jarački put 10.	"RTC Luka Leget" a.d., Sremska Mitrovica, Jarački put 10
9.	Sapac	Luka (Port) Zorka Šabac	Šabac, Narodnih heroja 1.	"Zorka transporti" d.o.o., Šabac, Narodnih heroja 1
10.	\mathcal{C}	MBOX Terminals d.o.o	Freight-transport terminal in Niš Vojlovački zaseok 4 St. 18560 Popovac (Niš)	MBOX Terminals d.o.o

IŽS does not operate nor provide basic services in any freight terminal within the meaning of its definition of an arranged and organized area where the receiving, storage, preparation, transshipmenthipment and dispatching of various types of goods is carried out.

For more detailed information on the services provided by the freight terminal operator or the service provider, the following entities should be contacted:

1) Železnički integralni transport Beograd - ŽIT BEOGRAD d.o.o.

Addresses: Beograd Marshalling Yard (Belgrade Marshalling Yard), Lole Ribara 2 Železnik, Belgrade and Hajduk Veljkov Venac 4/1

11000 Belgrade, Serbia

Contact details: +381 (0)11 361-6844, +381 (0)-1 361 - 6842, +381 (0)64 81040.

2) "Nelt Co." d.o.o. Beograd

Address: Maršala Tita 2016, 11272 Dobanovci, Belgrade

Contact details: +381 (0)11 3779-143, office@nelt.com, www.neltlsp.com

Information on the service facility operated by Nelt Co, i.e. on the industrial siding which is a part of Nelt terminal is provided in Appendix 3.10a.

3) DRY PORT TERMINALS DOO

Addresses: Luka Dunav 1, 26000 Pančevo and Uzun Mirkova 3/3, 11000 Belgrade Contact details: + 381 69 32 55 012, office@dpterminal , http://dpterminals.rs Information on the service facility are available on http://dpterminals.rs//

4) "MBOX Terminals" d.o.o

Address: Freight-transport terminal in Niš, Vojlovački zaseok St 4, 18560 Popovac (Niš)

Contact details: +381603593499 e-mail: operations@mboxt.com

Information on the service facility are available on https://mboxt.com

IŽS however provides the use of service points open for freight traffic, in accordance with Appendix 6 of this document, for loading, unloading and transshipmenthipment to all railway undertakings in a non-discriminatory manner and upon their request.



7.3.4 Marshalling Yards and Train Formation Facilities, including Shunting Facilities

Freight train formation yards

Freight trains may be split-up and formed at the marshalling, distribution and intermediate stations/yards, according to the user needs and requirements, and taking into account the particular technical and organizational restrictions.

Overview of distribution stations-sections for freight trains operation

Distribution Station	Distribution Section	Comments
1	2	3
BELGRADE MARSHALLING YARD	Belgrade Marshalling Yard- Pančevo Main St. Belgrade Marshalling— Yard - Ruma Belgrade Marshalling Yard- Lapovo Marshalling Yard Belgrade Marshalling— Yard— (Mala Krsna) ¹⁾ — Lapovo Marshalling— Yard Belgrade Marshalling— Yard— Mala Krsna Belgrade Marshalling—Yard— Požega Belgrade Marshalling Yard— Novi Sad Marshalling Yard	For all trains not entering the Belgrade Marshalling Yard, the distribution station operations are taken over by Ostružnica and Resnik stations. 1) For the trains not entering the Mala Krsna station
Bogojevo - Sombor Bogojevo - Novi Sad Marshalling Yard Bogojevo - Erdut (HŽI)		
BOR FREIGHT STATION	Bor Freight St Požarevac Bor Freight St Zaječar Bor Freight St Prahovo pristanište	
BIJELO POLJE	Bijelo Polje –(ŽICG) - Vrbnica -Prijepolje	
(ŽICG)	Freight St.	
BRASINA	Brasina - Ruma Brasina - Zvornik ¹⁾ Brasina - Zvornik Novi (ŽRS)	1) in both directions
VRŠACVršac - Pančevo st. Vršac - Stamora Moravita (CFI	R SA)	
DIMITROVGRAD	Dimitrovgrad – Niš Marshalling Yard Dimitrovgrad –Kalotina Zapad	
ERDUT (HŽI)	Erdut–(HŽI) - Bogojevo	
JIMBOLIA (CFR)	Jimbolia (CFR SA) - Kikinda	
ZAJEČAR	Zaječar - Niš Marshalling Yard Zaječar - Prahovo Pristanište Zaječar - Bor Freight St.	
ZVORNIK NOVI (ŽRS)	Zvornik Novi (ŽRS) - Brasina	
ZRENJANIN	Zrenjanin - Kikinda Zrenjanin - Novi Sad Marshalling Yard Zrenjanin - Pančevo Main St. Zrenjanin - Senta Zrenjanin - (Senta) ¹ - Subotica Freight St.	for the trains not entering the Senta station
KIKINDA	Kikinda – Jimbolia (CFR SA) Kikinda – Zrenjanin Kikinda – Senta Kikinda – (Senta) ¹ – Subotica Freight St.	1) for the trains not entering the Senta station



KOSOVO POLJE	Traffic is temporarily regulated by UNMIK railways	
KRALJEVO	Kraljevo - K. Mitrovica Sever ¹⁾ Kraljevo - Lapovo Marshalling Yard Kraljevo - Požega Kraljevo - Stalać ²⁾ Kraljevo - (Požega) ³⁾ - Prijepolje Freight St.	 in both directions in both directions for the trains not entering the Požega station
LAPOVO MARSHALLING YARD	Lapovo Marshalling Yard – Mala Krsna Lapovo Marshalling Yard – Resavica ¹⁾ Lapovo Marshalling Yard - Niš Marshalling Yard Lapovo Marshalling Yard - Kraljevo Lapovo Marshalling Yard - Požarevac Lapovo Marshalling Yard - Ostružnica - Ruma Lapovo Marshalling Yard – Resnik - Pančevo Main St. Lapovo Marshalling Yard (Mala Krsna) ²⁾ Belgrade Marshalling Yard Lapovo Marshalling Yard Lapovo Marshalling Yard – Belgrade Marshalling Yard	For the trains not entering the Lapovo Marshalling Yard, the distribution operations are taken over by Lapovo station. 1) in both directions 2) for the trains not entering the Mala Krsna station
MALA KRSNA	Mala Krsna – Požarevac Mala Krsna – Lapovo Marshalling Yard Mala Krsna – Belgrade Marshalling Yard Mala Krsna – Smederevo ¹⁾ Mala Krsna – Ostružnica – Ruma Mala Krsna – Pančevo Main St.	1) in both directions
NIŠ MARSHALLING YARD	Niš Marshalling Yard - Lapovo Marshalling Yard Niš Marshalling Yard - Preševo Niš Marshalling Yard - Dimitrovgrad Niš Marshalling Yard - Zaječar Niš Marshalling Yard – Kuršumlija ¹⁾	1) in both directions
NOVI SAD MARSHALLING YARD	Novi Sad Marshalling Yard- Belgrade Marshalling Yard Novi Sad Marshalling Yard- Subotica ter. 1) Novi Sad Marshalling Yard- Bogojevo Novi Sad Marshalling Yard- Tomaševac-Pančevo Main St. Novi Sad Marshalling Yard- Zrenjanin Novi Sad Marshalling Yard- Ruma Novi Sad Marshalling Yard- Temerin ²⁾ Novi Sad Marshalling Yard- Podbara ²⁾	Tomaševac station takes over certain operations of distribution station 1) during the continuous closure of Novi Sad – Subotica line section there will be no operation of freight trains 2) in both directions
PANČEVO MAIN STATION	Pančevo Main St. – Tomaševac - Zrenjanin Pančevo Main St Vršac Pančevo Main St Belgrade Marshalling Yard Pančevo Main St. – Tomaševac- Novi Sad Marshalling Yard Pančevo Main St. – Resnik – Lapovo Marshalling Yard Pančevo Main St. – Pančevo Vojlovica ¹⁾ Pančevo Main St. – Mala Krsna Pančevo Main St. – (Mala Krsna) – Lapovo	Tomaševac station takes over certain operations of distribution station 1) in both directions 2) for the trains not entering the Mala Krsna station



	Marshalling Yard ²⁾	
	Pančevo Main St. – Resnik - Požega	
	Traffic is temporarily regulated by UNMIK	
PEĆ	railways	
DOŽA DEWA C	Požarevac – Bor Freight St.	
POŽAREVAC	Požarevac – Mala Krsna	
	Požega - Belgrade Marshalling Yard	
POŽECA	Požega - Kraljevo	
POŽEGA	Požega - Prijepolje Freight St.	
	Požega -Resnik – Pančevo Main St.	
PRAHOVO	Prahovo pristanište - Zaječar	
PRISTANIŠTE	Prahovo pristanište - Bor Freight St.	
•	Preševo - Niš Marshalling Yard	
PREŠEVO	Preševo - Tabanovce (IŽRSM)	
	Prijepolje Freight St Vrbnica -	1) for the trains not entering
PRIJEPOLJE FREIGHT	Bijelo Polje (ŽICG)	the Požega station
STATION	Prijepolje Freight St. – Požega	
	Prijepolje Freight St. – (Požega) ¹⁾ - Kraljevo	
	Traffic is temporarily regulated by UNMIK	
PRIZREN	railways	
	Ruma - Ostružnica - Lapovo Marshalling Yard	
	Ruma – Ostružnica – Mala Krsna	
	Ruma - Novi Sad Marshalling Yard	
RUMA	Ruma - Belgrade Marshalling Yard	
Kelvin	Ruma - Šabac	
	Ruma – Brasina	
	Ruma – Šid	
ROSZKE (MAV ZRT)	Roszke (MAV ZRT) - Horgoš - Subotica	
	Senta – Subotica Freight St.	
SENTA	Senta - Zrenjanin	
	Senta - Kikinda	
	Sombor - Subotica Freight St.	
SOMBOR	Sombor - Bogojevo	
	Sombor – Vrbas ¹⁾	1) in both directions
STAMORA MORAVITA	Stamora Moravita (CFR SA) – Vršac	-,
(CFR SA)	(0111 212)	
, ,	Subotica Freight St Novi Sad Marshalling	1) During the continuous
	Yard ¹⁾	closure of Novi Sad –
	Subotica teretna - Senta	Subotica line section, there
	Subotica teretna - Sombor	will be no operation of freight
SUBOTICA FREIGHT	Subotica teretna – Horgoš - Roszke (MAV	trains
STATION	ZRT)	2) For the trains not entering
	Subotica Freight St. – (Senta) – Kikinda ²⁾	the Senta station
	Subotica Freight St. – (Senta) – Zrenjanin ²⁾	
TABANOVCE (IŽRSM)	Tabanovce (IŽRSM) - Preševo	
TOVARNIK (HŽI)	Tovarnik (HŽI) - Šid	
ĐENERAL JANKOVIĆ	Traffic is temporarily regulated by UNMIK	
	railways	
ŠABAC	Šabac - Ruma	
ŠID	Šid - Ruma	



Sid - Tovarnik ((HŽI)	

There are four marshalling yards on the network where most of the freight trains are formed and split-up, and these stations are at the same time the distribution stations: Belgrade Marshalling Yard, Lapovo Marshalling Yard, Niš Marshalling Yard and Novi Sad Marshalling Yard.

Due to the limited track capacities and the work organization, the train formation and splitting-up is **not permitted** at the following distribution stations: **Bogojevo**, **Dimitrovgrad**, **Preševo**, **Brasina**, **Šid**, **Mala Krsna and Zrenjanin**. The exception is Šid station where the formation of international freight trains and domestic feeder trains can be performed on the designated industrial sidings. The formation of trains at distribution stations Šabac and Požarevac can be performed only if these stations are loading/unloading stations for such trains.

Splitting up and formation of trains are also permitted at particular intermediate stations having the required track capacities: Velika Plana, Zrenjanin fabrika, Kragujevac, Kruševac, Radinac, Smederevo, Sremska Mitrovica, Crveni Krst and Čačak.

The following intermediate stations may also be the departure/terminal stations provided that they are at the same time the loading/unloading stations for such train: Adrovac, Aleksinac, Batočina, Valjevo, Vreoci, Despotovac, Doljevac, Dragačevo, Elemir, Zvornik, Inđija, Jagodina, Kaona, Lazarevac, Majdanpek, Odžaci, Pančevo Varoš, Pančevo Vojlovica, Paraćin, Petrovac Gložan, Pirot, Podbara, Prahovo, Prokuplje, Raška, Ristovac, Svilajnac, Svrljig, Stara Pazova, Surčin, Užice Freight St.. The restriction relating to these stations also prescribes that it is not permitted to leave and gather wagons for the purposes of forming other trains.

If the RU requests that the departure/terminal station is the intermediate station that has not been listed, such requests will be considered separately and decisions will be made on such requests depending on the available infrastructure capacities and organization possibilities at the moment of the request submission.

Passenger train formation yards

Dispatching of passenger trains with classical units formed in the technical-passenger station Zemun is possible in Belgrade Center and Zemun stations. In Zemun station track No 11 is equipped with the ramp for loading and unloading of accompanied cars.

The dispatching stations for the EMU and DMU trains can be all stations for passenger traffic, depending on the available capacities and the traffic service hours.

Overview of distribution stations-sections for passenger trains operation

Distribution station	Distribution section	Comments
1	2	3
BEOGRAD CENTAR	Beograd Centar – Novi Sad	
	Beograd Centar – Ruma	
	Beograd Centar – Pančevo Main St.	
	Beograd Centar - Požega	
	Beograd Centar - Lapovo	
BIJELO POLJE (ŽICG)	Bijelo Polje (ŽICG) - Vrbnica - Prijepolje freight station	
BOGOJEVO	Bogojevo - Sombor Bogojevo - Novi Sad	



	Bogojevo - Erdut (HŽI)	
VRŠAC	Vršac - Pančevo Main St.	
VRSAC	Vršac - Stamora Moravita (CFR SA)	
ERDUT (HŽI)	Erdut (HŽI) – Bogojevo	
DIMITROVGRAD	Dimitrovgrad – Niš	
JIMBOLIA (CFR)	Jimbolia (CFR SA) - Kikinda	if applicable
	Zaječar – Niš	
ZAJEČAR	Zaječar - Prahovo Pristanište	
	Zaječar – Požarevac	
ZVORNIK	Zvornik – Šabac - Ruma	if applicable
	Zrenjanin - Kikinda	
ZRENJANIN	Zrenjanin - Novi Sad ¹⁾	1) if applicable
Zitertoritt	Zrenjanin - Pančevo Main St. ¹⁾	
	Zrenjanin - Senta	
KIKINDA	Kikinda - Jimbolia (CFR SA)	
	Kikinda - Zrenjanin	
	Kikinda - Senta	
	Kraljevo – Kosovska Mitrovica Sever ¹⁾	1) in both directions
KRALJEVO	Kraljevo - Lapovo	
	Kraljevo - Požega Kraljevo - Stalać ¹⁾	
	Lapovo – Belgrade Center	
	Lapovo - Beigrade Center Lapovo - Kraljevo	
LAPOVO	Lapovo - Niš	
	Lapovo - Smederevo	
	Niš - Lapovo	
	Niš - Preševo	
NIŠ	Niš - Dimitrovgrad	1) in both directions
	Niš – Zaječar	,
	Niš - Kuršumlija ¹⁾	
	Novi Sad – Beograd Centar	
	Novi Sad – Subotica1)	1) During the
	Novi Sad – Bogojevo	continuous of closure
NOVI SAD	Novi Sad – Vrbas ¹⁾	of Novi Sad –
2.0.2.222	Novi Sad - Pančevo Main St.	Subotica line section,
	Novi Sad – Zrenjanin Novi Sad - Ruma	train traffic will not
	1 NOVI Sau - Kuilla	be organized
	Pančevo Main St Zrenjanin	
PANČEVO MAIN STATION	Pančevo Main St Vršac	1) in both directions
		,
	Pančevo Main St. – Beograd Centar	
	Pančevo Main St Pančevo Vojlov. 1)	
	Pančevo Main St. – Novi Sad ²⁾	2) if applicable
	Požarevac - Lapovo	
POŽAREVAC	Požarevac - Smederevo	
IOLANETAC	Požarevac - Zaječar	
	Požarevac – Beograd Centar	
	Požega - Beograd Centar	
POŽEGA	Požega - Kraljevo	
- 0	Požega - Prijepolje freight station	1) 1 1 1 1 1
BD MOVO BDIOS ANTOS	Požega – Užice ¹⁾	1) in both directions
PRAHOVO PRISTANIŠTE	Prahovo pristanište - Zaječar	



PRIJEPOLJE FREIGHT STATION	Prijepolje freight station - Vrbnica - Bijelo Polje (ŽICG)	
PREŠEVO	Prijepolje freight station - Požega Preševo - Niš Preševo - Tabanovce (IŽRSM)	
RUMA	Ruma - Šabac - Zvornik Ruma - Šid Ruma - Beograd Centar Ruma – Novi Sad	
ROSZKE (MAV ZRT)	Roszke (MAV ZRT)-Horgoš- Subotica	
SENTA	Senta – Subotica Senta – Zrenjanin Senta – Kikinda ¹⁾	1) in both directions
SMEDEREVO	Smederevo - Lapovo Smederevo - Požarevac	
SOMBOR	Sombor - Subotica Sombor - Bogojevo	
STAMOR MORAVITA (CFR SA)	Stamora Moravita (CFR SA) - Vršac	
SUBOTICA	Subotica - Novi Sad 1 ⁾ Subotica - Sombor Subotica - Horgoš - Roszke (MAV)	1) During the continuous of closure Novi Sad – Subotica line section, train traffic will not be organized
TABANOVCE (IŽRSM)	Tabanovce (IŽRSM) - Preševo	
TOVARNIK (HŽI)	Tovarnik(HŽI) - Šid	
ŠABA CŠabac - Rum		
ŠID	Šid – Ruma Šid – Tovarnik (HŽI)	

7.3.5 Storage Sidings

IŽS network has the capacities for storing of rolling stock. Rolling stock storing services are provided by the IŽS

Storing of standard passenger train sets, DMUs, EMUs and locomotives is carried out at all depots for accommodation and storing of rolling stock of "Srbija Kargo" JSC and "Srbija Voz" JSC.

Storing of freight wagons is carried out on special storage sidings for surplus freight wagons at marshalling yards Belgrade Marshalling Yard, Novi Sad Marshalling Yard, Niš Marshalling Yard, Lapovo Marshalling Yard, Subotica, Zaječar, Kikinda, Kraljevo, Pančevo Main St., Požega, Ruma and Sombor.

IŽS is not responsible for any damage which can occur on the rolling stock, that is, on the goods which is located in the stored wagons.

"Infrastructure of Serbian Railways" provides the service of storing of rolling stock to all interested railway undertakings which require storing of rolling stock, in a non-discriminatory manner and upon their request, and to the extent permitted by the infrastructure capacities.



7.3.6 Maintenance facilities

There are rolling stock maintenance facilities on IŽS network, but the maintenance services are not provided by "Infrastructure of Serbian Railways" JSC. Appendix 3.10. contains the details on the rolling stock maintenance facilities.

7.3.7 Other Technical Facilities, including Cleaning and Washing Facilities

"Infrastructure of Serbian Railways" provides the following basic services at technical facilities to railway undertakings in a non-discriminatory manner and upon their request:

Use of wagon scales in stations, where available, according to table 8 of this document;

- Fixed facilities for test braking in station Beograd Ranžirna (Belgrade Marshalling Yard);
- Use of freight loading/unloading ramp;
- Use of ramp for loading and unloading of accompanied cars;
- Use of loading clearance;
- Use of portal crane in Aleksinac station;

The need for using the basic services listed in bullets 1, 3, 4 and 5 must be presented by railway undertakings in the capacity allocation process, whereas the need for other services can be presented in a separate request.

More detailed information on provision of the above stated basic services can be obtained at:

"Infrastructure of Serbian Railways" JSC Traffic Department 6, Nemanjina St 11000 Belgrade, Serbia

Tel.: +381 11 3618 214 Fax: +381 11 3616 814 E<u>-mail: sektor.sp@</u>srbrail.rs

"Infrastructure of Serbian Railways" does not have the special facilities and does not provide the services of rolling stock cleaning and washing.

Wagon scales

The list of stations in which are located wagon scales is given in the Table 8.

Table No. 8: Wagon scales

No.	Station	Carrying Capacity (t)	Length of weigh bridge (m)	NOTE:
1	Šid	100	20	Wagon scale is electronic.
2	Novi Sad Marshalling Yard	100	20	Wagon scale is electronic.
3	Pančevo main st.	100	20	Wagon scale is electronic.
4	Vršac	100	20	Wagon scale is electronic.
5	Zrenjanin Factory	100	20	Wagon scale is mechanic.
6	Subotica Freight St.	100	20	Wagon scale is electronic.
7	Sombor	100	20	Wagon scale is mechanic.
8	Niš Marshalling Yard	100	20	Wagon scale is electronic.
9	Požega	100	20	Wagon scale is electronic.
10	Čačak	80	15.5	Wagon scale is electronic.
11	Lapovo Marshalling St.	100	20	Wagon scale is electronic.



12	Belgrade Marshalling Yard	100	18	Wagon scale is electronic.
13	Dimitrovgrad	100	20	Wagon scale is electronic.

Fixed installations for brake control

Fixed installations for brake control are located at Beograd Marshalling Yard.

Cleaning and washing facilities

IŽS does not have special facilities for cleaning and washing of railway vehicles. The type, volume and place of cleaning of railway vehicles for passenger service are determined by the railway undertaking.

Other technical facilities

- Ramps for loading and unloading of the load

"Infrastructure of Serbian Railways" JSC will enable usage of the ramps for loading and unloading of the load to all railway undertakings on the non-discriminatory way and upon their request. The need for usage of the ramps for loading and unloading of the load must be shown by the railway undertakings' in the capacity allocation procedure.

- Ramps for loading and unloading of the accompanied vehicles

Loading/unloading ramps for transport of accompanied vehicles are located in stations Zemun, Novi Sad, Subotica and Niš. The need for usage of the ramps for loading and unloading of the accompanied vehicles must be indicated by the railway undertakings in the capacity allocation procedure.

- Loading gauge

Loading gauges that are in function are present at the following stations: Novi Sad Marshalling Yard, Vršac, Čačak, Požega, Dimitrovgrad, Jošanička Banja and Kragujevac.

On IŽS network there are more stations with loading gauges which are not in function currently. The correction of the list of loading gauges will be done upon putting malfunction loading gauges into the functional condition.

- Crane portal in Aleksinac station

Transfer station on the territory of IŽS is Aleksinac. Mobile portable crane PD 86 with capacity up to 32 t is used for transshipmenthipment.

Service for using of wagon scales

"Infrastructure of Serbian Railways" JSC provides the wagon scales services. The price for using the wagon scale amounts to 3,309.00 RSD/wagon without VAT.

Service of loading and unloading using the portal crane in Aleksinac station

The service of loading and unloading using the portal crane together with the staff of public railway Infrastructure Manager is defined by means of a separate contract concluded between the public railway Infrastructure Manager and the Railway Undertaking, i.e. the user of the said service.

Unit price for the use of portal crane for loading and unloading amounts to 150,00 RSD/net tonne of goods VAT exclusive.

IŽS is providing other basic services if required by the railway undertaking and subject to a special contract. Other basic services that can be provided are:

• manning of facilities

Manning of unmanned service points

Structure of manning of non-manned service points, upon the railway undertaking's request, consists of:



- manning of service points of public railway infrastructure manager upon the railway undertaking's request in function of traffic management or shunting movements in such service points outside the working hours for such service point, and
- manning of service points of the railway undertaking upon its request in function of traffic management or shunting movements in such service points because the railway undertaking does not possess adequate traffic staff.

Charge for manning of service points by traffic staff amounts to:

Work place	Train dispatcher	Switch operator
Price in RSD/hour VAT exclusive	1.236,00	955,00

Calculation for periods of manning of non-manned service points starts from the moment of takeover of service at the service point until the moment of handover of service for the purposes of train operation i.e. shunting movement of railway undertaking's train set, and in case of temporarily manned stations (station working hours with interruption) not taking into account the period when the station is manned during the working hours according to the timetable booklet.

In the stations where it is necessary to perform manning with the train dispatcher and the switch operator, the manning period is the same for both employees given the responsibility of both worker during the setting up of a train route.

7.3.8 Maritime and Inland Port Facilities

The following ports are connected to public railway network:

- Port area Novi Sad

Operator: DP World AD Novi Sad, www.lukanovisad.rs

Information on the service facility are available at https://www.dpworld.com/en/serbian/general-terms-and-conditions

- Port area Smederevo

Operator: HBIS GROUP Serbia Iron & Steel d.o.o. Beograd, www.hbisserbia.rs

- Port area Pančevo

Operator: Port "Dunav" AD Pančevo

Granexport d.o.o.www.granexport.rs

Specijalna luka d.o.o.

Information on the service facility are available at www.specijalnaluka.rs

- Port area Prahovo

Operator: PD Elixir Prahovo, https://www.elixirprahovo.rs

Information on the service facility are available at www.elixirprahovo.rs/logistika and www.elixirgroup.rs/usluge/logistika/luka-prahovo/

- Port area Senta

Operator: Port Senta A.D.,

Information on the service facility are available at www.luka-senta.rs

- Port area Sremska Mitrovica

Operator: RTC Luka Leget AD, https://www.leget.rs

- Port area Šabac

Operator: PD Elixir Zorka



Information on the service facility are available at https://www.elixirzorka.rs and www.elixirgroup.rs/usluge/logistika/luka-sabac/

7.3.9 Relief Facilities

IŽS has on its disposal a mobile relief facility – relief (auxiliary) train. The services of relief train in cases of remedying the consequences of accidents or incidents are provided by IŽS, using its relief trains and staff, located in Belgrade, Niš and Kraljevo. In order to use the relief train services, a Railway Undertaking must address IŽS in writing:

Center for relief train operations

6, Nemanjina St

11 000 Belgrade, Serbia Tel: +381 11 3620 899 Fax: +381 11 3620 899 Email: direktor.tkp@infrazs.rs

Eman. direktor.tkp@mirazs.rs

Price of services regarding the provision of relief assistance

The price for providing the basic service regarding the provision of relief assistance is determined based on the actual costs incurred during the provision of such service and it is applied in a non-discriminatory manner for all railway undertakings.

The price of transporting the relief train from the domicile station to the place of work and return to the domicile

No	Means of transport	Measuring unit	Price in RSD, VAT exclusive
1	Traction vehicle - locomotive of the operator – in operation, maneuver or expectation of operation		According to the operators bill
2	Vehicle of the working unit (ZOP, ETP, SP,) within "IŽS" – trolley, truck, etc.		According to the account of the working unit "IŽS" which performed transport
3	GEISMAR road-rail vehicle type V2R-730-S – road driving	hour	15.156,00
4	GEISMAR road-rail vehicle type V2R-730-S – railway driving	hour	18.156,00
5	Traction vehicle – locomotive "IŽS" or locomotive leased (locomotive operation + staff operation + energy) -in operation	hour	41.000,00
	-in expectation of operation	hour	15.000,00

Price for equipment and tools for the operation of relief (auxiliary) train

No	Asset description	Type of work	Measu ring unit	Price in RSD, VAT exclusive
1	Relief train	Expecting of work	hour	2.000,00
2	Relief train	Work on preparation and retrieval of intervention equipment	hour	4.000,00
3	GEISMAR road-rail vehicle type V2R-730- S	Work during intervention	hour	15.156,00



4	Jack EDK 1000 (99 72 9 471 001-4)	Expecting of work	hour	5.000,00
5	Jack EDK 300 (99 72 9 471 101-2)	Expecting of work	hour	5.000,00
6	Jack DHPD 65 (99 72 9 571 001-3)	Expecting of work	hour	5.000,00
7	Jack EDK 1000 (99 72 9 471 001-4)	Preparation, Work, Retrieval	hour	56.970,00
8	Jack EDK 300 (99 72 9 471 101-2)	Preparation, Work, Retrieval	hour	27.248,00
9	Jack DHPD 65 (99 72 9 571 001-3)	Preparation, Work, Retrieval	hour	30.146,00
10	LUKAS equipment	Preparation, Work, Retrieval	hour	7.066,00
11	WALTER trolley	Installation and removal	hour	6.000,00
12	WALTER trolley	Transport	hour	3.320,00
13	WALTER trolley	Remaining of trolley under the rolling stock – lump sum	hour	600,00
14	Stable power generation unit	Work	hour	2.400,00

Note: operating time is calculated in full hours – each started working hour of equipment and assets is counted as a full working hour.

Labour costs for relief train's staff

No	Type of work	Measur ing unit	Price in RSD VAT exclusive
1	Assistant on relief train	hour	704,00
2	Electromechanic	hour	981,00
3	Driver and operator of a two-way motor vehicle	hour	1.016,00
4	Rail crane operator	hour	1.027,00
5	Hydraulic equipment operator	hour	1.027,00
6	Locksmith on the relief train	hour	1.027,00
7	Rail vehicle mechanic	hour	1.027,00
8	Relief train manager	hour	1.126,00
9	Expert associate for circuit inspection	hour	1.175,00
10	Assistant relief train chief	hour	1.282,00
11	Relief train chief	hour	1.605,00
12	Employees participating in the work of relief train	pcs	1.800,00

Note: operating time is calculated in full hours – each started working hour is counted as a full working hour.

7.3.10 Refuelling Facilities

"Infrastructure of Serbian Railways" JSC is providing the services of fuel storing and issuing for refuelling of traction vehicles of all railway undertakings.

This relates to refuelling facilities at service points – stations and depots:

Pančevo main St., Lapovo, Kraljevo, Požarevac, Požega, Sombor, Kikinda, Belgrade Marshalling Yard, Crveni Krst, Ruma, Zaječar, Zrenjanin, Vršac and Subotica.

Detailed information on the services of fuel storing and issuing for refuelling of traction vehicles are available at:



Department for Procurement and Central Warehousing 6, Nemanjina St 11 000 Belgrade, Serbia

Tel: +381 11 3620 094

Email: <u>nabavke.infra@srbrail.rs</u>

Price for the service of storing and refuelling

The price for the service of fuel storing and issuing for the purposes of refuelling of traction vehicles of all railway undertakings is determined based on the actual costs incurred during the provision of this service and is applied in a non-discriminatory manner for all railway undertakings.

The service of fuel storing and issuing for the purposes of refuelling of traction vehicles amounts to 5.43 RSD per stored litre of diesel fuel VAT exclusive.




81

APPENDICES

- 1. Organizational chart of "Infrastructure of Serbian Railways" JSC
- 2. Internal regulations (documents) and technological procedures
- 3.1 Loading gauge JŽ I
- 3.2 Loading gauge UIC-GA
- 3.3 Loading gauge UIC-GB
- 3.3a Loading gauge UIC-GC
- 3.4 Electrified lines
- 3.5 Power supply facilities
- 3.6 Overview of signalling & safety devices equipping level
- 3.7 Overview of telecommunication devices equipping level
- 3.8 List of stations with industrial sidings on which it is possible to handle dangerous goods (RID goods)
- 3.8 b List of service points where it is possible to perform transshipment of dangerous goods
- 3.9 Alternative transport routes
- 3.10 Facilities for rolling stock maintenance
- 3.11 Railway infrastructure development projects
- 4.1 Request for train path allocation (form)
- 4.2 Instructions for completion of Request for train path allocation (form)
- 4.3 Deadlines for annual 2023/2024 Timetable preparation
- 4.4 Deadlines for amendment of annual 2023/2024 Timetable
- 5.1. Overview of railway lines on which train running is possible when they are manned only with engine driver
- 5.2. Overview of the lines fulfilling the conditions for train running with an engine driver only
- 5.3. Geometry of pantograph (current collector) TYPE POS 254/III used on IŽS network
- 6. Register of infrastructure data
- 7. Overview of primary train delay causes
- 8. Overview of platforms and arranged surfaces in service points
- 9. Method for calculation of electricity consumption for train traction
- 10. Railway node boundaries



Appendix 1: Organizational chart of "Infrastructure of Serbian Railways" JSC

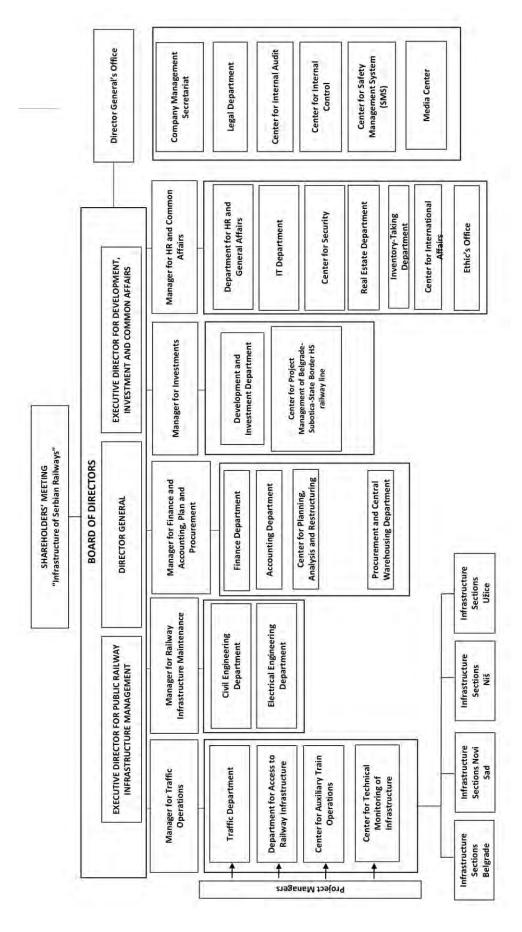



Appendix 2: Internal regulations (documents) and technological procedures


The internal regulations (documents) and the technological procedures applied by IŽS are listed in the Registry of regulations of importance for traffic safety i.e. in item 1.3 Internal general regulations of "Infrastructure of Serbian Railways" JSC.

The registry of regulations of importance for traffic safety is published on the web site of "Infrastructure of Serbian Railways" JSC in section About us/Library/Regulations/Safety Management System/Appendices to the Safety Management System Rules of Operation/Appendix 12.1 Library- Registry of regulations (О нама/Библиотека/Правиници/Систем управљања безбедношћу/Прилози Пословника система управљања безбедношћу/ Прилог 12.1 Библиотека-Регистар прописа).

Available on link https://infrazs.rs/izs-osnovni-podaci/biblioteka




Appendix 3.1. Loading Gauge ŽS I

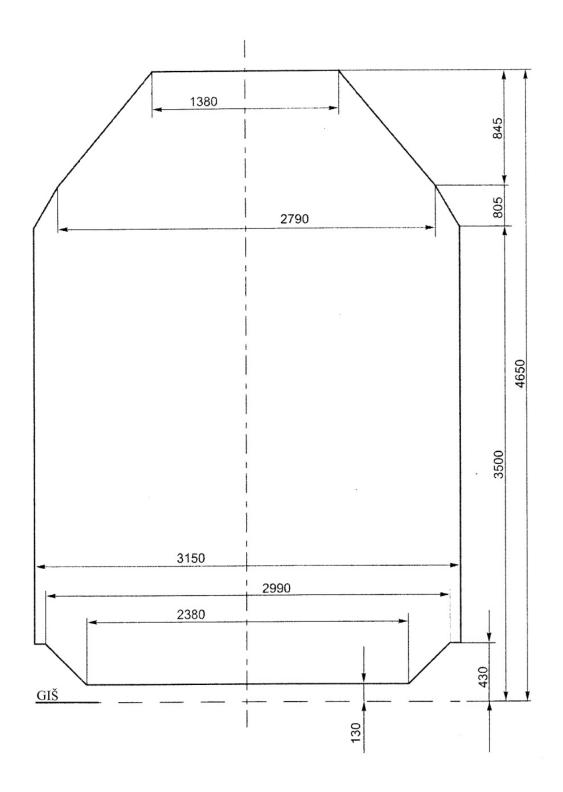




Appendix 3.2. Loading Gauge UIC-GA

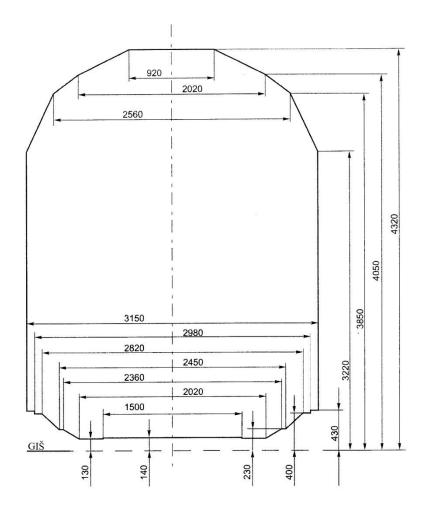




Appendix 3.3. Loading Gauge UIC-GB

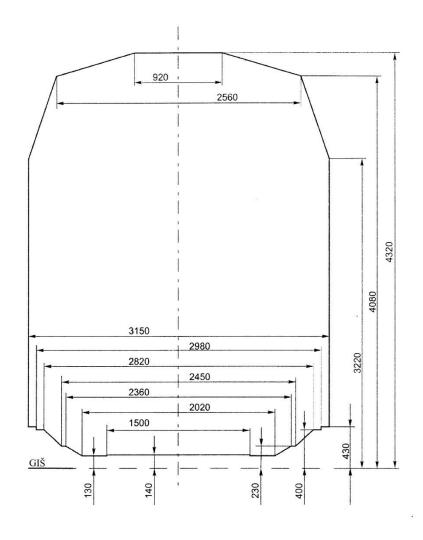



Appendix 3.3a Loading Gauge UIC-GC

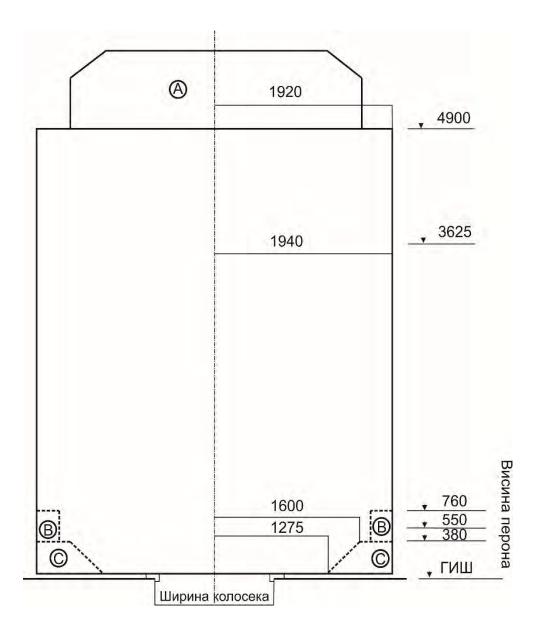

A – Pantograph movement space



B – Area for positioning of platforms according to leaflet UIC 505-4, for the speeds of up to 200 km/h

C – Possibility of reserving the space for low platforms and specific installations

Appendix 3.4. Electrified lines

Main lines:

- 1. Beograd Centar Stara Pazova Šid State Border (Tovarnik)
- 2. Beograd Centar Rasputnica G Rakovica Mladenovac Lapovo Niš Preševo State Border (Tabanovce)
- 3. (Beograd Centar) Rakovica Jajinci Mala Krsna Velika Plana
- 4. (Jagodina) Rasputnica Ćuprija Ćuprija Paraćin
- 5. (Beograd Centar) Stara Pazova Novi Sad Subotica State Border (Kelebia)
- 6. Niš Dimitrovgrad State Border (Dragoman):
 - electrified on section Dimitrovgrad State Border
- 7. Beograd Centar Pančevo Main St. Vršac State Border (Stamora Moravita):
 - electrified on section Beograd Centar Pančevo varoš
- 8. (Beograd Centar) Resnik Požega Vrbnica State Border (Bijelo Polje)
- 9. Beograd Marshalling yard "A" Ostružnica Batajnica
- 10. Beograd Marshalling yard "B" Ostružnica
- 11. Beograd Marshalling yard "A" Rasputnica "B" Rasputnica "K/K1" Resnik
- 12. Ostružnica Rasputnica "B" (Rasputnica "K/K1")
- 13. Beograd Marshalling yard "B" Rasputnica "R" Rasputnica "A" (Resnik)
- 14. (Beograd Marshalling yard "B") Rasputnica "R" Rakovica
- 15. Beograd Marshalling yard "A" Rasputnica "T" Rakovica
- 16. Beograd Marshalling yard "B" Rasputnica "T" (Rakovica)
- 17. connecting track in the area of Rasputnica "K/K1": (Rasputnica "B") skretica "K" skretnica "K1" (Jajinci)
- 18. (Rasputnica Pančevački most) Rasputnica Karađorđev park Rasputnica Dedinje (Rasputnica G)
- 19. Inđija Golubinci
- 20. Novi Sad Novi Sad Marshalling yard Rasputnica Sajlovo
- 21. bypass track of station Mala Krsna: (Kolari) branching turnout 1 branching turnout 28 (Osipaonica)
- 22. Rasputnica Lapovo Varoš Lapovo Marshalling yard Lapovo
- 23. Trupale Niš Marshalling yard Međurovo
- 24. Crveni krst Niš Marshalling vard
- 25. Niš Rasputnica most (Niš Marshalling yard)

Regional lines:

- 1. Topčider Putnička (4+195) Rasputnica G Rakovica³
- 2. Novi Sad Odžaci Bogojevo:
 - > electrified on section Novi Sad Sajlovo
- 3. Stalać Kraljevo Požega:
 - electrified on section Kraljevo Požega
- 4. connecting track to station Požega: (Uzići) branching turnout No 53 branching turnout No 54 (Dragačevo)
- 5. Smederevo Rasputnica Jezava Radinac Mala Krsna
- 6. Mala Krsna Bor Rasputnica 2 (Vražogrnac):
 - ➤ electrified on section Mala Krsna Požarevac
- 7. Subotica Horgoš State Border (Röszke)

³ By virtue of the Conclusion of the Government of the Republic of Serbia No 340-2989/2022 dated April 7th, 2022, the Decision of Joint Stock Company for Public Railway Infrastructure Management "Infrastructure of Serbian Railways" Belgrade on termination of railway traffic, dismounting and reconstruction of infrastructure capacities on Topčider Putnička (km 4+195 – Junction "G" – (Rakovica), has been approved.



_

Local lines:

- 1. Novi Sad Novi Sad ložionica:
 - > electrified on section Novi Sad Blok 3 Novi Sad
- 2. Pančevo Varoš Pančevo Vojlovica



Appendix 3.5 Power supply facilities

No	Facilities	Chainage
	ne 101 Beograd Centar – Stara Pazova – Šid – State Border– (Tovarnik)	
1.	EVP Zemun	009+671
2.	PSN Batajnica	021+735
3.	PS Stara Pazova	035+000
4.	EVP Inđija	043+015
5.	PS Putinci	053+600
6.	PSN Ruma	066+245
7.	PS Sremska Mitrovica	081+700
8.	EVP Martinci	094+200
9.	PS Kukujevci	105+000
10.	PS Šid	116+400
	ine 102 Beograd Centar – Mladenovac – Lapovo – Niš – Preševo	
(Tabano		
11.	PSN Košutnjak	007+726
12.	PS Rakovica	008+656
13.	PS Kijevo	010+128
14.	EVP Resnik	014+020
15.	PS Klenje	024+800
16.	PSN Ralja	032+340
17.	PS Sopot Kosmajski	041+565
18.	EVP Mladenovac	053+100
19.	PS Glibovac	074+000
20.	PSN Mala Plana	084+350
21.	PS Plana	089+700
22.	EVP Markovac	099+345
23.	PS Lapovo Varoš	106+309
24.	PS Lapovo Putnička	109+207
25.	PSN Bagrdan	119+122
26.	EVP Jagodina	136+262
27.	PS Ćuprija	148+200
28.	PS Paraćin	154+971
29.	PSN Sikirica	165+025
30.	PS Stalać	176+154
31.	PS Braljina	186+600
32.	EVP Đunis	195+130
33.	PS Korman	205+540
34.	PS Aleksinac	214+077
35.	PSN Grejač	223+479
36.	PS Trupale	234+104
37.	PS Niš	243+287
38.	EVP Niš	248+755
39.	PS Doljevac	261+410
40.	PSN Pečenjevce	276+752
41.	PS Leskovac	287+910
42.	EVP Grdelica	300+580
43.	PS Džep	319+561
44.	PSN Suva Morava	332+860
45.		347+765
	PS Vranjska Banja	
46.	EVP Ristovac	365+370
47.	PS Bukarevac	386+617



48.	PSN Tabanovci	400+060
Main		ana
49.	PS Beli Potok	017+800
50.	PSN Vrčin	026+400
51.	PS Mali Požarevac	042+800
52.	EVP Vodanj	056+700
53.	PS Mala Krsna	070+600
54.	PSN Lozovik	086+000
	Line 105 (Beograd Centar) – Stara Pazova – Novi Sad – Subotica – State	
55.	PS Indija	042+230
56.	PSN Beška	051+880
57.	PS Sremski Karlovci	066+480
58.	PS Novi Sad	077+670
59.	EVP Novi Sad	081+0209
60.	PS Kisač	091+602
61.	PSN Zmajevo	105+045
62.	EVP Vrbas	120+135
63.	PS Lovćenac	127+824
64.	PSN Bačka Topola	142+745
65.	PS Žednik	157+926
66.	EVP Naumovićevo	168+590
67.	PS Subotica	177+262
68.	PSN Kelebija	184+398
	Line 107 Beograd Centar – Pančevo Main St. – Vršac – State Border– (St.	
69.	PS Beograd Centar	000+000
70.	PS Pančevački Most	004+687
	Line 108 (Beograd Centar) – Resnik – Požega – Vrbnica – State Border–	
71.	PS Barajevo	015+420
72.	PSN Stepojevac	029+610
73.	PS Lazarevac	045+310
74.	EVP Slovac	059+248
75.	PS Valjevo	077+905
76.	PSN Lastra	093+056
77.	PS Ražana	111+239
78.	EVP Kosjerić	118+229
79.	PS Požega	140+420
80.	PSN Uzići	150+295
81.	PS Užice – teretna	162+319
82.	EVP Sušica	178+379
83.	PS Zlatibor	193+407
84.	PSN Jablanica	206+350
85.		
	PS Priboj EVP Bribojska Pania	225+338
86.	EVP Pribojska Banja	232+750
87.	PS Bistrica PSN Prijanalia	241+248
88.	PSN Prijepolje PS Lučica	257+226
89.		264+695
90.	EVP Brodarevo	273+360
91.	PS Vrbnica	285+096
	Line 111 Beograd Marshalling yard "A" – Ostružnica – Batajnica	001+200
92.	PS Železnik – ulaz	001+290
93.	PS Železnik – izlaz	002+615



94.	PSN Surčin	013+485
Regiona	l Line 213 Stalać – Kraljevo – Požega	
95.	EVP Kraljevo	080+565
96.	PSN Ovčar Banja	120+900
	Regional railway line 201 Subotica – Horgoš – State Border – (Röszke)	
97.	PS Bački Vinogradi	15+717

Remote	control centers	
98.	Centar DU Beograd	M2: 005+145
99.	Centar DU Niš	M2: 243+560
100.	Centar DU Novi Sad	M4: 078+038

Abbreviations:

EVP - Electric traction substation

PSN - Track sectioning post with neutral line

PS - Track sectioning post

CDU - Remote control center



Appendix 3.6 Overview of signaling & safety devices equipping level

_	1	Т	_	_	-	+	_		_					_	_		_		_	_	_	_	_	_		_			Т		-	_		_	П	Т	_	_	_	+	_	—	_
	Asnual positioning of furnouts on the fund	24	+ 7			\downarrow														\prod																			L				
g yards	Ccentral positioning of turnout	23	67																																								
Devices in marshalling yards	Automatic positioning of grand and an inc tuoring	22	77													55																						İ					
Devices	Marshalling yards without automatic marshalling	21	7.7													-												2	ļ.	-													
	Marshalling yards with gailledrawa gailledrawa zibemotus	20 00	0.7																										П									Ī					
Signal equipped	A Mechanicalsignal	10	12																																			I					
Signal	Engis Ingiz Idgid	18	91	363	coc	170	187		111	203			9	2 =	2	9	2	2	2		9	9	2			4		2	14 -	4													
	Mechanical signal	17	1.1				2	20			30	91								Ц												4	20	5	٥	0	11	Ţ	6		11		
al type	2 lengis ingil	161810	217	106	2 1	66	73	8	103	177	12	13	2	٥ –	Ц	4	2	1	-	-			Ц		3	4	- 4		28	2	m	1	Ξ	8	t	`	4	-	14	:	43		
Signal	Mechanical signal	15	2	L	4	+	2	20	19		37	49	Ц	\downarrow	Ц		Ц		\downarrow	Ц	\perp		Ц				Ц		Ц	Ц		=	26	7	٥	٠	=	1	10	1	Ξ		
Ľ	ingis idgi d	14	182	410	+ 12	160	292	25	113	307	20	18	9	21	2	9	2	2	2	Ц	9	9	2		9	4	- =	2	48	0	4		17	91	,	2	∞	1	23	3	64		
out heating	Gas	13	CT			1																															_	1	L				
Tumo	Electrical Electrical	12	40	196	130	79	82		79	104						-						3				2			ю-	-	m						_	1	_				
A	On-site control and interlocking by	1	11	180	100		138		87		247	83				15									39+6		77		36			27	253	32	9	66	73	2	92	*	195		
erlocking	On-site control and interlocking by means of electrical controller	10	OT				25																						Ц								_	1	L				
Turnout int	Central control desk and interlocking by means of mechanical devices	o isominori oi					4		∞			63																				4		7			«						
1	Central control desk and interlocking by means of electrical positioning devices	×	341	630	660	151	171		116	306	91	19		32	2				-	3	132	3				4			44	100	4		7	19	c	,			8	•	22		
Ι.	Mechanical devices without signal- turnout dependence	7	7				1	9	5		15		T	T									T						Ħ			-	6	9	,	0	∞	Ť	2	4	-		
	Electrical devices without signal- turnout dependence	y y	-	-	-		2	12	1		4	1													-		-						3	-	,	7	1	I	7		-		
ι	Electrical-mechanical devices with signal-tumout dependence	5	0	-	-			27	1		1	00													2				-			-		-			2		2	4	7		
	gnislochothi yelor ətəlqmoənl	4	+																															-									
10	Complete interlocking with relay of electronic devices	"	15	35	00	15	17	2	2	34	2	1		2		1				-	-	1							2	1	-		1	1	-	-			-		∞		
	RAILWAY LINES		Beograd - Stara Pazova - Šid - State Border - (Tovamik)		Tabanovce)	(Beograd) - Rakovica - Jajinci - Mala Krsna - Velika Plana (Beograd) - Stara Pazova - Novi Sad - Subotica - State Border -	oia)	Niš - Dimitrovgrad - State Border - (Dragoman)	Beograd Centar - Pancevo giavna stantea - visac - State Border - (Stamora Moravita)	(Beograd) - Resnik - Požega - Vrbnica - State Border - (Bijelo Polje)	Lapovo - Kraljevo - Lešak - Kosovo Polje - Đeneral Janković - State	Subotica - (Volkovo) Subotica - Bogojevo - State Border - (Erdut)	Beograd Centar - Novi Beograd	Beograd Ranžima "A" - Ostužnica - Batainica Beograd Ranžima "A" - Ostužnica - Batainica	Beograd Ranžima "B" - Ostružnica	Beograd Ranžíma "A" - Rasputnica "B" - Rasputnica "K/K1" - Resnik	Ostružnica - Rasputnica "B" - (Rasputnica "K/K1")	Beograd Ranžirna "B" - Rasputnica "R" - Rasputnica "A" - (Resnik)	rad Ranžirna "B") - Rasputnica "R" - Rakovica	Beograd Ranžima "A" - Rasputnica "T" - Rakovica	Beograd Ranžirna "B" - Rasputnica "T" - (Rakovica)	vezni kolosek na području Rasputnice "K/K1": (Rasputnica "B") - skretnica "K" - skretnica "K1" - (Jajinci)	Topčider - Rasputnica Savski most - (Novi Beograd)	1 opcider - Beograd spoijna - Beograd Dunav - Kaspumea Fancevacki most	obilazni kolosek stanice Beograd Spoljna: (Topčider) - Blok 1 "Obala" - Blok 2 "Prelaz" - (Beograd donji grad)	(Rasputnica Pančevački most) - Rasputnica Karadordev park - Rasputnica Dedinje - (Rasputnica G)	Indija - Golubinci Novi Sad - Novi Sad Ranžirna - Rasmunica Sailovo	obilazni kolosek stanice Mala Krsna: (Kolari) - odvojna skretnica 1 -	Rasputnica Lapovo Variš - Lapovo ranžirna - Lapovo	rrupare - rus fanzina - intentitovo Crveni kist - Niš ranžirna	Niš - Rasputnica most - (Niš ranžirna) Spojni kolosek stanice Niš: (Crveni krst) - odvojna skretnica 2 - odvojna	Skretinca 4 - (Cele kiua). Subotica - Horgoš - State Border - (Roszke)	Pančevo Glavna stanica - Zrenjanin - Kikinda - State Border - (Jimbolia)	Banatsko Miloševo - Senta - Subotica	Pančevo Varoš - Rasputnica 2a - (Jabuka)	NOVI Sau - Ouzaci - Bogojevo	(Novi Sad) - Rasputnica Sajlovo - Rimski šančevi - Orlovat stajalište	Novi Sad Ranžirna - Sajlovo Rasputnica Orlovat - Rasputnica Ia - (Lukiĉevo)	Onovar - reasputinca ra - (Euracevo) Ruma - Sabac - Rasputnica Donja Borina - State Border - (Zvornik	Novi) Platičevo) - Rasputnica 1 - Rasputnica 3 - (Štitar)	Stalać - Kraljevo - Požega	spojni kolosek stanice Kraljevo: (Mataruska Banja) - odvojna skretnica broj 72 - odvojna skretnica broj 73 - (Adrani)	spojni kolosek stanice Požega: (Uzići) - odvojna skretnica broj 53 - odvojna skretnica broi 54 - (Draeačevo)
	Railway Line No	10			\neg	-	104 (Kelebia)	_	106 Beogn (Stame	107 (Beogn	108 Lapov	109 Suboti	П	US Beogn	13 Beogr	114 Beogn	115 Ostniž	116 Beogn	17 (Beog	П	119 Beogn	120 vezni l skretni	121 Topčio	122 Topcic most	28 obilazi Blok 2	31 (Raspu Raspu	125 Indija	T	128 Raspu	\neg	131 Niš - F 132 Spojni	Ol Suboti	202 Pančer	203 Banats	т	$\overline{}$	206 (Novi	207 Novi S 208 Orlova		_	$\overline{}$	212 spojni broj 7.	213 spojni odvoju
\vdash	oN	-		, ,	\dashv	+	4	\vdash	9	7 1	8	9 1	01	12 1	13	14	15 1	16 1	17	Н	19 1	20 1.	21 1	22 1.	23 2	24 3	25 1		28 1	+	31 1	33	34 2	35 2	Н	+		39 2		+	+	44 2	45 2
\Box						1	ocidi.		3000	WO HAVE	-			T			1	_						***		3.3	146	155	1.1	700	3.55	1,0	3.5	Les.		1				4	1		~



	_		_	_	_	_	_	_		_		_	_	_	_	_	_	,	_	_	_	_	_	_	,	_	_	_	_	_	_		_	_	_	_	_	_	_	_	_	_	_	_	
		Manual positioning of turnouts on the hump	2	24											L																							\perp	\downarrow			Ц			0
	g yards	Decentral positioning of turnout for grain position from part of the formula of t	umber of turns	23																																									0
	Devices in marshalling yards	To gainoitised otherwoluA qrand off no hormal	Z.	22																						- 34																		Ī	32
	Devices i	Marshalling yards without automatic marshalling		21																										l								T	Ī						2
	2000	Marshalling yards with automatic marshalling	Number of	20													0-0																				0		Ī						0
Poduino	AS	Mechanicalsignal	Sallses	19			T							Ī	T				1		Ť	İ						T	1	İ					Ì	İ		T	Ť	T		П	Ī	T	0
Signal	with AS	lsngiz idgid	Ξſ	18	3																																								1212
		Mechanical signal	2	17	14	22	15	3	3					-				4	2				12			2				13	77														263
trino	Other	Isngis 14giJ	BI SIBIR	16	45	4						-		-			2	4		·	7			2		3	3																		1217
Signal temo	Main	Mechanical signal	iniper	15	13	34	3,6	3	3					-	L			4	2				15			2		Ĺ		1 51	77										-	\prod			338
	M	Lengis idgi J	7	14	8/1	22	29	5				-		[-	Ĺ		2	8		,	7			2		3	6																		2123
Turnout hoating	Gillian II			13																																									0
Turno		Electrical Electrical	isamper	12	+7		~							L	L					1									_					1				\downarrow	ļ	L		Ц	_		630
	ρλ	On-site control and interlocking means of turnout lock	1	- 1	130	127	50	10	3			7	2	-	4		84	46	56	19	101	IO	52	16		41	=		d	9 5	17		14	- 342	1	20	٥				-	7	4 -	4	2574
locking	Silvania Silvania	On-site control and interlocking by means of electrical controller	Sinonin	10			9																																						31
Turnout interlocking	am morning	Central control desk and interlocking by means of mechanical devices	Number of t	6	-	∞																																							103
		Central control deak and interlocking by means of electric positioning devices	٥	∞ 5	00	15	00											4																				T	T					T	2349
ľ	-le	Mechanical devices without signa turnout dependence		۲,	5	14	İ	-	1					-	T				8	-		,	9			-			1	·	4				1	,	7	T	T	Ī		-	1	T	94
ŀ		Electrical devices without signal- turnout dependence	OIIS	9	0	-						-			Ī				1	-	-			1		-	-		1		+					1		T	T			П	Ť	T	55
	цы	Electrical-mechanical devices wi	Number of state	s -	1	2		-	_																													Ī	Ī						09
		Incomplete relay interlocking	п.	4 -	+	2	-	,						T							T						Ì			T						1		T	T				Ī	T	æ
	10 /	Complete interlocking with relay electronic devices	,	3	10	2	4	-										2																											187
		RAILWAY LINES		2	Maia Krsna - Bor - Kaspurnica 2 - (Vrazogrnac)	Crveni krst - Zaječar - Prahovo pristanište	Oplievac - Kastrat - Kosovo Polie	Kuršumlija - Kastrat	(Barlovo) - Rasputnica 1 - Kuršumlija	Kosovo Polje - Metohija - Peć	Kosovo Polje Teretna - Rasputnica 1 - (Drenica).	Subotica - Subotica fabrika	Subotica - Subotica bolnica	Novi Sad - Novi Sad Iožionica	(Podbara) - Rasputnica 3 - Rasputnica 2 - (Kać)	Rimski šančevi) - Rasputnica 1 - Rasputnica 3 - (Podbara)	Rimski šančevi - Bečej	Vrbas - Sombor	Petrovaradin - Beočin	Apatin Fabrika - Strilić - Sombor	Date - Natavinovo	Backa Fatalika - Oajuobia Brasina) - Rasmitnica Donia Borina - Zvornik Grad	Šid - Sremska Rača Nova - State Border - (Bijeljina)	Kikinda - Banatsko Arandelovo	Sečanj - Jaša Tomić	Zrenjanin Fabrika - Vršac - Bela Crkva	Pančevo Varoš - Pančevo Vojlovica	spojni kolosek stanice Senta: (Čoka) - odvojna skretnica 22 - odvojna	skretnica 23 - (Orom)	(Pozarevac) - Kasputnica Sopot Pozarevacki - Kostolac	Ovča - Padinska Skela	Metohija - Prizren.	Bečej - Vrbas	Vršac - Vršac Vašarište	Alibunar - Seleuš	Vladimirovac - Kovin	Coka - Novi Knezevac Kibinda - Motanoleko einkotni kommloke (km 6±413)	Kikinda - Metanoisko sircetin kompieks (km 0+413) Bogojevo - Dunavska obala	Bogojevo - Dunavska obata Sombor) - Rasputnica Strilić - Bački breg	Sombor - Ridica	(Višnjićevo) - Rasputnica Rača - Sremska Rača	Paraćin - Stari Popovac	Surčin - Jakovo Bečmen	(Beograd spoljna) - km 2+290 odvojna skretnica - Fabrika secera Šarganska osmica	Total:
\mid		Railway Line No	1	$\overline{}$	_	216 C	_	_				\neg	302 S	+		Н	307 R	\neg	\neg	310 A	_	+		-	316 S	-	318 P	1	$\overline{}$	327	\neg	324 N			\neg	_	-	400 A	+	1	1	Н	-	413 501 S	$\overline{}$
		oN		- 5	/+	8 0	20	51	52	53	54	25	56	28	59	09	19	62	63	64	60	00	89	69	70	71	72	2 5	+	0 7	77	78	42	80	81	82	83	85	8	87	88	68	06	92	



95

											INTER	LOCKI	NG FA	CILITIE	S								
			Tutunan	Carlo Paris							1		Level	crossing	safety (levices							
			Intersta	tion deper device	ndence		Autor	matic t	oloc		Autor	natic pos cros	itioning sings	of level	Man	al posit	ioning o	flevel	Trai	fic remote	contro	ol dev	ices
	1	RAILWAY LINE	k line	ck line	between	k line	ck line	nts		quipped with	ba	arrier or rrier udinal		colour		trical ices		nanical vices	k fine	ck line	ontrol centers	antrol stations	controlled
No	Railway Line No		Length of single track line	Length of double track line	Number of distances between stations	Length of signle track line	Length of double track line	Number of block points	Number of signals	Number of signals equipped with auto-stop devices	in station	on track	in station	on track	in station	on track	in station	on track	Length of signle track fine	Length of double track line	Number of remote control centers	Number of remote control stations	Number of remotely controlled stations
1	la	2	3	4	5	6	7	8	9	10	-11	12	pcs 13	14	15	16	17	18	19	20	21	22	23
1	101	Beograd - Stara Pazova - Šid - državna granica - (Tovarnik)						61	120	120	14	12	10				Œ			97+918	ĺ	5	6
	102	Beograd - Mladenovac - Lapovo - Niš - Preševo -	6+000		Ľ		14+150	195	443	289	37	53	1	1	2		8	4			2	38	15
2	103	državna granica - (Tabanovec (Beograd) - Rakovica - Jajinci - Mala Krsna - Velika				93+143	-	41	81	81	11	3	-				1				1	12	4
3	10/3	Plana (Beograd) - Stara Pazova - Novi Sad - Subotica -				become.				91	11	,									1	12	1
4	104	državna granica - (Kelebia)	15+020		4	133+722		61	121	121	15	8			2	1	1	2					
5	105	Niš - Dimitrovgrad - državna granica - (Dragoman Beograd Centar - Pančevo glavna stanica - Vršac -			1.7	16+100	Jan Sel	6	-11		5	7.			3	4	7	4				H	
6	106	državna granica - (Stamora Moravita)	82+200	19+070	14		19+600	10	26	26	4.	2					8	1				Ш	
7	107	(Beograd) - Resnik - Požega - Vrbnica - državna granica - (Bijelo Polje)	287+013		33						3	9_	1	15				1	287+013		1	26	9
8	108	Lapovo - Kraljevo - Lešak - Kosovo Polje - Đeneral Janković - državna granica - (Volkovo									3		2		I		7	4					
9	109	Subotica - Bogojevo - državna granica - (Erdut	69+820		11						1	5	-1				-11	10					
10	110	Beograd Centar - Novi Beograd Beograd Centar - Rasputnica G - (Rakovica					2+887 4+416	4	8	8	P. 1						=					H	
12	112	Beograd Ranžima "A" - Ostružnica - Batajnica				25+658	1.11	14	26	26	1	1					}_				1		2
13	113	Beograd Ranžirna "B" - Ostružnica Beograd Ranžirna "A" - Rasputnica "B" - Rasputnica				5+902 10+419		4	8	8	1						1					1	1
14	115	"K/K1" - Resnik Ostružnica - Rasputnica "B" - (Rasputnica "K/K1")				2+121		1	2	2	4.				_		1					3.	1.
	116	Beograd Ranžirna "B" - Rasputnica "R" - Rasputnica				4+538		2	2	2													
16	117	"A" - (Resnik) (Beograd Ranžirna "B") - Rasputnica "R" - Rakovica			-	1+149		-	-				-		-		-				-	-	
18	118	Beograd Ranžima "A" - Rasputnica "T" - Rakovica				0+709																	
19	119	Beograd Ranžima "B" - Rasputnica "T" - (Rakovica vezni kolosek na području Rasputnice "K/K1":				8+379		3	5	5		-					-					Н	
20	120	(Rasputnica "B") - skretnica "K" - skretnica "K1" -				0+463																	
20	121	(Jajinci) Topčider - Rasputnica Savski most - (Novi Beograd				3+578		1	-1								7						
22	122	Topčider - Beograd spoljna - Beograd Dunav - Rasputnica Pančevački mosi				6+257	4+519		1				Щ			I	.0	0					J.
23	123	obilazni kolosek stanice Beograd Spoljna: (Topčider) - Blok 1 "Obala" - Blok 2 "Prelaz" - (Beograd donji grad)				1+757											1						
24	124	(Rasputnica Pančevački most) - Rasputnica Karadordev park - Rasputnica Dedinje - (Rasputnica G)					1+591						Щ				\mathbb{L}			Щ			1
25	125	Indija - Golubinci Novi Sad - Novi Sad Ranžima - Rasputnica Sajlovo	4+020 3+749		2	4+020		2	4	- 4			-					-					
27	127	obilazni kolosek stanice Mala Krsna: (Kolari) - odvojna skretnica 1 - odvojna skretnica 28 - (Osipaonica)				2+387					1						1						
71	128	Rasputnica Lapovo Varoš - Lapovo ranžirna - Lapovo					3+788			-													
28		Trupale - Niš ranžirna - Međurovo				1+220	2,740	2	3	1												\vdash	
30	130	Crveni krst - Niś ranžirna				17+100	T	1	2														
31	131	Niš - Rasputnica most - (Niš ranžirna) Spojni kolosek stanice Niš; (Crveni krst) - odvojna				4+990 0+500		4	7		>1	2									H	H	
32		skretnica 2 - odvojna skretnica 4 - (Čele kula) Subotica - Horgoš - državna granica - (Roszke	24+351		5	UTAM					3	-2					2	2			-	\vdash	
	201	Pančevo Glavna stanica - Zrenjanin - Kikinda - državna			14						4	10	111		1		11	4					
34		granica - (Jimbolia) Banatsko Miloševo - Senta - Subotica	80+264		14						-	1					2	2				\vdash	
36	204	Pančevo Varoš - Rasputnica 2a - (Jabuka)	1+600		1							11.71	1										
37		Novi Sad - Odžaci - Bogojevc (Novi Sad) - Rasputnica Sajlovo - Rimski šančevi -	89+457		10							1	-		1		7	4					
38	206	Orlovat stajalište Novi Sad Ranžima - Sajlovo Rasputnica	65+405 2+502		1)	-						1					4	3	-			Ш	
40		Orlovat - Rasputnica 1a - (Lukićevo)	0+630		1																		
41	209	Ruma - Šabac - Rasputnica Donja Borma - državna granica - (Zvornik Novi				101+951						3			4	3	3	6					
42	210	(Platičevo) - Rasputnica 1 - Rasputnica 3 - (Štitar)	-																				
43	211	Stalač - Kraljevo - Požega				135+733						2	1		2		4	5		6.1			
44	212	spojni kolosek stanice Kraljevo; (Mataruška Banja) - odvojna skretnica broj 72 - odvojna skretnica broj 73 - (Adrani)																					
Ţ	213	spojni kolosek stanice Požega: (Uziči) - odvojna skretnica broj 53 - odvojna skretnica broj 54 -																					
45	214	(Dragačevo) Smederevo - Mala Krsna				11+742					1	1	1		1		2	2				H	
47 48	215	Mala Krsna - Bor - Rasputnica 2 - (Vražogrnac)										14			1		7	1				F	
49	217	Crveni krst - Zaječar - Prahovo pristaništi (Rgotina) - Rasputnica 3 - Rasputnica 1 - (Trnavac)								-	-	1			1		1	1					
		Doljevac - Kastrat - Kosovo Polje Kuršumlija - Kastrat													1								



		I									INTER	LOCKI	NG FAC	CILITIE	S							_	\neg
														crossing		levices							
			Intersta	tion depe	ndence		Auto	matic b	loc		Auton		itioning		-	al positi		level	Traf	fic remote	contro	l devi	ces
												cros	sings			cross	sings					_	
		RAILWAY LINE	line	cline	etween	line	Lline	ts		ipped with	ba	arrier or rier udinal		colour	elect	rical ices		anical ices	line	. line	trol centers	trol stations	ontrolled
	Railway Line No		Length of single track line	Length of double track line	Number of distances between stations	Length of signle track line	Length of double track line	Number of block points	Number of signals	Number of signals equipped with auto-stop devices	ın station	on track	in station	on track	ın station	on track	in station	on track	Length of signle track line	Length of double track line	Number of remote control centers	Number of remote control stations	Number of remotely controlled stations
°N	aily				-			Ž	Ž	ZĒ	Ë	0		10	ii	ОПО	.5	0			Ž	_	Z is
1	la	2	3 ki	M 4	kom 5	6 ki	m 7	8	9	10	11	12	pcs 13	14	15	16	17	18	19	m 20	21	pcs 22	23
52	220	(Barlovo) - Rasputnica 1 - Kuršumlija		-	-		-			10	11	12	1.0	1.7	13	10	17	10	17	20	21		20
53		Kosovo Polje - Metohija - Peć																			\Box	\Box	
54												8										\sqcap	
55		Subotica - Subotica fabrika	4+100		1									1				4				\Box	
56	302	Subotica - Subotica bolnica	2+745		1																	П	
57		Kanjiža - Horgoš										0											
58		Novi Sad - Novi Sad ložionica	2+870		1										2			1					
59	305	(Podbara) - Rasputnica 3 - Rasputnica 2 - (Kać)	3+659		2																		
60	306	(Rimski šančevi) - Rasputnica 1 - Rasputnica 3 - (Podbara)	0+910		1																		
61	307	Rimski šančevi - Bečej										0			1		9						
62	308	Vrbas - Sombor									1	1			2		1	1					
63		Petrovaradin - Beočir	17+035		3												2	2				\Box	
64		Apatin Fabrika - Strilić - Sombor	38+304		4							-					1	2				\sqcup	
65		Bač - Karavukovo	13+420		2										1		1					\Box	
66		Bačka Palanka - Gajdobra	14+422		2												2	4			Ш	\vdash	-
67	313	(Brasina) - Rasputnica Donja Borina - Zvornik Grac				6+818						-									Ш	\vdash	-
68	314	Šid - Sremska Rača Nova - državna granica - (Bijeljina)				25+612												2					
69			12+916		4			_									2				Ш	\vdash	
70		Sečanj - Jaša Tomić	10+363	_	1																Ш	\vdash	-
71		Zrenjanin Fabrika - Vršac - Bela Crkvε	65+3348		4	2						1					4	-				\vdash	_
72		Pančevo Varoš - Pančevo Vojlovica	2+907 0+488	-	2				-			1			1	3		-			-	\vdash	-
73	319	(Uljma) - Rasputnica A - Rasputnica B - (Jasenovo)		_	1						_		_								Н	\vdash	-
74	320	spojni kolosek stanice Senta: (Čoka) - odvojna skretnica 22 - odvojna skretnica 23 - (Orom)																					
75		(Požarevac) - Rasputnica Sopot Požarevački - Kostolac				9+900																	
76 77		Markovac - Resavica	10.500			53+250		-	-			1		1	1		3	4			\vdash	\vdash	-
78		Ovča - Padinska Skela	18+580		1	18+580		\vdash				3									\vdash	\vdash	
79		Metohija - Prizren. Bečej - Vrbas						\vdash									1				\vdash	\vdash	-
80		Vršac - Vršac Vašarište		\vdash	\vdash			\vdash	_		_		\vdash		_		1				\vdash	$\vdash\vdash$	-
81		Alibunar - Seleuš	8+386		1					_										-	\vdash	\vdash	-
82		Vladimirovac - Kovir	43+030		1			\vdash				0						2			\vdash	\vdash	
83		Čoka - Novi Kneževac	12+300		2			\Box									1	-			\vdash	\vdash	\neg
84	406	Kikinda - Metanolsko sirćetni kompleks (km 6+413	7+255		1																П	П	
85	407	Bogojevo - Dunavska obala	2+733		1																П	\Box	
86	408	(Sombor) - Rasputnica Strilić - Bački breg	28+090		1							2											
87	409	Sombor - Ridica	32+741		1																		
88	410					3+830																\square	
89											1						1				\Box	Ш	
90	412	Surčin - Jakovo Bečmei				4+400						Č.										\square	\Box
91	413	(Beograd spoljna) - km 2+290 odvojna skretnica - Fabrika šećera				0+600																	
92	501	Šarganska osmica																					
1		Total			161			416	876	699	107	127	7	18	28	12	115	76			6	82	37



97

Appendix 3.7 Overview of telecommunication devices equipping level

○ % % ½ ¼ GB telephone devices	Trackside telephon								Ì
					_				
pss ppss ppss	At entry signals At exit signals At level crossings (PP At automatic block (A	radite radition services sample 1	ssoivob gnillangis bnuo2	"Sjeb pà sjeb" sàsjem	Cross-bar	EMD with electric motor dialler	ЕГССДОИЈС	"Step by step" system	Sognerions gririonequi
24 85 6 7 8 9 0 1 8 8 9 8 9 8 9 9 9 9 9 9 9 9 9 9 9 9 9	bcs pcs	F	pcs type	t	type pcs t		pcs type	pcs type pcs	-
25 350 6 1 0 0 54 1347 40 2 2 111 96 41 2 0 0 0 0 30 665 3 2 0 4 0 28 0 11 0 0	12 13	91	Н	20 2	22	Н	Н	50	
96 44 2 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	35 35 23 11	0 6 0	18	2 4	1 2	0 0	3	2 to-529 2	0 2 2
30 665 3 2 0 4 0 28 0 111 0 0	36 44	3	8		0	0	1	TW-39	H
0 28 0 11	39 38 31 55	25 5 0	3 eb5	3 F	0 097	0	2	0 TW-39 I	2
	9 19	0	6	0	-	0	Н		0 0
0 245 6 5 0 1	15 4	9	┪	0	0	0	+	4	0 1
89 52 418 59 0 0 2 35	8 4 10 0	70 15 0	12 ISKRA	21 -	S - O	Siemens 2 0	0 Zeate 100	2 TW-39 I	2 0
0 2 0 0	4	0 0 0	! m	. 0	. 0	0	0 omnis3		-
2 0 0 0	2	0 1 0	1	0	-	0	0		0 0
	6 5 0 4	0 0	0	0 0	0 0	0	0 0	0	0
0 0 0 0	0 0 0 0 2	0 0	0 0	0 0	0 0	0 0	0 0		0
0 1 0 0 0 0 0	1 0 0 1	0 0 0	0	0	0	0	0	0	0 0
2 0 0 0 0 0 0	2 0 1 3	0 0	0	0 0	0 -	0	0 0	0	0
0 0 0 0 0	0 0 0 0 0 0	7 0 0	0 0	0 0	- 0	0 0	0 0		0
0 168 33 0 0 0 0 0	0 0 0 0	0 3 0	0	0	0	0	0	0 0	0
0 0	1 0 0 1	0 0 0	0 0	0	0	0	0		0 0
0 0 0 0 0 0	3 0 0	7 0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0
0 2		0 2 0	0	0	0	0	0		0
0	0	0 0 0	0 0	0	0	0	0	0 0	0
0 0 0 0 0 0 0 0	2 0 0 0 2	0 0	0 0	0 0	0	0 0	0 0	0 0	0 0
1 20 0 0	2 0 0 0	0 0 0	1	0	0	0	0	0 0	0
0 0 0 0 0 0 0 0 0 0	0 4 0	0 0	0	0 0	0 0	0	0 0	0	0
0 0 0 8	0	5 2 0	0	0	-	0	0		0
0	1 0 0 0	0 0 0	0	0	0	0	0		0
0 0 0 0 0 0	0 0	+	0	0	0	0	0		0
13 0 0 0 0 0 0 0 0	0 0 0	0 0	5 0	0 0	0 0	0 0	0 0	0 0	0
0 216 4 0 0 0	-	0 1 6	13 fb5	-	-	0	0	TW-39	0
	0 0 0 0	0 0	0 0	0	0 0	0 0	0 0	0 0	0 0
0 12 0		0 0	2	. 0		0	0	0	0
0 5 0	0 0 0 0	0 0 0	0	0	0	0	0	0	0
0 0 0 0 0 0 0	0 0 0 0	0 0 0	0	0	0	0	0	0 0	0
0	0 0 0 0	0 0 0	0	0	0	0	0	0	0
0 0	0 0	0 0	0	0 -	0 -	0 0	0 0		0 0
8 0 0 0 0 0	1 4 8 0	7 0	0 (- 0	- 0	0 0	0 0	0 0	0 0
0 125 6	3 0 16 0	0 0	12	> -	0	0 0	0 0		0
0 200 2 16 0 0 1	2 1 0 0	0 0 0	0	-	0	0	0	0 0	0 0
0 3 0 0 0 0	0 0	0 0 0	0	0	0	0	0		0
0 0 0 0 0	0 0	0 0 0	0	0	0	0	0		0
0 0 0 0 0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0		0
	0 0 0 0	0 0	0	0	0	0	0	0	0
0 0 0 0 0 0 0	0 0 0 0	0 0 0	0	0	0	0	0		0
4 0 30 0 0 0 0 0	1 0 0 0	0 0 0	-	0	0	0	0	0 0	0



Г				Station dispatching devices	bcs	32	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0 0	0	0	0	0	0	0	0	0	0	0	181
				Dispatching exchanges	bcs	31	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0 0	0	0	0	0	0	0	0	0	0	0	10
	q				bcs	30	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0 0	0	0	0	0	0	0	0	0	0	0	7
	Telegraph			"Step by step" system	ype	59								- 0							1	1	t	T	r							П	1	
	L		_								Н								_		+	+	+	H								H	+	
				Electronic	bcs	28	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		0	0	0	0	0	0	0	0	0	0	S.
					type	27																												
UNITS					bcs	26	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	17
EXCHANGE UNITS				ESK	type	25														1	1	1	Ī	T	Ī							П	1	
EXC		r			bcs	24	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	2
	Telephone			EMD with electric motor dialler	type	3								0							1	1	t	t									1	
	T	L			ty	23					Ц							Ц		4	4	1	1	-	L							Ц	4	
				Cross-bar	bcs	22	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	12
					type	21												_																
					bcs	20	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	17
				"Ztep by step" system	e						Н									-	+	+	+	-									+	
L					type	H															_	1	+	<u> </u>	L								4	70202
_		_		Sound signalling devices	bcs	18	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		0	0	0	0	0	0	0	0	0	0	156
	Telegraph	L		Telefaxes	bcs	17	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	=
	Te		_	Teleprinters	bcs	16	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		0	0	0	0	0	0	0	0	0	0	88
				Others	bcs	15	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	126
			hones	At automatic block (APB)	bcs	14	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	397
			Trackside telephones	(PP) (PP) (PP)	bcs	13	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	284
			Track	Anngis tixs 1A	sod	12	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0 0	0	0	0	0	0	0	0	0	0	0	351
EVICES				Alengis yina 1A	bcs	11	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	415
TERMINAL DEVICES		remote control	COUNTRY	snoitets yewlier 1A	bcs	10	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	201
FINAL TER	Telephone	Traff remote	desks	At operational dispatching centers	bcs	6	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0 0	0	0	0	0	0	0	0	0	0	0	24
H	Tel	F	-	PA delephones	bcs	∞	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0 0		0	0	0	0	0	0	0	0	0	0	o
				PPA telephones	-	H	0	Н	0	0	0	0	0	0	0	0	0	0	0	0	0	200		+		0	0	0	0	0	0	0	0	96
		_		Secretary sets		H	0	Н	0	0	Н	0	0	0		0	0	0				+		-	H	0	0	0	0	0	0		0	182 9
						H						Н								-		+	+	H	H								+	
				Automatic telephone devices		H	0	Н	_	Н	Н	-	0	0		0	0	-	+		+	+	0 0	+		0	0	0	0	0	0		0	2 4598
				CB telephone devices		H	0	Н	_		Н	_	0	0		0		0	+		+	+		╀	H	0	0	0	0	0	0	Н	0	3 262
L				LB telephone devices	bcs	3	0	0	0	0	0	0	0	0	0	0	0	3	0	0	0	6	0	0	0	0	0	0	0	0	0	0	٥	880
				RAILWAY LINE	No	2	45 306 (Rim. Šančevi)-Rasput "1"-Rasput. "3"-(Podb.)	\vdash	69 309 Petrovaradin-Beočin	74 310 Sonta-Apatin fabrika-Strilić-(Sombor)	311	55 312 Bačka Palanka-Gajdobra	46 313 (Ruma)-Rasp.Donja Borina-Zvomik Grad	52 314 Šid-Sremska Rača Nova-State Border.		316 Sečanj-Jaša Tomić	81 317 (Zrenjanin)-Zrenjanin fabr.Vršac-Bela Crkva	67 318 Pančevo Varoš-Pančevo Vojlovica	319	320	321	327	52 403 Albumar-Seloni	404	59 405 Čoka-Novi Kneževac	61 406 Kikinda-MKS (ind.kolosek)	58 407 Bogojevo-Dunavska obala	72 408 Sombor-Bački Breg	73 409 Sombor-Ridica	79 410 (Višnjićevo)-Rasput.Rača-Sremska Rača	411	\rightarrow	57 413 (Bgd spoljna)-km 2+290-Fabrika šećera	Total:



Particular property of the particular property												OTHER	OTHER TELECOMMUNICATION DEVICES	AMUNIC	ATION DI	SVICES									
Part All Market		Devic	ses for re	atements	f transmitte	Þ	Devices d	isplaying a	ccurate tin	20		PA devi	ices			Interphone	s		Power st	ıpply devic	sac	Passer	nger visual	informati	on display
	oV ənii yawlıs	8 channels	12 channels					Master clocks	siobrianagai asluqml	Auxiliary clocks	Number of statons	sıəililqmA											Control desks	sysiqsib noitsmroini	Information kiosks
		pcs 33	34 pc	+	+	1	+	36	pcs 40	pcs 41	pcs 42	pcs 43			+		+	70 -				pcs 54	pcs	pcs 56	pcs 57
18 District Control Contro		1	1		0	\vdash	Н	1	13	5	13	22	H	H	H	H	H	_	İ		H	10	0	0	0
11		9	2	0	-	9	2	21	78	323	20	50		20	9	4 3	8 I.	7 72		1 0	1	1	1	4	0
Statistucce particular particul			0 -	0	0 -	20	0 0	3	20	133	- "		9	1 0	0		0 0	25			0 %	0 -	0 0	0 0	0 0
No. Control Contro		-	0		0	0	0	2	3	20	1	-	3	1	0	H	Н			\mathbf{H}	H	0	0	0	0
No. No. No. No. No. No. No. No. No. No.	106	1 2	0 0		0 0	34	0 3	34	34	92	7	52	_	9	+						+	0 5	e 0	0 93	0 0
11	108	-	0	+	0	6	0	8	0	18	8	6	+	0	+	+		+		9	0	0	0	0	0
11	108	0 0	0 0	0 0	0 0	0 0	0 0	0 -	0 -	0 6	0 4	0 1	0 22	0 9	0 0					0 0	0 0	0 0	0 0	0 0	0 0
11 12 12 12 12 12 12 12	Ξ	0	0	+	0	0	0	0	0	0	0	0	0	0	0	+	0	0		0	0	0	0	0	0
11 11 11 11 11 11 11 1	112	0 0	0		0 0	0	0	0	0	4 0	0	0 0	0	0	0		0	3		0 0	0 0	0 0	0 0	0 0	0
11	1114	0	0		0	0	0	0	0	0	0	0	0	0	0	H	0				0	0	0	0	0
11.11	115	0 0	0 0		0 0	0 0	0 0	0 -	0 0	000	0 0	0 4	0 00	0 -	0 0		0 0	0 -	- "	0 0	0 0	0 0	0 0	0 0	0 0
10	117	0	0		0	0	0	0	0	0	0	0	0	0	0		0	0	3	0	0	0	0	0	0
11	118	0 0	0 0	+	0 0	0 0	0 0	0	0 0	13	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0		0 0	0 0	0 0	0 0	0 0	0 0
13.1	120	0	0	0	0	0 00	0	3	0	10	0	4	31	2	0	0	0		12		0	0	0	0	0
11.11 Michaely Signational Activity Signature Michaely Signature Micha	121	0	0		0	0	0	0	0	0	0	0	0	0	0	0	0	2		0	0	0	0	0	0
151 Michael September 152 Michael September 153 Michael September 154 Michael September 154 Michael September 154 Michael September 155 Michael Se	122	0 0	0 0	+	0 0	0 0	0 0	0 0	0 0	6	0 0	- 0	0 0	- 0	0 0	0 0	0 0	0 0		0 0	0 0	0 0	0 0	0 0	0 0
1 1 1 1 1 1 1 1 1 1	124	0	0		0	0	0	0	0	0	0	0	0	0	0	0	0	0	9	0	0	0	0	0	0
123. Displace Missing M	125	0 0	0 0	+	0 0	0 0	0 0	0 0	0 -	0 9	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 -		0 0	0 0	0 0	0 0	0 0	0 0
121 Patrola Vinocida Japono 121 Patrola Vinocida Japon	127	0	0	H	0	0	0	0	0	0	0	0	0 0	0	0	0	0	0	3	00	0	0	0	0	0
131 Contact Recommendation 132 Contact Recommendation 133 Contact Recommendation 134 Contact Recommendation 134 Contact Recommendation 134 Contact Recommendation 135 Contact Recommendation	128	0	0	Н	0	0	0	2	2	3		1	2		0	0	0	ε (0	0	0	0	0	0
131 (Schrick-Schrick	130	0	0		0	0	0	0	0 0	0	0	0 0	0 0	0	0 0	00	0 0	0	, 3	0 0	0 0	0	0 0	0	0
Note Note	131	0 0	0	Н	0 0	0	0 0	0	0 0	0	0 0	0	0 0	0 0	0 0	0 0	0	0		000	0	0 0	0 0	0	0
No. No. No. No. No. No. No. No. No. No.	201	0	0		0	0	0	-	0	3 0	0	1	3 0	1	0	0	0	2	2	0 0	0	0	0	0	0
3.14 Interval of Interval Collegion (1.2) and Collegion (1.2) a	202	- 0	0	+	0 0	0 0	0	0	0	0	2	2	7	2	0		0 0	2		0 0	0 0	0 0	0	0 0	0 0
200 Column Column <td>204</td> <td>0</td> <td>0</td> <td></td> <td>0</td> <td>9</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td>	204	0	0		0	0	0	0	0	0	0	0	0	0	0	0	0	0	9	0	0	0	0	0	0
2.0. N. Sad Barkerian-Salvane Parametria production 2.0.	205	0	0		0	0	0	0	0	0	0 0	0	0	0	0		0 0	0		0 0	0	0 0	0	0	0
208 Choice-Resignation: **I****-Luskécvo) 0	207	0	0	+	0	0	0	0	0	0	0	0	0	0	0	0	0	0			0	0	0	0	0
2.11 Stark-K-Keljev-Pokoga 1.1 Stark-K-Keljev-Pokoga 1.1 Stark-K-Keljev-Pokoga 1.1 Stark-K-Keljev-Pokoga 1.1 Stark-K-Keljev-Pokoga 1.1 Stark-K-Keljev-Pokoga 1.1 Stark-K-Keljev-Pokoga 1.1 Stark-K-Keljev-Pokoga 1.1 Stark-K-Keljev-Pokoga 1.1 Stark-K-Keljev-Pokoga 1.1 Stark-K-Keljev-Pokoga 1.1 Stark-K-Keljev-Pokoga 1.1 Stark-Keljev-Pokoga	208	0 0	0	0 0	0 0	0 0	0 0	0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0	0 0	0 0		0 0	0 0	0 0	0 0	0 0	0 0
2.13 Mixture Mixture Circle Rational State Work State	211	0	0	Н	0 0	2	0	2		41 6	. 3	2	20	-	0	0 0	0	17	2	0	0 0	0	0	0	0
210 Misk-Zajgezer Pathovo pristantiste 0	215	0	0		0	7 8	0	2	7	10	3	4	22	3	0	0	0	18		0	0	0	0	0	0
2.19 (Kankmilds)-Karkert Kantan-Norsky Polys 2.19 (Kankmilds)-Karkert Kantan-Norsky Polys 2.19 (Kankmilds)-Karkert Kantan-Norsky Polys 2.19 (Kankmilds)-Karkert Kantan-Norsky Polys 2.19 (Kankmilds)-Karkert Kantan-Norsky Polys 2.19 (Kankmilds)-Karkert Kantan-Norsky Polys 2.19 (Kankmilds)-Karkert Kantan-Norsky Polys 2.10 (Kankmilds)-Karkert Kantan-Norsky	216	0	0		0	1	0	- 0	0	0	1	2	20	1 0	0	0	0	5		0	0	0	0	0	0
230 (Barktov-D-Agagantica "1"-Kargantija" 0	218	0 0	0 0	+	0 0	0	0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0			0 0				0 0	0 0	0 0	0 0
301 Subtotes-Subtotice flathkish 0 <	220	0	0	+	0	0	0	0	0	0	0	0	0	0	0	0	0	0		0	0	0	0	0	0
343 National Assignation Standing	301	0	0		0	0	0	0	0	0	0	0	0	0	0) 0	0	0	5	0	0	0	0	0	0
304 Novi Skal-Novi Skal	303	0	0	+	0	0	0	0	0	0	0 0	0	0 0	00	0	0	0	0			0	0	0	0	0
306 (Rinkmarkshaptu."3"-Rhaptu."3	304	0	0		0	0	0	0	0	0	0	0	0	0	0	0	0	1		0	0	0	0	0	0
308 Vriess-Sombor Vriess-Sombor 0	305	0 0	0 0	+	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0		0 0	0 0	0 0	0 0	0 0	0 0
310 South-valuritie Beckering 0	308	0	0		0	0	0	0	0	0	0	0	0	0	0	0	0	0	3	0	0	0	0	0	0
310 Solution Human-Sammed-Solution 2	309	0	0	+	0	0	0	0	0	0	0	0	0	0	0	0 0				+		0 0	0	0	0
312 Backa Palanka-Gajdobra 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	311	0	0		0	0	0	0	0	0 0	0 0	0 0	0 0	0 0	0 0	0		<u> </u>				0	0	0	0
	312	0	0	-	+	0	0	0	0	0	0	0	0	0	0	0	0	0		-	0	0	0	0	0



	- S											_											_				
	n displays	Information kiosks	bcs	57	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	nformatio	sysiqsib noitsmnolnl	bcs	99	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	26
	Passenger visual information displays	Control desks	bcs	55	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	7
	Passenge	Number of stations	bcs	54	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	14
		Motor electric generator units	bcs	53	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	4
	devices	Сопуейегя	bcs	52	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	Power supply devices	Retifiers	bcs	51	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	379
	Pow	Acummulator batteries	bcs	50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	328
		For outdoor installation	bcs	49	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	18
SS	hones	For indoor installation	bcs	48	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	86
OTHER TELECOMMUNICATION DEVICES	Interphones	Interphone exchange units	bcs	47	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	9
ICATION		Number of stations	bcs	46	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	6
OMMUN		Microphone console	bcs	45	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	76
R TELEC	vices	2 реакетs	bcs	44	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1886
ОТНЕ	PA devices	srəflilqmA	bcs	43	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	183
		Number of statons	bcs	42	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	29
	2	Auxiliary clocks	bcs	41	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	941
	curate tim	Impulse regenerators	bcs	40	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	178
	Devices displaying accurate time	Master clocks	bcs	39	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	101
	evices dis _i	Clock exchange units	bcs	38	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	7
	Ď	Number of stations	bcs	37	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	94
	nsmitted	24 channels	bcs	36	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	4
	ing of tran	16 channels	bcs	35	0	0	0	0	0	2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	10
	Devices for recording of transmitted statements	12 channels	bcs	34	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	10
	Devices	8 channels	bcs	33	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	16
		RAILWAY LINE	Ks	2	313 (Ruma)-Rasp.Donja Borina-Zvornik Grad	314 Šid-Sremska Rača Nova-State Border.	315 Kikinda-Banatsko Arandelovo	316 Sečanj-Jaša Tomić	17 (Zrenjanin)-Zrenjanin fabr. Vršac-Bela Crkva	318 Pančevo Varoš-Pančevo Vojlovica	319 (Uljma)-RaspA-RaspB-(Jasenovo)	20 Senta-Odvojna skr. 22 Senta	(Požarevac)-Rasput.Sopot PožKostolac	322 Markovac-Resavica	323 Ovča-Padinska Skela	403 Alibunar-Seleuš	404 Vladimirovac-Kovin	405 Čoka-Novi Kneževac	406 Kikinda-MKS (ind.kolosek)	.07 Bogojevo-Dunavska obala	408 Sombor-Bački Breg		410 (Višnjićevo)-Rasput.Rača-Sremska Rača	11 Paraćin-Stari Popovac	412 Surčin-Jakovo-Bečmen-(Boljevci)	413 (Bgd spoljna)-km 2+290-Fabrika šećera	Total:
			No	-	46 31.	52 31	60 31:	71 31.	81 317	67 313	78 319	48 320	70 321	63 32.	66 32:	53 40:	80 40	59 40:	61 40	58 407	72 403	73 409	79 410	68 411	77 41	57 41:	
				ட	Ĺ		Ľ		Ľ	Ĺ				Ľ	Ĺ	Ľ	Ľ		Ĺ	Ľ	Ĺ		ட	Ĺ	L		



Г		In-ground amplifiers	bcs	27	0	0	0	0	0	0	0	0	0	0	0 0	0	0	0	0 0	0	0	0 0	0	0	0	0	0	0 0	0	0	0	0	0	0	0	0	0	0	0 0	0	0	0	0	0	0	0
		Above ground amplifiers	pcs p	26 2	0	0	0	0	0	0	0	+	+	Н	0 0	0	0	0	0 0	0	0	0 0	0	0	0 0	+	0	0 0	0	0	0 0	-	0	+	0	0	Н	+	0 0	+	+	0	0	0	0	\vdash
				25	0	0	0	0	0	0	Н	+	0	Н	0 0	+	0	0	+	+	0	0 0	0	0	+	+	H	0 0	0	0	+		Н	+	0	0	0	+	+	0	+	0	0	+	+	0
	Digital telephone	s/iqW sst	type	24		KeymileUMUX STM-1				KeymileUMUX STM-1																																				
	Digital	s\tidM 8	type pcs	22 23	0	0	0	0	0	0	0	0	0	0	0 0	0	0	0	0 0	0	0	0 0	0	0	0 0	0	0	0 0	0	0	0 0	0	0	0	0 0	0	0	0	0 0	0	0	0	0	0	0 0	0
			pcs ty	21 2	0	0	0	0	0	0	0	0	0	0	0 0	0	0	0	0 0	0	0	0 0	0	0	0	0	0	0 0	0	0	0 0	0	0	0	0 0	0	0	0	0 0	0	0	0	0	0	0 0	0
VICES		s\ridM \(\(\zeta \)	type	20		siemens				siemens																			3																	
L DE	Γ		bcs	19	0	15	3	4	0	0	9	0	0	0	0	0	0	0	5 -	0	0	0 0	0	0	0	0	0	- 0	0	0	0	0	0	0	0	0	0	0	0 -	. 0	0	0	0	0	0	0
MULTI-CHANNEL DEVICE		fqsigələT	type	18	iskra	iskra	iskra	AUSO UTB ISKRA		iskra	siemens-WT100 EI		iskra	iskra		iskra												iskra											iskra	iskra						
		In-ground amplifiers	bcs	17	0	16	0	0	0	0	28	0	0	0	0	0	0	0	0	0	0	0 0	0	0	0	0	0	0 0	0	0	0	0	0	0	0	0	0	0	0 0	0	0	0	0	0	0	0
		Above ground amplifiers	bcs	16	0	28	5	Ξ	0	0	4	0	0	0	0	0	0	0	0	0	0	0 0	0	0	0	0	0	0 0	0	0	0	0	0	0	0	0	0	7	0 0	0	0	0	0	0	0	0
	91	CIANUMIA ZI IALO	bcs	15	0	4	0	0	0	0	4	0	0	0	0	0	0	0	0	0	0	0 0	0	0	0	0	0	0 0	0	0	0	0	0	0	0	0	0	0	0 0	0	0	0	0	0	0	0
	lephor	Over 12 channels	type	14	V300	V300					V300																																			
	gue te		bcs	13	0	91	3	4	0	0	2	- <	0	0	0 0	0	0	0	0 0	0	0	0 0	0	0	0	0	0	0 0	0	0	0	0	0	0	0 0	0	0	0	0 0	0	0	0	0	0	0 0	0
	Analogue telephone	Up to 12 channels	type	12	Z 12	Z12	Z 12	FPD12 Z12	VZ12k	Ausso	Z 12	Z 12																										Z12							I	
		nb to 3 channels	type pcs	10 11	0	z 3 0	0	0	0	Z3F 0	EI 1	23f 1	0	0	0 0	0	0	0 0	0	0	0	0 0	0	0	0 0	0	0	0 0	0	0	0	Kt3-1 0	0	0	0 0	0	Н	Z3F 2	0 0	Z3F 0	+	0	0	0 0	0	0
		Local		6	0	111,88	0	71,00	3,67	10,000	63,144	+	0	0		0	0	0	22 559	0	0	0 0	0	0	0 2000	0 0	0	0 0	1,500	0	4,451		0	14,5	0 0	0	H	93	0 0	8	÷	0	0	0	0 0	0
		Fiber optic	km	8	0	0	0	0	0	0	H	0 0	t	0	0 0	0	0	0	0 0		0	0 0	0		†	t	0	0 0	0 3	0			0	0	0 0	0	H	2	0 0	t		0	0	0	0 0	0
	Cable lines	ATZ	m	7	0	162,917	105,043	15,878	0	26,000	0	350	3,648	0	11.755	34,460	0	250		0	2,130	0 0	0	0	536	0	0	0 0	257	0	0 0	0	0	0	0 0	0	Н		26,4		0	0	0	0	0 0	0
SYSTEMS					190	168 162	105	,857 15,	621	26,	388	5,	3,		=	34		10			2,				9,				17.									2/	2						$\frac{1}{1}$	
CABLES		STKA	km	9	135,0	384,1	0	135,8	12,4	0	370,	0	0	0		0	0	0		0	0	0 0	0	0	0 0	5 0	0	0 0	0	0	1.5	0	0	0	0 0	0	0	0	0 0		0	0	0	0	0	0
	lines	Overhead cables	km	5	0	0	0	0	74,00	13,00	0	90,34	0	0	0 0	0	0	0	0	0	0	0 0	0	0	0 0	0	0	0 0	0	0	41,2	0	0	0	0 0	0	0	14,6	0 0	0	0	0	0	0	0	0
	Overhead lines	Two wire overhead lines iron	km	4	0	0	0	0	0	0	0	0	0	0	0 0	0	0	0	0 0	0	0	0 0	0	0	0	0	0	0 0	0	0	2,65	0	0	29	0 0	0	0	0	0 0	0	0	0	0	0	0	0
		Two-wire overhead lines SiBr	km	3	0	0	0	0	0	2,00	0	0	0	0	0	0	0	0		0	0	0	0	0	٥	0	0	0 0	0	0	0	0	0	0	0	0	0	0	٥	0	0	0	0	0	0	0
		RAILWAY LINE		2	BGD-Šid-State Border	BGD-Mladenovac-Niš-Preševo-State Border.	(BGD)-Rakovica-Jajinci-M.Krsna-V.Plana	(BGD)-S.Pazova-Indija-Subotica-State Border.	Niš-Dimitrovgrad-State Border.	BGD Centar-Pančevo-Vršac-State Border.	(BGD)-Resnik-Podgorica-Bar	Lapovo-Kraljevo-Đ.Janković-State Border.	Beograd Centar-Novi Beograd	BGD Centar-Rasputnica"G"-(Rakovica)	BGD Ranzima "A"-Ostružnica-Batajnica	BGD Ranžirna "A"-Rasp."B"-Rasp."K"-Resnik	Ostružnica-Rasp."B"-(Rasp."K"-Resnik)	BGD Ranzirna "B"-Rasp."R"-Rasp."A"	(BGD) Ranžima B J-Kasp. K -Kakovica	BGD Ranžima "B"-Rasputnica "T"-(Rakovica)	(BGD Ranz."A"-Ras.B)-Ras.K-Ras.K1-Jajinci	Foperder-Rasp.Savski Most-(Novi BGD) Tone-Blok 1Ohala-Blok 2 prel -Ras.Pan Most	(Topč)-Blok 1Obala-BGD Spoljna-Blok 2 prel	Vukov Sp.)-Ras.K.Park-Ras.Dedinje-(Rakov.)	Indija-Golubinci N Sad N Sad Danžima, Sailono Daen	Obilazni kolosek Mala Krsna	Lapovo Varoš-Lapovo Ranžirna-Lapovo	Trupale-Niš Ranžima-Međurovo	Niš-Rasputnica Most-(Niš Ranžirna)	(Cr.Krst-Skr.2)-Skr.3-Skr.4-(Cele Kula)	Subotica-Horgos-State Border. Pančevo Glavna-Zrenjanin-Kikinda-State Border.	Banatsko Miloševo-Senta-Subotica	Pančevo Varoš-Rasputnica "2a"-(Jabuka)	N.Sad-Sajlovo Rasputnica-Bogojevo	(N.Sad)-Sajl.RaspR.SančOrl.staj(Tomaš)	Orlovat-Rasputnica "1a"-(Lukićevo)	Ruma-Šabac-Rasp.Donja Borina-State Border.	Stalać-Kraljevo-Požega	Smederevo-Mala Krsna M Krsna-Bor-Rasputnica "2"-(Vražoornac)	Niš-Zaiečar- Prahovo pristanište	(Niš)-Doljevac-Kastrat-Rosovo Polje	Kuršumlija-Kastrat	(Barlovo)-Rasputnica "1"-Kuršumlija	Subotica-Subotica fabrika	Subotica-Subotica boinica Kanjiža-Horgoš	36 304 Novi Sad-Novi Sad Iožionica
r		lway line No	Rai		101	102 E	103 (104	105 1	106 E	-	108			113			116 E	_	_	$\overline{}$	121	+-	-	125 1		1	130		132 (_	203 E	204 F			208			214 3				_	301		304
r			oN	-	5	ю	4	2	22	9	+	_	7	\vdash	C 4	+	25	+	= 0		\vdash	+	27	+	19	+	+	30	+		43		44	$\overline{}$	36		+	$^{+}$	34	+	+	т,	\rightarrow	\neg	65	36
					<u> </u>		ш				ш	1	_	ш		_	Ш	_			ш		1	ш						\perp							\perp		_	1	_		1	-1	_	_



Complement Com	Г	П	In-ground amplificrs	bcs	12	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	٥
Confections Confections				-	26 2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Control of the cont				-	Н	H	Н	Н		Н	Н	_		Н	Н				H			_	Н	Н	_	_		Н	Н	Н	0		0	0	0
Part Part		telephone	sylidM 221																																
Column C		Digita	s/iidM 8			0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Continue Continue					21	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Cable lines Cable lines	EVICES		s\idM 2	-	20																														
Cohe lines Coh	EL DE			bcs	19	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	31
Cable Files Cable Files	MULTI-CHANN		Теведар	type	18																20. 77														
Cable lines Cable lines			In-ground amplifiers	bcs	17	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	4
Cable ESYSTEMS Cable ESY			Above ground amplifiers	bcs	91	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	20
Cable lines Cable lines		le le	S12111111112 71 1210	bcs	15	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	æ
Cable lines Cable lines		ephor	Over 12 channels	type	14																														
Cable lines Cable lines		ue tel		bcs	13	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	28
CABILE SYSTEMS Cable lines CABILE SYSTEMS Cable lines		Analog	Up to 12 channels	ty pe	12																														
CABLE SYSTEMS Cable lines			nb to c cusuucis	-	Ξ	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	4
CABLE SY STEMS Cable lines				type	10																20. 20														╝
Souther-Rasput Aspart Ray LINE Cable lines Cable lin			Гося	km	6	0	0	0	0	0	0	0	0	0	0	0	0	3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	427,07
Section Activities Activi		lines	Fiber optic	km	œ	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	72,950
Note Color	TEMS	Cable	ATS	km	7	0	0	0	0	0	0	0	0	0	0	0	0	9	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	507,024
South-Again Saren-Kovin Kerekov Varos-Panievo Vojovica Varos-Panievo Varos-Panievo Vojovica Varos-Panievo Varos-Panievo Vojovica Varos-Panievo V			STKA	km	9	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1041,453
RAILWAY LINE Rail		100	Overhead cables	km	5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	263,142
RAILWAY LINE		Overhead 1	Two wire overhead lines	km	4	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	31,650
1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1			Two-wire overhead lines SiBr	km	3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	2,000
\ \					2	15 Podbara-Rasput. "3"-Rasput. "2"-(Kać)	6 (Rim.Šančevi)-Rasput "1"-Rasput. "3"-(Podb.)	N Vrbas-Sombor		0 Sonta-Apatin fabrika-Strilić-(Sombor)		2 Bačka Palanka-Gajdobra			5 Kikinda-Banatsko Arandelovo			8 Pančevo Varoš-Pančevo Vojlovica				2 Markovac-Resavica		3 Alibunar-Seleuš	4 Vladimirovac-Kovin	35 Čoka-Novi Kneževac	6 Kikinda-MKS (ind.kolosek)					11 Paraćin-Stari Popovac	12 Surčin-Jakovo-Bečmen-(Boljevci)	(Bgd spoljna)-km 2+290-Fabrika šećera	Total
8 2 3 2 3 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8	L	ol Jine No				305	306	308	309	310	311	312	313	314	315	316	317	318	319	320	321	322	323	403	404	405	406	407	408	409	410	411	412	413	
	L			οN	-	37	45	33	69	74	54	55	46	52	09	71	81	29	78	48	20	63	99	53	80	59	61	28	72	73	42	89	22	57	



			RADIO DEVICE Locomotive dispatching T. C														
			Loc	omotive radio c		ching		Traffic	running	netwo	rks (2m	1)	Sta	tion rad	lio netw	orks (0	,7m)
	Railway line No	RAILWAY LINE	Exchange units (with railway line splitter)	Length of covered railway line	Trackside stations	Locomotive stations	Number of networks	Radio link	Repeaters	Fixed stations	Mobile stations	Movable stations	Number of networks	Repeaters	Fixed stations	Mobile stations	Movable stations
2 1	Ra	2	pcs 28	km 29	pcs 30	pcs 31	pcs 32	pcs 33	pcs 34	pcs 35	pes 36	pcs 37	pcs 38	pcs 39	pcs 40	pcs 41	pcs 42
5	101	BGD-Šid-State Border	1	100	8	0	0	0	0	0	0	0	8	0	8	0	21
3	102	BGD-Mladenovac-Niš-Preševo-State Border. (BGD)-Rakovica-Jajinci-M.Krsna-V.Plana	3	377 100	42 12	8	0	0	0	0	0	0	17	0	19	0	53
2	104 105	(BGD)-S.Pazova-Inđija-Subotica-State Border.	1	155	10	4	0	0	0	0	0	5	7	0	16	0	74 12
6	106	Niš-Dimitrovgrad-State Border. BGD Centar-Pančevo-Vršac-State Border.	0	20	4	0	1	0	1	13	0	0 4	4	0	3	0	11
20	107 108	(BGD)-Resnik-Podgorica-Bar Lapovo-Kraljevo-Đ.Janković-State Border.	0	176 0	35 0	0	0	0	0	0 16	0	0	14	0	13	4	35 0
26	109	Subotica-Bogojevo-State Border.	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
7	110	Beograd Centar-Novi Beograd BGD Centar-Rasputnica"G"-(Rakovica)	0	10	2	164	0	0	0	0	0	0	0	0	0	10	0
15	112	BGD Ranžirna "A"-Ostružnica-Batajnica	0	20	2	0	0	0	0	0	0	0	0	0	0	0	0
14	113	BGD Ranžirna."B"-Ostružnica BGD Ranžirna "A"-Rasp."B"-Rasp,"K"-Resnik	0	20	3	0	0	0	0	0	0	0	0	0	0	0	0
25	115	Ostružnica-Rasp."B"-(Rasp."K"-Resnik)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
10	116 117	BGD Ranžirna "B"-Rasp."R"-Rasp."A" (BGD Ranžirna "B")-Rasp."R"-Rakovica	0	8	0	0	0	0	0	0	0	0	6	0	3	0	19
9	118 119	(BGD)-BGD Ranžirna "A"-Rasp."T"-Rakovica	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
16	120	BGD Ranžirna "B"-Rasputnica "T"-(Rakovica) (BGD Ranz."A"-Ras.B)-Ras.K-Ras.K1-Jajinci	0	0	0	0	0	0	0	0	0	0	3	0	5	0	12
29	121	Topčider-Rasp.Savski Most-(Novi BGD)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
28 27	122	TopčBlok 1Obala-Blok 2 prelRas.Pan.Most (Topč)-Blok 1Obala-BGD Spoljna-Blok 2 prel	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
31 19	124 125	(Vukov Sp.)-Ras.K.Park-Ras.Dedinje-(Rakov.) Inđija-Golubinci	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
24	126	N.Sad-N.Sad Ranžirna-Sajlovo Rasp.	0	0	0	0	0	0	0	0	0	0	4	0	4	0	11
41 21	127 128	Obilazni kolosek Mala Krsna Lapovo Varoš-Lapovo Ranžirna-Lapovo	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
30	129	Trupale-Niš Ranžirna-Međurovo	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
17 23	130	Crveni Krst-Niš Ranžirna Niš-Rasputnica Most-(Niš Ranžirna)	0	0	0	0	0	0	0	0	0	0	5	0	8	0	19
18	132	(Cr.Krst-Skr.2)-Skr.3-Skr.4-(Ćele Kula)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
51 43	201	Subotica-Horgoš-State Border. Pančevo Glavna-Zrenjanin-Kikinda-State Border.	0	0	0	0	0	0	2	0	0	0	0	0	0	0	0
32	203	Banatsko Miloševo-Senta-Subotica	0	0	0	0	1	0	2	8	0	6	0	0	0	0	0
44 39	204	Pančevo Varoš-Rasputnica "2a"-(Jabuka) N.Sad-Sajlovo Rasputnica-Bogojevo	0	0	0	0	0	0	0	0	0	0	0	0	0	0	2
40	206	(N.Sad)-Sajl.RaspR.ŠančOrl.staj(Tomaš)	0	0	0	0	1	0	2	18	0	4	0	0	0	0	0
38 42	207	N.Sad Ranžirna-Sajlovo Rasputnica Orlovat-Rasputnica "1a"-(Lukićevo)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
47	209	Ruma-Šabac-Rasp.Donja Borina-State Border.	0	0	0	0	1	0	1	8	0	2	2	0	2	0	5
50 49	211	Stalać-Kraljevo-Požega Smederevo-Mala Krsna	0	0	0	0	0	0	0	0	0	0	0	0	0	0	12
34 35	215 216	M.Krsna-Bor-Rasputnica "2"-(Vražogrnac)	0	0	0	0	0	0 2	0 2	0 14	0	0	0	0	0	0	0 5
64		Niš-Zaječar- Prahovo pristanište (Niš)-Doljevac-Kastrat-Kosovo Polje	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
62 56	219 220	Kuršumlija-Kastrat (Barlovo)-Rasputnica "1"-Kuršumlija	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
76	301	Subotica-Subotica fabrika	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
75 65	302	Subotica-Subotica bolnica Kanjiža-Horgoš	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
36	304	Novi Sad-Novi Sad ložionica	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
37 45	305 306	Podbara-Rasput. "3"-Rasput. "2"-(Kać) (Rim.Šančevi)-Rasput "1"-Rasput. "3"-(Podb.)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
33	308	Vrbas-Sombor	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
69 74	309 310	Petrovaradin-Beočin Sonta-Apatin fabrika-Strilić-(Sombor)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
54 55	311 312	Bač-Karavukovo Bačka Palanka-Gajdobra	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
46	313	(Ruma)-Rasp.Donja Borina-Zvornik Grad	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
52 60	314 315	Šid-Sremska Rača Nova-State Border. Kikinda-Banatsko Aranđelovo	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
71	316	Sečanj-Jaša Tomić	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
81 67	317	(Zrenjanin)-Zrenjanin fabr.Vršac-Bela Crkva Pančevo Varoš-Pančevo Vojlovica	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
78	319	(Uljma)-RaspA-RaspB-(Jasenovo)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
48 70	320 321	Senta-Odvojna skr. 22 Senta (Požarevac)-Rasput.Sopot PožKostolac	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
63 66	322 323	Markovac-Resavica	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
53	403	Ovča-Padinska Skela Alibunar-Seleuš	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
80 59	404 405	Vladimirovac-Kovin Čoka-Novi Kneževac	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
61	406	Kikinda-MKS (ind.kolosek)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
58 72	407 408	Bogojevo-Dunavska obala Sombor-Bački Breg	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
73	409	Sombor-Ridica	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
79 68	410	(Višnjićevo)-Rasput.Rača-Sremska Rača Paraćin-Stari Popovac	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
77	412	Surčin-Jakovo-Bečmen-(Boljevci)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
57	413	(Bgd spoljna)-km 2+290-Fabrika šećera Total:	9	996	0 122	0 176	0 8	0 2	0 11	0 89	0 4	0 27	0 83	6	95	0 20	0 298
ш_		- J.M.I.	,	770		1/0		-		07	-	2/	63	U	73	20	~ 20



Appendix 3.8. List of service points where it is possible to perform the transshipment of dangerous goods

The user or the authorized person is liable for safe transshipment and provision of required permits for transshipment issued by the competent authorities (ministry, local self-government, etc.) in case such permits are prescribed by law or by-laws. The Infrastructure Manager is not obliged to control permits and approvals issued by the competent authorities. In case of an accident during transshipment, the user or authorized person undertakes all necessary measures for making handling point functional.

Transshipment of the respective dangerous goods may be carried out on the handling point (handling area, ramp), i.e. the facility placed beside the track referred to in column 3, Table 1 of this Appendix. Transshipment shall be performed in compliance with the applicable regulations of the Republic of Serbia in the field of transport of dangerous goods, health and safety at work, environmental protection, waste treatment, fire protection, etc., complying with the essential safety measures which shall be provided as follows:

Keeping, disposal and storage of dangerous goods in the area of service point, including handling point is prohibited.

The handling point where transshipment is carried out must be enclosed or in any other way separated from passenger transport or from the handling point (loading, unloading, transshipment) with the goods not classified as dangerous (not RID). If a handling point is not enclosed, the client must mount movable fence which shall be removed upon handling (made of plastic orange material used in construction).

The handling point where transshipment is carried out shall have "RID – warning plate on the handling point". In case an IŽS' service point, within which there is the place of handling with dangerous goods, does not have "RID – warning plate on the handling point", the user of the handling point (consignee, consignor or authorized person) is obliged to provide the said plate at their own expense during the entire period of handling. The plate shall be made of sheet, with red colour base, on which the text with white letter is inscribed. The text shall read: RID WARNING – HANDLING WITH DANGEROUS GOODS. Minimum plate size is 600x500 mm. The plate shall look like as indicated:

*RID*WARNING
HANDLING WITH DANGEROUS GOODS

Transshipment of the dangerous goods is carried out during the visible part of day, but it may be performed at night, with electrical lighting whereby the electrical devices that cannot cause fire or explosion may be used. In case an IŽS service point, within which there is the point of handling with dangerous goods does not have capacity for electrical lighting, the user of the handling point shall be obliged to provide necessary lighting at their own expense during the entire period of handling.

In case that said track is under OCL, during transshipment the voltage must be turned off and the track shall be secured in a duly manner.

Road vehicle engine shall be turned off during transshipment.



The disposal of the flammable and material which may cause or intensify fire is prohibited. Furthermore, it is forbidden to dirty the handling area with oil or oil derivatives (out of road freight vehicle).

Fire lighting or work with any open flame, use of tools which sparks and the devices with burner as well as smoking are forbidden during transshipment.

The user of the handling point (consignee, consignor or the authorized person) is obliged to perform cleaning and remove waste, which has been generated during the process of handling with dangerous goods, to the dumpsite, upon the completion of handling activities, in accordance with the Law on Waste Management, Law on Environmental Protection and other legislation and bylaws in the field of environmental protection. In case the user of authorized person does not clean the area after transshipment and does not take waste to the respective dumpsite outside the station, the railway undertaking shall perform cleaning.

The user of the handling point is obliged that, in the process of handling with dangerous goods, comply with the Law on Transport of Dangerous Goods and Law on Protection at Work (to take care on safety and health at work of their employees on the handling point), and particularly to get them acquainted, in a proven manner, with the hazards of stay in railway area (general safety of movement in IŽS's service points, way of conduct in service points, restrictions in movement, hazards from high voltage and other hazards).

Simultaneous transshipment at the same place of handling with dangerous goods of different classes is forbidden.

The service points where transshipment of certain dangerous goods from railway wagons into road vehicle and vice versa is performed are given in the Table of this Appendix.

Upon the request of the interested parties, Infrastructure of Serbian Railways JSC may approve transshipment of other dangerous goods, as well as in service points not given in the Table of this Appendix, in case there are conditions met for handling in the service point, and if the approval of the competent authority is provided for the goods that are being transshipped if it is prescribed by the law (ministries, local self-government units, , i.e. the Ministry of Interior's services).

For more information please contact:

"Infrastructure of Serbian Railways" JSC Traffic Department 6 Nemanjina St., 11000 Belgrade, Serbia Phone/Fax:+381 11 36 18 214 E-mail:sektor.sp@srbrail.rs

The table consists of 7 columns, with the following content:

- column No 1 ,,ordinal No";
- column No 2 ,, Name of a service point";
- column No 3 "Track", contains ordinal number or name of track in accordance with Station regulations (transport dispatching point or loading point);
- columns 4, 5 and 6 "Dangerous goods", contain NHM code, UN item/number for indication of hazards and class of dangerous goods, whose transshipment may be carried out;
- column No 7 "Notes", contains specific information relating to specific boxes.



Table: List of service points open for transshipment of dangerous goods

1 401	e: List of service points or		Dangerous goo			
	Name of service point	Track	NHM	/ number hazards cation	Class	Notes
°Z				for		
1	2	3	4	5	6	7
1.	Adrovac	1	3105 20 3102 30	2067/50 1942/50	5.1 5.1	
2.	Aleksinac	1	3105 20 3102 30	2067/50 1942/50	5.1 5.1	
3.	Bagrdan	6	3105 20 3102 30	2067/50 1942/50	5.1 5.1	
4.	Bačka Topola	1, 5, 7	3105 20 3102 30	2067/50 1942/50	5.1 5.1	
5.	Bor Freight	1	3105 20 3102 30	2067/50 1942/50	5.1 5.1	
6.	Valjevo	II line	3105 20 3102 30	2067/50 1942/50	5.1 5.1	
7.	Velika Plana	1	3105 20 3102 30	2067/50 1942/50	5.1 5.1	
8.	Vranje	1	3105 20 3102 30	2067/50 1942/50	5.1 5.1	
9.	Vršac	11, 19	3105 20 3102 30	2067/50 1942/50	5.1 5.1	
10.	Grejač	1	3105 20 3102 30	2067/50 1942/50	5.1 5.1	
11.	Žednik	1, 6a	3105 20 3102 30	2067/50 1942/50	5.1 5.1	
12.	Zmajevo	5	3105 20 3102 30	2067/50 1942/50	5.1 5.1	
13.	Zrenjanin	1, 10	3105 20 3102 30	2067/50 1942/50	5.1 5.1	
14.	Zrenjanin Factory	1	3105 20 3102 30	2067/50 1942/50	5.1 5.1	
15.	Jagodina	1, 8	3105 20 3102 30	2067/50 1942/50	5.1 5.1	
16.	Kikinda	20, 21	3105 20 3102 30	2067/50 1942/50	5.1 5.1	
17.	Kula	1	3105 20	2067/50	5.1	
18.	Lapovo	1	3102 30 3105 20 3103 30	1942/50 2067/50	5.1	
19.	Lapovo marshalling yard	Station for	3102 30 3105 20 3102 30	1942/50 2067/50	5.1	
20.	Leskovac	disinfecting New track	3102 30 3105 20 3102 30	1942/50 2067/50	5.1	
21.	Lešak	1 short	3102 30 3105 20	1942/50 2067/50	5.1	
22.	Mala Krsna	1	3102 30 3105 20	1942/50 2067/50	5.1	
23.	Mladenovac	1, 7	3102 30 3105 20	1942/50 2067/50	5.1	
23.	iviladellovae	1, /	3102 30	1942/50	5.1	



24. Novi Sad Marshalling Yard Novi Sad Marshalling Yard 2, 3, 4, 7 Locomotive and freight stations 2806 10 1789/80 8 2806 10 1789/80 8 2806 10 1789/80 8 2806 10 1789/80 8 2808 00 2031/80 8 2809 20 1805/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 2815 12	
24. Novi Sad Marshalling Yard 2, 3, 4, 7 2806 10 1789/80 8 1824/80 1824/80	
24. Novi Sad Marshalling Yard 2, 3, 4, 7 Locomotive and freight stations 2815 12 1824/80 8 2815 11 1823/80 8 2809 20 1805/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 2815 12	
24. Novi Sad Marshalling Yard 23, 3, 4, 7 Locomotive and freight stations 2815 12 1824/80 8 2815 11 1823/80 8 2809 20 1805/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 1823/80 8 2815 11 2815 12 28	
24. Nov1 Sad Marshalling Yard	
Freight stations	
2809 20	
2815 11	
2828 90 1791/80 8	
25. Ostružnica 1 3105 20 30 1942/50 5.1 5.1 3102 30 1942/50 5.1 26. Palanka 1 3105 20 2067/50 5.1 5.1 27. Pančevo varoš 1 3105 20 2067/50 5.1 2067/50 5.1 27. Pančevo Main St. 20, 21 3105 20 2067/50 5.1 2067/50 5.1 5.1 28. Pančevo Main St. 20, 21 3105 20 2067/50 5.1 2067/50 5.1 5.1 29. Paraćin 1 3105 20 2067/50 5.1 5.1 30. Pirot 1 3105 20 2067/50 5.1 5.1 31. Požarevac 1 3105 20 2067/50 5.1 5.1 31. Požarevac 1 3105 20 2067/50 5.1 5.1 32. Požega 19 3102 30 20 2067/50 5.1 5.1 33. Prijepolje Freight 13 3105 20 20 2067/50 5.1 5.1 34. Prokuplje 1 3105 20 20 2067/50 5.1 5.1 35. Resavica Right dead-end 3105 20 2067/50 5.1 2067/50 5.1 36. Ruma 1, 2	
25. Ostruznica	
26. Palanka 1 3105 20 2067/50 5.1	
26. Palanka 1 3102 30 1942/50 5.1	
27. Pančevo varoš 1 3102 30 1942/50 5.1	
27. Pancevo varos 1 3102 30 1942/50 5.1 28. Pančevo Main St. 20, 21 3105 20 2067/50 5.1 29. Paraćin 1 3105 20 2067/50 5.1 30. Pirot 1 3102 30 1942/50 5.1 31. Požarevac 1 3105 20 2067/50 5.1 31. Požarevac 1 3105 20 2067/50 5.1 32. Požega 19 3102 30 1942/50 5.1 33. Prijepolje Freight 13 3105 20 2067/50 5.1 34. Prokuplje 1 3105 20 2067/50 5.1 35. Resavica Right dead-end 3105 20 2067/50 5.1 36. Ruma 1, 2 3102 30 1942/50 5.1 37. Svilajnac 1 3105 20 2067/50 5.1 38. Senta 1, 10,11 3105 20 2067/50 5.1	
27. Pancevo varos 1 3102 30 1942/50 5.1 28. Pančevo Main St. 20, 21 3105 20 2067/50 5.1 29. Paraćin 1 3105 20 2067/50 5.1 30. Pirot 1 3102 30 1942/50 5.1 31. Požarevac 1 3105 20 2067/50 5.1 31. Požarevac 1 3105 20 2067/50 5.1 32. Požega 19 3102 30 1942/50 5.1 33. Prijepolje Freight 13 3105 20 2067/50 5.1 34. Prokuplje 1 3105 20 2067/50 5.1 35. Resavica Right dead-end 3105 20 2067/50 5.1 36. Ruma 1, 2 3102 30 1942/50 5.1 37. Svilajnac 1 3105 20 2067/50 5.1 38. Senta 1, 10,11 3105 20 2067/50 5.1	
28. Pančevo Main St. 20, 21 3105 20 3102 30 1942/50 5.1 5.1 1942/50 5.1 29. Paraćin 1 3105 20 2067/50 5.1 3102 30 1942/50 5.1 5.1 3102 30 1942/50 5.1 30. Pirot 1 3105 20 2067/50 5.1 3102 30 1942/50 5.1 5.1 3102 30 1942/50 5.1 31. Požarevac 1 3105 20 2067/50 5.1 3102 30 1942/50 5.1 5.1 3102 30 1942/50 5.1 32. Požega 19 3102 30 1942/50 5.1 1942/50 5.1 5.1 1942/50 5.1 33. Prijepolje Freight 13 3105 20 2067/50 5.1 1942/50 5.1 5.1 1942/50 5.1 34. Prokuplje 1 3105 20 2067/50 5.1 1942/50 5.1 5.1 100/50 5.1 100/50 5.1 35. Resavica Right dead-end 3105 20 2067/50 5.1 100/	
28. Pancevo Main St. 20, 21 3102 30 1942/50 5.1 29. Paraćin 1 3105 20 2067/50 5.1 30. Pirot 1 3105 20 2067/50 5.1 31. Požarevac 1 3105 20 2067/50 5.1 32. Požega 19 3105 20 2067/50 5.1 33. Prijepolje Freight 13 3105 20 2067/50 5.1 34. Prokuplje 1 3105 20 2067/50 5.1 35. Resavica Right dead-end 3105 20 2067/50 5.1 36. Ruma 1, 2 3102 30 1942/50 5.1 37. Svilajnac 1 3105 20 2067/50 5.1 38. Senta 1, 10,11 3105 20 2067/50 5.1 3102 30 1942/50 5.1 3102 30 1942/50 5.1	
29. Paraćin 1 3105 20 30 1942/50 5.1 1942/50 5.1 30. Pirot 1 3105 20 2067/50 5.1 1942/50 5.1 31. Požarevac 1 3105 20 2067/50 5.1 1942/50 5.1 32. Požega 19 3105 20 2067/50 5.1 1942/50 5.1 33. Prijepolje Freight 13 3105 20 2067/50 5.1 1942/50 5.1 34. Prokuplje 1 3105 20 2067/50 5.1 1942/50 5.1 35. Resavica Right dead-end 105 20 2067/50 5.1 1942/50 5.1 36. Ruma 1, 2 3105 20 2067/50 5.1 1942/50 5.1 37. Svilajnac 1 3105 20 2067/50 5.1 1942/50 5.1 38. Senta 1, 10,11 3105 20 2067/50 5.1 1942/50 5.1	
29. Paracin 1 3102 30 1942/50 5.1 30. Pirot 1 3105 20 2067/50 5.1 31. Požarevac 1 3105 20 2067/50 5.1 32. Požega 19 3102 30 1942/50 5.1 33. Prijepolje Freight 13 3105 20 2067/50 5.1 34. Prokuplje 1 3105 20 2067/50 5.1 35. Resavica Right dead-end track 3102 30 1942/50 5.1 36. Ruma 1, 2 3105 20 2067/50 5.1 37. Svilajnac 1 3105 20 2067/50 5.1 38. Senta 1, 10,11 3105 20 2067/50 5.1 3102 30 1942/50 5.1 5.1 5.1 3102 30 1942/50 5.1 5.1 5.1 3102 30 1942/50 5.1 5.1 5.1 5.1 32. Resavica 1 3105 20 2067/50 5.1 5.1	
3102 30 1942/50 5.1 3105 20 2067/50 5.1 3102 30 1942/50 5.1 3102 30 3102 30 3102/50 5.1 3102/50	
30. Pirot 1 3102 30 1942/50 5.1 31. Požarevac 1 3105 20 2067/50 5.1 32. Požega 19 3102 30 2067/50 5.1 33. Prijepolje Freight 13 3102 30 1942/50 5.1 34. Prokuplje 1 3105 20 2067/50 5.1 35. Resavica Right dead-end track 3102 30 1942/50 5.1 36. Ruma 1, 2 3105 20 2067/50 5.1 37. Svilajnac 1 3105 20 2067/50 5.1 38. Senta 1, 10,11 3105 20 2067/50 5.1 3102 30 1942/50 5.1 3102 30 1942/50 5.1	
31. Požarevac 1 3105 20 2067/50 5.1	
31. Pozarevac 1 3102 30 1942/50 5.1 32. Požega 19 3102 30 2067/50 5.1 33. Prijepolje Freight 13 3105 20 2067/50 5.1 34. Prokuplje 1 3105 20 2067/50 5.1 35. Resavica Right dead-end track 3102 30 1942/50 5.1 36. Ruma 1, 2 3102 30 1942/50 5.1 37. Svilajnac 1 3105 20 2067/50 5.1 38. Senta 1, 10,11 3105 20 2067/50 5.1 3102 30 1942/50 5.1 5.1 3102 30 1942/50 5.1 3102 30 1942/50 5.1 38. Senta 1, 10,11 3105 20 2067/50 5.1 3102 30 1942/50 5.1 5.1	
3102 30	
32. Požega 19 3105 20 3102 30 1942/50 5.1 1942/50 5.1 33. Prijepolje Freight 13 3105 20 3102 30 1942/50 5.1 1942/50 5.1 34. Prokuplje 1 3105 20 2067/50 5.1 1942/50 5.1 1942/50 5.1 1942/50 5.1 35. Resavica Right dead-end 3105 20 2067/50 5.1 1942/50	
32. Požega 19 3102 30 3102 30 1942/50 5.1 5.1 1942/50 5.1 33. Prijepolje Freight 13 3105 20 3102 30 1942/50 5.1 2067/50 5.1 1942/50 5.1 34. Prokuplje 1 3105 20 2067/50 5.1 1942/50 5.1 35. Resavica Right dead-end track 3105 20 2067/50 5.1 1942/50 5.1 36. Ruma 1, 2 3105 20 2067/50 5.1 1942/50 5.1 1942/50 5.1 37. Svilajnac 1 3105 20 2067/50 5.1 1942	
3102 30	
33. Prijepolje Freight 13 3105 20 30 1942/50 5.1 5.1 1942/50 5.1 34. Prokuplje 1 3105 20 2067/50 5.1 1942/50 5.1 35. Resavica Right dead-end track 3105 20 3102 30 1942/50 5.1 2067/50 5.1 1942/50 5.1 36. Ruma 1, 2 3105 20 2067/50 5.1 1942/50 5.1 37. Svilajnac 1 3105 20 2067/50 5.1 1942/50 5.1 1942/50 5.1 38. Senta 1, 10,11 3105 20 20 2067/50 5.1 1942/50 5.1	
33. Prijepolje Freight 13 3102 30 1942/50 5.1 34. Prokuplje 1 3105 20 2067/50 5.1 35. Resavica Right dead-end track 3105 20 2067/50 5.1 36. Ruma 1, 2 3105 20 2067/50 5.1 37. Svilajnac 1 3102 30 1942/50 5.1 38. Senta 1, 10,11 3105 20 2067/50 5.1 3102 30 1942/50 5.1 3102 30 1942/50 5.1 3102 30 1942/50 5.1	
34. Prokuplje 1 3102 30 1942/50 5.1 35. Resavica Right dead-end track 3105 20 2067/50 5.1 36. Ruma 1, 2 3105 20 2067/50 5.1 37. Svilajnac 1 3105 20 2067/50 5.1 38. Senta 1, 10,11 3105 20 2067/50 5.1 3102 30 1942/50 5.1 3102 30 1942/50 5.1 3102 30 1942/50 5.1 3102 30 1942/50 5.1 3102 30 1942/50 5.1 3102 30 1942/50 5.1	
34. Prokupije 1 3102 30 1942/50 5.1 35. Resavica Right dead-end track 3105 20 2067/50 5.1 36. Ruma 1, 2 3105 20 2067/50 5.1 37. Svilajnac 1 3105 20 2067/50 5.1 38. Senta 1, 10,11 3105 20 2067/50 5.1 3102 30 1942/50 5.1 3102 30 1942/50 5.1 3102 30 1942/50 5.1	
35. Resavica Right dead-end track 3102 30 1942/50 5.1 36. Ruma 1, 2 3105 20 2067/50 5.1 37. Svilajnac 1 3105 20 2067/50 5.1 38. Senta 1, 10,11 3105 20 2067/50 5.1 3105 20 2067/50 5.1 3105 20 2067/50 5.1 3105 20 2067/50 5.1 3102 30 1942/50 5.1 3102 30 1942/50 5.1	
35. Resavica track 3102 30 1942/50 5.1 36. Ruma 1, 2 3105 20 2067/50 5.1 37. Svilajnac 1 3105 20 2067/50 5.1 38. Senta 1, 10,11 3105 20 2067/50 5.1 3102 30 1942/50 5.1 3102 30 1942/50 5.1 3102 30 1942/50 5.1	
35. Resavica track 3102 30 1942/50 5.1 36. Ruma 1, 2 3105 20 2067/50 5.1 37. Svilajnac 1 3105 20 2067/50 5.1 38. Senta 1, 10,11 3105 20 2067/50 5.1 3102 30 1942/50 5.1 3102 30 1942/50 5.1 3102 30 1942/50 5.1	
36. Ruma 1, 2 3105 20	
36. Ruma 1, 2 3102 30 1942/50 5.1 37. Svilajnac 1 3105 20 2067/50 5.1 38. Senta 1, 10,11 3105 20 2067/50 5.1 3102 30 1942/50 5.1 3102 30 1942/50 5.1	
37. Svilajnac 1 3105 20 30 1942/50 5.1 5.1 1942/50 5.1 38. Senta 1, 10,11 3105 20 2067/50 5.1 1942/50 5.1	
37. Sviiajnac 1 3102 30 1942/50 5.1 38. Senta 1, 10,11 3105 20 2067/50 5.1 3102 30 1942/50 5.1	
38. Senta 1, 10,11 3105 20 2067/50 5.1 3102 30 1942/50 5.1	
38. Senta 1, 10,11 3102 30 1942/50 5.1	
3102.30 1942/50 5.1	
39. Sombor 20, 21 3105 20 2067/50 5.1	
39. Somoor 3102 30 1942/50 5.1	
2105 20 2067/50 5 1	
40. Sremska Mitrovica 1,9 3103 20 2007/30 5.1 1942/50 5.1	
3105 20 2067/50 5 1	
1 Al Stalac I short track	
3102 30 1942/50 5.1	
42. Subotica 1, 33, 34 and 36 3105 20 2067/50 5.1	
freight station 3102 30 1942/50 5.1	
43. Ćićevac 1 3105 20 2067/50 5.1	
3102 30 1942/30 5.1	
2105.20 2067/50 5.1	
44. Cuprija 1 3103 20 2007/30 3.1 3102 30 1942/50 5.1	
3105 20 2067/50 5 1	
43 1 7100 Hre1011	
46. Čačak 1-dead-end track 3105 20 2067/50 5.1	
3102 30 1942/50 5.1	
47. Šabac 1,7 3105 20 2067/50 5.1	
3102 30 1942/50 5.1	



48.	Stara Pazova	7	3102 30	1942/50	5.1	
49.	Kruševac	1	3105 20	2067/50	5.1	
49.	Kiusevac	1	3102 30	1942/50	5.1	
50.	Vrbas	10,11	3105 20	2067/50	5.1	
51.	Daimal	1	3105 20	2067/50	5.1	Only for goods
31.	Bajmok	1	3102 30	1942/50	5.1	in sacks
52.	Eutoa	1	3105 20	2067/50	5.1	
32.	Futog	1	3102 30	2007/30	5.1	



Appendix 3.9. Alternative transport routes

No	Regular route	Distance (km)	Alternative route	Distance (km)
1	Subotica-Novi Sad	98.5	Subotica-Sombor-Vrbas-Novi Sad	150.5
2	Subotica-Novi Sad	98.5	Subotica-Sombor-Bogojevo-Novi Sad	165.4
3	Subotica-Novi Sad	98.5	Subotica-Zrenjanin-N.Sad	230.6
4	Subotica-Belgrade	175.6	Subotica-Zrenjanin-Pančevo- Belgrade	234.6
5	Novi Sad-Belgrade	77.1	Novi sad-Orlovat-Pančevo-Belgrade	148
6	Kikinda-Subotica	96.4	Kikinda-Orlovat-N.Sad-Subotica	271
7	Belgrade-Lapovo	109.6	Belgrade-Požega-Kraljevo-Lapovo	306.1
8	Belgrade-Lapovo-Kraljevo	194.3	Belgrade-Požega-Kraljevo	221.4
9	Belgrade-Niš	243.5	Belgrade-Požarevac-Zaječar-Niš	372.9
10	Belgrade-Požega	154.9	Belgrade-Lapovo-Kraljevo-Požega	260.8
11	Belgrade-Požega-Vrbnica(ŽCG)	299.3	Belgrade-Lapovo-Kraljevo-Požega- Vrbnica(ŽCG)	405.2
12	Belgrade-Smederevo	83.1	Belgrade-Mladenovac-V.Plana- Smederevo	132.8

Note: For departure/terminal station the names of the nodes are given, and various service points may be comprised within the respective node.



Appendix 3.10. Facilities for rolling stock maintenance

Maintenance of railway vehicles is performed in accordance with the Rulebook on Railway Vehicle Maintenance ("Official Gazette of RS", No 144/20).

Service facilities for provision of the basic services- where the works on the maintenance of vehicles are executed, and which are not carried out regularly as the part of daily activities requiring the vehicle to be detached from traffic are the organizational units of the other companies and Infrastructure of Serbian Railways JSC does not provide this type of services.

In accordance with the available data, service facilities and basic maintenance services provided by the Joint Stock Company for Passenger Railway Transport "Srbija Voz", Belgrade are as follows:

Location	Address	Facility	Primary Purpose	Basic Information
	Milana	Depot Zemun	Maintenance of electric rolling stock and passenger coaches	Area: 10.200 m2 6 tracks of unit length 220 m
Zemun	Rešetara bb	Depot for underfloor wheel lathe	Wheel processing of rolling stock	Area: 350 m2 It has underfloor wheel lathe without dismantling of wheel-sets
		Workshop	Regular maintenance of electric and diesel locomotives	Area: 85 m2 Disposes of service canal of 36m and platform but without a canopy
Lapovo	Lava Tolstoja 10	Maintenance depot	Maintenance of electric and diesel locomotives and motor trains	Area: 1.part 1088 m2 and second part 625 m2 It has two running lines 2 out of which there are two canals on one line in the length of 50m and 20m. It disposes of single-axle weighbridge for measuring and adjusting the axle load of the rolling stock.
Sombor	Braće Miladinom 1	Hangar Depot for	Maintenance of DMUs, and may be used for maintenance of freight wagons and diesel locomotives	Area:1337,5 m2 It has two tracks of the length 78 m and 24 m; it disposes of underfloor wheel lathe for wheel processing on rolling stock without dismantling. Area: 687 m2 has 1 track in the length
		railbuses	Maintenance of railbuses and	of 78 m Area: 277 m2
Zrenjanin	Dr Vase	Depot for railbuses	replacement of wheel-sets of 711 DMUs	1 canal in the length of 27 m
Zicijanin	Stajica 2	Depot for DMUs	Maintenance of DMUs	Area: 432 m2 1 track in the length of 34 m
Vršac	Pavliški put bb	Depot for maintenance of rolling	Inspections and extraordinary repairs of smaller scope on diesel traction units and	Area: 787 m2 Two tracks in the length of 40 m



		stock	DMUs, as well as the overhauls of freight wagons	
Zaječar	Železnička bb	Workshop for repair of locomotives	Maintenance of diesel traction units and freight wagons	Area: 1250 m2 4 track out of which two are, unit length- 50 m

For more information on the provision of basic services in the above facilities responsible is their user in "Srbija Voz", Belgrade, Department for Rolling Stock Maintenance.

Contact point: Director of Department for Rolling Stock Maintenance - Mr. Vladan Petrović

Address: 6 Nemanjina St. 11000 Belgrade, Serbia

E-mail: vladan.petrovic@srbrail.rs

Phone: +381 64 845 22 64

Information on the service facilities and services provided by the Joint Stock Company for Freight Railway Transport "Srbija Kargo", are available on the web-site: http://www.srbcargo.rs/rs/usluzni-objekti. Information on the service facility and services provided by Šinvoz is available on the website www.sinvoz.rs.



Appendix 3.10a. Information on the service facility managed by Nelt Co



Nelt Co d.a.a. Maršala Tita 206 P. fah 530 11272 Dobanovci Srbija t+381 11 3779 100 f+381 11 3779 140 office@neltcom www.neltcom www.neltlsors

PIB 100037645 MB 17304712

Sektor za pristup železničkoj infrastrukturi Nemanjina 6, Srbija Datum: 21.12.2020.

PREDMET: INFORMACIJE O USLUŽNOM OBJEKTU – Industrijski kolosek "NELT Co", koji je deo Nelt Terminala

U stanici Surčin na pruzi Beograd Ranžirna, Park B - Ostružnica - Batajnica za javnu železiničku infrastrukturu kojom upravlja "Infrastruktura Železnice Strbije" ad priključen je industrijski kolosek čiji je vlasnik "Nelt.Co." d.o.o. Beograd.

Industrijski kolosek je namenjen samo za prijem i otpremu kolskih pošiljaka i isti se ne koristi za potrebe prevoza opasnih materija.

Industrijski kolosek počinje u nastavku četvrtog koloseka stanice Surčin odvojnom skretnicom br:2, u km. 14+166,57 pruge Beograd Ranžirna A– Ostružnica – Batajnica. Industrijski kolosek "NELT Co" doo Beograd, odvaja se od javne železničke infrastrukture, kojom upravlja "Infrastruktura Železnice Srbije" ad, u stanici Surčin koja je nalazi u km 14+635,60 (sredina stanične zgrade) jednolosečne elektrificirane pruge Beograd Ranžirna, Park B - Ostružnica - Batajnica.

Skretnica br. 1c industrijskog koloseka "NELT Co" doo Beograd , matični kolosek razdvaja na dva kraka odnosno na dva koloseka

Industrijski kolosek je ukupne građevinske dužine 1293,31m i sastoji se od tri dela i to:

- matičnog koloseke građevinske dužine 616,00 m
- Kolosek I građevinske dužine 348,00 m
- Kolosek II građevinske dužine 343,31 m

Koloseci I i II imaju korisnu dužinu svaki po 300 m tako da je ukupna korisna dužina na industrijskom koloseku 600 m.

Industrijski kolosek oposobljen je za kategoriju pruge C2 odnosno za:

- najveću dozvoljenu masu po osovini do 20 t/os (200 kN/os) i
- najveću dozvoljenu masu dužnom metru do 6,4 t/m (64 kN/m)

Koloseci I i II su na industrijskom koloseku vezani samo sa jedne strane tako da se na drugom kraju završavaju grudobranima,.

Manevru od stanice Surcin do Industrijski kolosek "NELT Co", za sada obavlja železnički operater "Srbija Cargo" ad.

Posedujemo 1 reach stacker kojim vršimo manipulacije kontejnera sa voza koji pristigne na Industrijski kolosek "NELT Co",

Cena za manipulacije punih kontejnera naplacuju se EUR 25 a praznih kontejnera EUR 20, obracunata u dinarskoj protivvrednosti





Nelt Co d.a.a. Maršala Tita 206 P. fah 530 11272 Dobanovci Srbija

t+381 11 3779 100 f+381 11 3779 140 office@nelt.com www.nelt.com www.neltlsp.rs PIB 100037645 MB 17304712

Radno vreme Nelt terminala je radnim danima od 08h – 21h, subotom od 08h-16h, nedelja je neradni dan. Praznicima ne radimo

Nelt terminala Ul. Maršala Tita 206, 11272, Dobanovci +381 60 8318595 +381 11 3779 33 www.nelt.com

S poštovanjem,

Interpredatni termina Nelt

ŀ

Appendix 3.11. Railway infrastructure development projects

The National Assembly, upon the proposal of the Government, passes the National Program for the railway infrastructure, which contains:

- 1. the existing characteristics and condition of the railway infrastructure of the Republic of Serbia;
- 2. strategy for construction, reconstruction and maintenance of the railway infrastructure;
- 3. development components in the construction of the new infrastructure capacities of special significance for the Republic of Serbia;
- 4. defining of the structure, time schedule for realization of priorities, level and sources of the financial assets needed for completion of the National Program activities.

National Program is passed for a five-year period.

Based on the National Program, the Infrastructure Manager prepares the annual program for construction, reconstruction and maintenance of the railway infrastructure, organization and regulation of the railway traffic.

No	Project	Estmated commencement of works (date or quarter)	Duration of works	Works' execution method
1	Modernization (construction and reconstruction) of railway line Belgrade –Subotica –state border (Kelebia) section Novi Sad - Subotica	December 2021	Q1 2025	As of April 7, 2022 complete traffic interruption is valid between the service points Novi Sad (excl.)- Subotica (excl.)
2	Civil engineering reconstruction of Niš – Dimitrovgrad railway line, section Sićevo - Dimitrovgrad	November 11 th , 2023	April 2026	Execution of the works and traffic performance according to the schedule: 36/36/36/60. Total line closure in the duration of 91 days starting from April 1, 2023 until July 1, 2025.
3	Electrification of Niš – Dimitrovgrad railway line, section Sićevo - Dimitrovgrad	March 2024	April 2026	Execution of the works and traffic performance will be realized alternately in intervals agreed with the Contractor.
4	Construction of northern bypass around city of Niš: 1. Crveni Krst – Pantelej – Matejevac 2. Trupale – Crveni Krst 3. Trupale – Niš Marshalling Yard	Q4 2023	Q3 2025	Execution of the works and traffic performance will be realized alternately in intervals agreed with the Contractor.



Appendix 4.1. Request for train path allocation (form)

Application form for train path allocation

	ertaking - oper	rator:						
Address:								
Contact perso	on:							
Tel.		Fax.			e-ma	il:		
Place and dat	te:							
1. BASIC	INFORMATION	ON ON THE RE						
T		Train No in	Desired tin	ne I	Route	1		
Train type		the previous timetable	departure	arrival	from	to	via	
		timetable						
NOTES								
NOTES								
A		D. II. O. D. A. III. O.	· -					
2. TRAIN	TIMETABLE	INFORMATIO	N	1				
C4 :		Staying time	in service	D	1 1			
Stops in se	rvice points	points [min]		Kunning	calendar			
3. TRAIN	INFORMATI	ON						
	Additional				Brakin	g		
Type of								
traction,	units, serial	G : 1N		m ·			3.6	
serial No of	No of traction		Train	Train		Danasatasa	Maximum	
traction	unit,	of the wagon /motor unit	mass [t]	length [m]	Type	Percentage [%]	train speed [km/h]	
unit,	function in	/inotor unit	լեյ	[111]		[70]		
route	the train,							
	route							
					1			
4 OTHER	DECLUDEM	ENITO						
4. OTHER	REQUIREM	ENIS						
						L.S. SI	GNATURE	



Appendix 4.1a. Request for train path allocation (e-papir)

Republic of Serbia

JSC "Infrastructure of Serbian Railways"

Rail Infrastructure Access Department

www.infrazs.rs

Business name / title

REQUEST

FOR TRAIN PATH ALLOCATION

Basic information about the applicant

Head office																	
Contact phone																	
Name and surname of the representative	ne																
Identification number									PIB								
Email address																	
	Bas	ic da	ta o	n th	e re	qui	red	tra	in path								
	Numbe			D	esir	ed t	im	е				Ro	ute				
Train type	train previous		d	lepar	ture	í	arri	val	from		to)		via			
]	Not	e											
			Γrai	n tiı	neta	able	da	ıta									
			g time in service pints [min]				Running calendar										
				Tra	iin o	lata											
									· · · · · · · · · · · · · · · · · · ·								



	Additional				Ŀ	Braking		
Type of traction, serial No of traction unit, route	traction units, serial No of traction unit, function in the train, route	Series and No of the wagon /motor unit	Train mass [t]	Train length [m]	Туре	Percentage [%]	Maximum train speed [km/h]	
			Special	note				
		not submit the st for initiating the					ing of the body	
The request	The request can also be submitted on sektor.pzi@srbrail.rs							



In $\underline{\hspace{1cm}}$, on

Applicant's signature

INFORMATION FOR THE APPLICANT

Deadline for resolving the submitted request	30 days before the start of the timetable
--	---



Network Statement 2024

Appendix 4.2. Instruction for completion of the Request for train path allocation

	T	
		Specify train category: Passenger train (EuroCity, InterCity, express, fast, semi-fast, passenger, cross-border, suburban, train of accompanied
	Train type	motorcars, travel agent's train, empty train); Freight train (single type of load train, single wagon load train, intermodal train, express, fast, direct, sectional, block train, pick-up goods train, circuit-working train, industrial, military,
1.		train with empty wagons, locomotive, test)
	Train No in the previous timetable	Specify the number of the train from the previous timetable, whose path elements match applicant's request (e.g. 541, 40760,)
	Desired time	Specify the desired time of the train departure from the origin station or the time of arrival to the destination station
	Route	Specify the origin and destination station of the train route and characteristic service point between those two stations which define the train route
	Stops in service points	Specify all service points where the train needs to stop
2.	Staying time in service points	Specify the needed staying time in each service point, in minutes
2.	Running calendar	Specify the days of the train running. For the trains whose running calendar covers several days, indicate the calendar on the entire route. In case a train path for an optional train is requested, indicate "Optional".
	Type of traction, serial No of traction unit, route	Specify traction type (electric or diesel), serial number of traction (operating) locomotive if there is change of traction on the required route
	Additional traction units, serial No of traction unit, function in the train, route	Specify number of additional traction units, traction units type (electric or diesel), serial number, position on the train (engine, double heading, banking,) additional traction unit running route
3.	Series and No of the wagon/motor unit	Specify wagon series (letter designation of wagon series) and number of wagons of the train i.e. series, number and serial number of multiple-unit sets (DMU/EMU)
	Train mass	Specify weight of all vehicles on the train including weight of operating locomotives
	Train length	Specify train length in metres without the length of operating locomotives



		Braking type: specify braking type (G, P, R, Mg,)				
	Braking	Braking percentage: specify braking percentage which has to be considered during timetabling				
	Maximum train speed	Specify maximum train speed considering characteristics of vehicles on the train				
4.	Other requirements	Specify other requirements of the train such as: shunting of vehicles, change of train composition, connection, staff shift, type of intermodal transport unit, dangerous goods type, special consignments, hand-over procedures on border crossings, trains hand-over on mutual confidence, technical stops (inspection, water supply, waste handling and similar) and time period required, need for additional track capacities (side tracking, pre-heating/cooling, forming of trains and similar), need for access to other additional service facilities and similar.				

Note: Upon receipt of the request for path allocation, $I\check{Z}S$ will provide the RU with the data based on which the RU will calculate the train running times and submit them to $I\check{Z}S$.



Appendix 4.3. Deadlines for annual 2023/2024 timetable preparation

Phase	Authority	Deadline
Submission of requests for path allocation for international passenger trains	RU	10.02.2023
Regular deadline for submitting allocation requests for annual timetable	IM	12.12.2022-11.04.2023
Coordination and harmonization of requests	IM/RU	12.04.2023-03.07.2023
Presentation of the First Draft timetable to RU	IM	03.07.2023
Draft review – remarks, suggestions, proposals and opinions	IM/RU	04.07.2023-04.08.2023
Draft timetable 2023/2024	IM	31.08.2023
Solving of problems and questions	IM	01.09.202308.09.2023
Extraordinary requests (remaining capacities)	RU	02.10.2023
Final deadline for capacity allocation according to extraordinary requests (remaining capacities)	IM	23.10.2023
Timetable coming into effect	IM	10.12.2023



Appendix 4.4. Deadlines for amendments to annual 2023/2024 Timetable

Amendment No	Submission date of requests for amendments to annual timetable	Deadline for capacity allocation	Application date for amendments to annual timetable
I	10.12.2023.	15.01.2024.	05.02.2024.
II	05.02.2024.	18.03.2024.	15.04.2024.
III	15.04.2024.	17.05.2024.	09.06.2024.
IV	08.07.2024.	12.08.2024.	02.09.2024.
V	05.08.2024.	16.09.2024.	07.10.2024.



Appendix 5.1. Overview of railway lines on which train running is possible when they are manned only with engine driver

Train running with engine driver only in a traction unit, without train crew (engine driver – without train crew), can be performed on the following lines:

- Belgrade Center-Stara Pazova Šid state border (Tovarnik);
- (Belgrade Center) Stara Pazova -Novi Sad Subotica state border (Kelebia);
- Belgrade Center Junction G Mladenovac-Lapovo-Niš-Preševo state border (Tabanovci);
- (Belgrade Center) Rakovica Jajinci Mala Krsna Velika Plana;
- Belgrade Center Pančevo Varoš (Vršac);
- Belgrade Center Resnik Požega Vrbnica state border (Bijelo Polje)
 - Section Resnik-Požega-Užice;
- Inđija Golubinci;
- Novi Sad Novi Sad Marshalling Yard Open line junction Sajlovo;
- Belgrade Center Novi Beograd;
- Belgrade Center Open line junction G (Rakovica);
- Belgrade Marshalling Yard "A" Ostružnica Batajnica;
- Belgrade Marshalling Yard "B"- Ostružnica;
- Belgrade Marshalling Yard "A"-Open line junction "B"-Open line junction "K/K1"- Resnik;
- Ostružnica Open line junction "B" (Open line junction"K/K1");
- Belgrade Marshalling Yard "B" Open line junction "R"-Open line junction "A"-(Resnik);
- (Belgrade Marshalling Yard "B") Open line junction "R" –Rakovica;
- Belgrade Marshalling Yard "A" Open line junction "T" Rakovica;
- Belgrade Marshalling Yard "B" Open line junction "T" (Rakovica);
- Connecting line in the area of Open line junction "K/K1": (Open line junction "B") switch "K" switch "K1" (Jajinci);
- Topčider Putnička (km 4+195) Open line junction G (Rakovica)⁴;
- (Open line junction Pančevački most) Open line junction Karađorđev park Open line junction Dedinje – (Open line junction G);
- By-pass line of Mala Krsna station: (Kolari) junction points 1 junction points 28 (Osipaonica);
- Open line junction Lapovo Varoš Lapovo Marshalling Yard Lapovo;
- Trupale Niš Marshalling Yard Međurovo;
- Crveni krst Niš Marshalling Yard;
- Niš Open line junction Most (Niš Marshalling Yard);
- Mala Krsna Požarevac (Bor);
- Pančevo Varoš Pančevo Vojlovica;
- Smederevo Open line junction Jezava Radinac Mala Krsna;
- Novi Sad Marshalling yard Open line junction Sajlovo.
- Subotica Horgos State Border (Röszke).

On the other lines, in particular cases, train running can be performed with engine driver – without train crew in compliance with terms stipulated in the Traffic Rulebook ("Official Gazette of the Republic of Serbia", No 34/22 and 107/22).

⁴ By virtue of the Conclusion of the Government of the Republic of Serbia No 340-2989/2022 dated April 7, 2022, the Decision of the Shareholders' Meeting of Joint Stock Company for Public Railway Infrastructure Management "Infrastructure of Serbian Railways" Belgrade concerning the termination of public railway traffic, dismounting and reconstruction of infrastructure capacities on railway line Topčider Putnička (km 4+ 195) – Open line junction "G" – (Rakovica), has been approved.




Appendix 5.2. Overview of the lines fulfilling the conditions for train running with an engine driver only

List of Infrastructure of Serbian Railways lines that do not meet the conditions for operation of traction units with an engine driver only (other lines meet the conditions):

- (Belgrade Center) Resnik Požega- Vrbnica- state border (Bijelo Polje)
 - Užice Vrbnica section.



Appendix 5.3. Geometry of pantograph (current collector) TIP POS - 254/III used on IŽS network

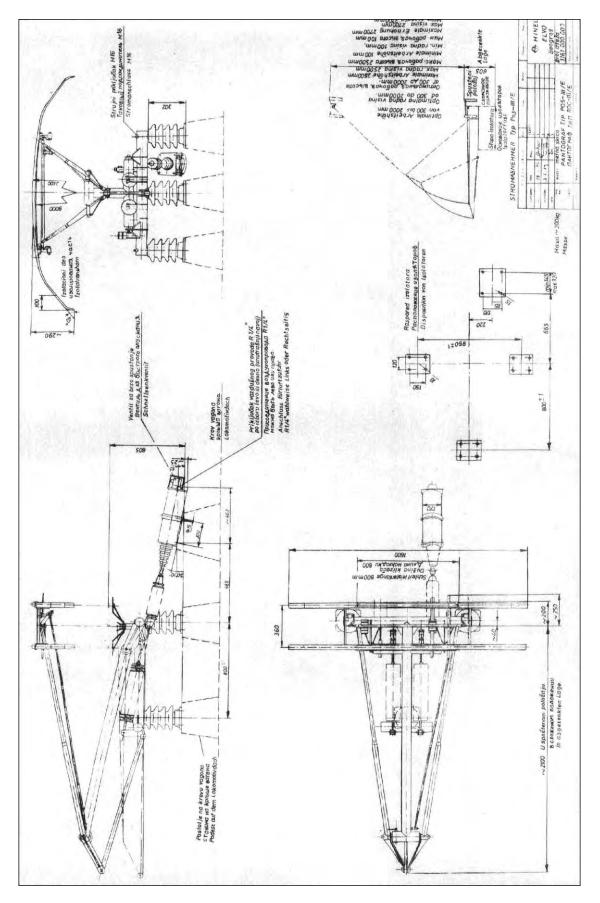



Appendix 6. Register of infrastructure data

	Altifude	30		97.6	177	92	10	0./0	84.3		79,11	84,96		79.11	84.96	101,57	96,94	102,06	01.7	84,77	81,77	84,66	87.29	83,79	86,71	96,2	64,93		Ì	ľ								Ĭ	Í	225 5	
	Loading gauge	63	0	* × ×	ŽS-I	ŽS-I	ŽS-I	Į-SŽ	Žs-I	Ž8-I	ŽS-I	ŽS-I		ŽS-I	ŽS-I	S-I	-	75.1	76.1	ŽS-I	ŽS-I	ŽS-I	1-SZ	ŽS-I	Ţ.S.Ţ	S-I	1-07		ł	ŽS-I	ŽS-I	ŽS-I	ŽS-I	1-S7	7.87	ZS-I	ŽS-I	ŢS-I	Į-SZ	78.1	ŽS-I
the line [daV]	←	28		×8	200	1 Ž	-	n X	2 Ž	Ž	1 Ž	, N	1	8/1 Ž	1 Ž	-	2 × 2	+	3 6		Ž	3 %	77	Ž	Ž	+	4		ł	.N	7 2	- Ž	N N	7 %	7 1	Z A	Ž	Ž.	· N	- 1	
Ruling resistance of	\rightarrow	27 2			1	4	T		á		1	ю		10/1	3	6	-	+	0 0	+		-	7	H	Ħ	4 .	-		Ì		10	9		Ť	7	. 00		10	10	15	-
रेता की हा ह	Slope	26		0	2	1		0	2		e	0		0/1	0	9	7	v	9 6	2 2	4	ij	2			3	4				۵	0				0		0	-	0 2	-
gniluA	Indine			0.0		2.0 4		0 0	0 6		3 1	1 3	2.5	0.3 9/0	4.1 3	8 0,0	0,0	0,0	0,0		0,0	0,0	0.0	0,0	0,0	0,0	-		4	0,0	80	1,5 5		4	7.9 6			6 0'6		7.0 12	3
[0%] 110	Gradient of the static	24	6	0.0					0.9		0.3	0 4.1	7											L					-		0			4					-	-	
sn	Minimum curve radi	23		905	5	269	701	00/	2500		7000	5000		700	4993	2500	3000	3000	10000	10000	1300	10000	10000	1500		15000	mact			300	700	30(400	300		300	300	300	400
freighF Franspo	Open for passenger /	22		<u>а</u>	, д	$P/F^{1)}$	Д	4 4	Д		P/F	P/F	124	P/F	P/F	P/F	Д 6	д Д/д	1/1	P/F		д	P/F			PÆ			\$	4		Ъ	Ъ	F	P/F		Ъ	P/F	ы	P/F	Б
e point	Occupancy of servic	21	П	d L	9	P	ļ		д	Ī	Þ	д	Р	U	Р	Ь	Þ	٩	1	ь		U	D			Ы			-	4		Ъ		Į,	Д	n		D	Þ) A	ņ
miolis	Side-/end-loading pl	9 20	-	+		Ω	4	-	ØΣ		ďΩ	S	4	ď	VΩ		202	D.	2	ξŽ		4	4	H	Ц	Yes S/E	4			+	L		-	+	C.	2		Ω	4	V.	1
	Freight car scales	19		2.5	2 6	2	,		4		1	9	4	-	3.	9	9 1	7 0	0 00	6	0		7 8	4	5	-			novce)	7	H	3	2	-		-	8	7	8	4 6	9
DIO	Service point code -	18	Ш	16052	16012	16002	1000	TOOOT	16204		16501	16503	16204	16501	16503	16505	16506	16507	16508	16509	16510	16511	16513	16514	16515	16516	/1001		(Tabar	70001		16103	16102	16101	15501	15401	15408	15402	15403	15404	15406
he service poin	Manner of securing t	17		11	1	11	:		11		11	11	=	11	11	ī	=	ŀ	-	1		Ŧ	-			4			rder	-	-	1	ŀ	7	ŀ	-		1	- ,	-	E
noüslış	Manner of traffic reg	16	ik)	D C with TW.T	RC with TWT	RC with TWT	RC with TWT	RC with TWT	RC with TWT	RC with TWT	RC with TWT	RC with TWT		RC with TWT	RC with TWT	RC with AB	RC with AB	RC with AB	DC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	station distance		"G" - Rakovica - Mladenovac - Lapovo - Niš - Preševo - state border - (Tabanovce)	RC with TWT	RC with TWT	RC with TWT	RC with TWT	RC with TWI	RC with TWT	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB
	acceptance of the longest trains	53	(Tovarr	5 and 6		8 and 9		7 nue	5 and 6		T	4 and 5	9 and 10		5 and 6	and 5	4 and 5	A page 4	4 and 5	2 and 3		2 and 3	4 and 5			4 and 5			70 - Niš	o pure c	Ħ	5	T	i		and 2		4	3	1 6	2 2
Direction B→A	Tracks for		der -			-		+			_	1.1	-		M	4		1			Н				\vdash	_			Lapov	_	Н		+	+	1 5	-				4	\perp
	Maximum permitted	14	ate bor	506	370	411	000	507	238			651	770		443	749	786	6.59	377	672		299	673			707			- DBAC	200		702			730	707	L	781	710	659	189
a←A	acceptance of the longest trains	13 INFS	- Stara Pazova - Šid - state border - (Tovarnik)	5 and 6	aut 5	1 and 2	A Property	5 and 4	1 and 2		1a and 4	1 and 3	9 and 10	2 and 3	1 and 2	2 and 3	2 and 3	2 and 3	2 and 3	4 and 5		4 and 5	and 3			2 and 3			Mladene	o and o		4			67	1 and 2		4	ю,	1 6	7 7
Direction	rain length Tracks for	12 13 MAIN LINES	- BAOZI	506 5	-	550 1		661	227		122 1	641	757 9	411 2		9.1	2 269	710				614 4	552 2	+	\vdash	665 2			vica -	2000	i	702	1	1	30	709		111	753	629	189
pəəds	Maximum permitted	-	stara Pa	100	1	40	55	1	7		200 F	_	124		E	٥	٥	c	- [5		4,			٥	(mixed, Šid)		- Rako	20		80 7	-	70	10	1	H			0 0	
Maximum permitted	Right track	10	rade - S	1001	H		120			+	oc P oc	7	120 F 120		160 F 160	08		120	T	20	Ī	-	30			1	au ffic (mixe		D. NOI	50 5	=	8 08		70 7		30		1	30		30
	Railway line categor	H	101. Belgrade	1	74	D4	-	- - -	D4	D4	- 7	D4	- 1	D4	D4 16	+	-	D3	2 0	1	D3	D3	D3		D3	+	tances for freight traffic			D4		D4	D4	-	1 2	74	D4	D4	7 A	D4 D4	D4
	Class of railway line	8	101	L M	+	7.7		M		M	M	M		M	M	-	- 1	N N	1 6		M	_	Z Z				for free		E 10	Z		M	\pm	M	_	+	\vdash			Z Z	+
	Single/double-track	7		F	-	D		a a	Д	А	D	Д		D	D	+	-	9 6			D		a A	+	D	+	tances		N LINE JUNC	9	Н	D		+	9 6	+		S	+	20 00	+
	Type of service poin	9			3	1	ε .	3 60	-	6	-	н	-	-	1	1	- ,	5 -	4 -	-	3		0 -	3	3	- 5	tion dis		OPE	- 9	9	1	3	9 6	n -	64	3	1	7	7 -	1-
	Chainage Name of service point	4.		0+000 BEOGRAD CENTAR	5+216	3.316 8+532 ZEMUN	11+053	155 127446 ZEMON FOLDE 551 13+799 KAMENDIN	5.232 19+031 BATAINICA F	2.975 22+006 KM 22+006 SC	515 27+106 NOVA PAZOVA F	7.838 34+944 STARA PAZOVA P	20+616 BATAINICAF	556 27+106 NOVA PAZOVA F	7.838 34+944 STARA PAZOVA F	44+361	53+713	6.087 59+800 KRALJEVCI	73+410	81+721	4.379 86±100 LAĆARAK	94+076			3.600 112+700 GIBARAC		5.202] 121+330 S1ALE BOKDEK data for service points and station distances for passenger traffic (Now Sad), ^T data for service points and station di	for the purposes of arrival and departure for the TPS Zemun	102 Beograd Centar - OPE	1.337 1.4337 OPEN LINE HUNCTION DEDINJE	4+416	8+533	10+700	11 +720	2.330 14-4050 RFSNTK	17+930	20+121		24+760	4.832 29+592 RIPANJ TUNEL 5.138 34+730 R 4TiA	41+508
	Distance in km	3					*2,625	1.551	5.2	2.5	*3,515	7.8		*6,556	7.8	-	*8,708	5.055	2.0	8.3	4.3	7.5	5.8	4.082	3.6	3.665	re points :	ses of an		1993	3.6	*1,738	2.1	0.0	2.3	3.871	2.191	1.1	3.4	4.5	6.7
public transport	гец цяск	7		⊅86 3 00		161		£8	81.2	1.12	0					13.051999.	,εε	881.	71	10		14	1681	.01	70		cservic	e purpo.		n 67	ľ	.18	81.6	90.E	0			.60	84.		
psugoner to	Right track	4	П	1984 190'E			.8	761	01.1	0						2009.		1.10 192			-	876	1.11	SI			data for	for the	ſ	0 F7	F	34.	61.6	50.7	1			03.09.	1884.		



	sbutitlA	30			Ĭ									0 001	103.9	107.0	105.4			107.4			115.3		2000	1.021		134.6	2.00	136.4	141.1	144,0		148.5				164		173.4	1.67.7				184.9			
	Surg gaibso	29	ZS-I	ZS-I	ŽS-I	ŽS-I	ŢS-I	ŽS-I	žs-ī	ŽS-I	ŢS-I	ZS-I	I-SZ	1-87	1-67	1.07	78.1	78-1	ŽS-I	ŽS-I	ŽS-I	ŽS-I	ŽS-I	ZS-I	I-S	78.1	Ţ.S.Ţ	ŽS-I	ŢS-I	I-SZ	1.87	70.1	1.8.	ŽS-I	ŽS-I	ŽS-I	ŽS-I	ŽS-I	ŽS-I	I-SZ	ŽS-I	ŽS-I	ZS-I	ŽS-I	ŽS-I	ŽS-I	I-SZ	ZS-I
the line [daV]	←	28	-	9	5		4		4	1	+	2		+	0 4	+	v	-		3	-	- 7	3		+	2	F	4	-	3		4	+	3	+		-	2		4	'n	-			1			1
Ruling resistance of	\rightarrow	27 2	1	3	1		3	F	1	4	7	6	1	+	0 =	+	4	+	Ť	4	T	H	4	+	+	0	t	4	+	+	+	4	4	-	+		-	-		7	3	r	9	Ť	9		1	1
tra di ent	Slope	26	4	'n	'n		ų	Ĭ	4	1	7	S	5	,	0 4	9	V	,		3			3		,	0		4		0	n c	1	2	63		Ī		2		4	m			I	9			
RulinA	enibni	25	-	2	1		3		-	3		æ		_	0 4	_	4	_		7			7		_	2		4		ε,	100	0		3				S		9					9			
[096] tro	Gradient of the statio	24	3,5	2,3	0,3		1,3		1,1	6,5	7,0			1	2.0	0,0	0.0			0.0			1,5		c	0,0		4,4		0,0	0,0	4,0	1.0	1.0				0,0		5,0	0.0			1	0,0		I	
sn	Minimum curve radi	23	800	500	520		200		800	500	950	700	945	1000	700	007	500	1000	006	800	800	800	800	480	400	1000	2000	1150	1000	1000	300	350	350	909	500	500	500	2000	700	1000	700	1000	10000	1200	1200	700	700	1500
freighF Fransp	Open for passenger/	22	Ь	P/F	Ь	Д	P/F	Ъ	Ъ	P/F	Ы	PÆ	,	4 6	P/F	4 0	η Δ	۵,	Д	P/F	Ы	Ъ	P/F	щ	4	D d	, a	P/F	ď	P/F	F	<u>م</u> بد	Д	P/F	а	a,	Ы	P/F	Ъ	P/F	P/F	Ь	Ь	Ъ	P/F	ы	A, i	ы
e point	Occupancy of service	21	n	Ь	П		Þ		D	Ь	D	Д		+	24 F	4	ā	+		д			Ь	1	F	4	Ħ	Þ		д,) F	0	Þ	Þ		Ħ		Þ	T	Þ	Д	T		F	Ъ		Ť	
атоты	side-/end-loading pl	20		ζ2		J	S	ľ		S		S		Ç	2		Î						S		Ç	2		S		S				S				S		S	S		ï		S			
	Freight car scales	19			1			I						1	1										Ţ							I										L						
DIU	Service point code -	18	15407	15460	13701	13702	13703	13704	13705	13706	13707	13401	13402	13403	13404	13406	13450	13301	13302	13303	13304	13305	13350	13307	12010	13311	13312	13313	13314	13352	10521	12517	12503	12504	12505	12506	12519	12507	12508	12509	12510	12520	12511	12512	12513	12514	12515	12518
he service poi	Manner of securing t	17	1	1	1		Ţ		1	1	-	-		١,		4	-			H			H	ŀ	-	-		1		٠,	7	4	-	-				T		1	H			Ē	1			
noitslu	Маплет оf traffic reg	16	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	AB	AB	AB	AP AP	AB	AB	AB	AB	AB	AB	AB	AB	AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	BC with AB	RC with AB	RC with AB	RC with TWT	RC with TWT	RC with TWT	RC with TWT	RC with TWT	RC with TWT	RC with TWT	RC with TWT	RC with TWT	RC with TWT	RC with TWT	RC with TWT	RC with TWT	RC with TWT
A⇔A	ongest trains		4	3	3		7	Ī	3	3	3	4	i		n	Ť	4 and 5		İ	4 and 5			4 and 5	Ì		o allu	Ī	4 and 5		2	٠,	4	-	2 and 3		İ		2 and 3	l	3 and 4	2 and 3	ľ		7	3 and 4		Ì	1
Direction	rain length Tracks for		959	649	838		969	i,	197	642	42	998	1	*	710	t	657	1	t	626 4	\vdash		715 4	+	_	6/0	t	620 4	9	825	66/	7.	17	590 2	+	t	T	508 2	1		498 2	1	-		665 3		t	1
	ongest trains Maximum permitted		6.	9	8		9		7	9	7.	Š		-	Ö	+	+	٠						+	+	+	÷	Н	\rightarrow	+	+	+	+	-	\vdash	-	-	H	⊢	7		+	1				+	
Direction A←A	seceptance of the Tracks for	Ц	4	3	3		7		3	3	3	3		1	4		2 and 3			2 and 3			2 and 3		-	o anno		2 and 3		3 and 4	7 6	5 and 4	2	4 and 5		L	L	4 and 5		1 and	4 and 5		1		2 and 3			
	Maximum permitted Tain length		199	651	838		693		862	647	746	785			cco		530			710			788		400	707		615		559	66/	040	219	999				574		753	543			Į.	571			
sbeed speed	Ceff track	11		100		20		Ī		100			C	ne .		100	3		50			70			120		100	-	30	4	30		70									001 (Ī					
mumixsM	Right track	10									-			1	70				_	- 6	2				170	L	30	_	100	+	1	1						_				100				-	_	
λ	Railway line categor	6	D4	D4	D4	7	D4	D4	D4	D4	D4	D4	7 G	4 5	7 2	Š	2	24	D4	D4	D4	D4	D4	4	D4 2	2 5	D4	D4	D4	D4	5 5	2 5	D4	D4	D4	D4	D4	D4	D4	D4	D4	D4	D4	D4	D4	D4	D4	D4
R	Class of railway line	88	M	M	M	×	M	M	M	M	×	×	Z,	Z ;	N N	N N	×	Z	Z	M	M	M	M	Z,	Z :	2	Z	M	W	Z ;	Z ?	N N	Σ	M	M	M	M	M	M	M	M	M	M	M	M	M	M	M
jue	Single/double-track l	7	S	ď	S	S	ď	S	S	ŝ	Ω	S	ДΙ	9 6	9 6	9 6	4 6	6	Ω	Д	А	D	А	Α	9 6	9 6	Α	Ω	Q	a i	2 0	2 0	o,	S	a	Q	Ω	Q	Q	Д	Р	Ω	Д	А	D	А	A I	D
1	Type of service poin	. 9	1	1	1	9	1	n	2	1	-	=	e .	n -	- t	- 6	s +		n	Ŧ	3	3	E	α	9 ,	4 55	n	1	3	1	74 +	4 6	2 2	T	3	65	3	-	n	1	-	3	6	8	I	£,	3	3
	oint																																															
	Chainage Name of service point		47+748	53+110 MLADENOVAC	950+09	62+925		70+320 RATARE	74+000	78+564 PALANKA	85+570	90+434	94+000	67/4/6	100+312 I ADOXO MADOŠ	100+311	100+6001	114+100	116+975	120+300	126+950	131+395 BUKOVČE	135+237 JAGODINA	140+700	145+981	153-1645 FARVACEN 163-1670 SIKTRICA/R ATART	166+600	171+600	173+600	176+310	181+900	100+400 CFP OVO/P AŽANI	192+216	194+939	199+193	201+400	203+500	205+617	208+000	210+480	214+197	217+468	218+785 LUŽANE	222+070	222+705		229+309	232+590 VRTISTE
		4		53+110	950+09	62+925	4.625 67+550 KUSADAK	70+320	74+000		85+570	90+434	94+000	67/4/6	-	100+311	100+600	114+100	116+975	120+300	126+950		135+237	140+700	145+981		166+600	171+600	173+600	176+310	181+900		192+216	194+939	199+193	201+400	203+500	205+617	208+000	-	214+197	217+468	1.7	5 222+070	222+705		229+309	
transport public	Chainage	3 4	47+748	53+110	950+09	2.869 62+925	67+550	2.770 70+320	74+000	78+564	85+570	90+434	94+000	67/4/6	100+302	1 689 108-1001	1 500 100+600	4 500 114+100	116+975	3.325 120+300	126+950	131+395	135+237	140+700	145+981	*8 587 163+670	166+600	5.000 171+600	173+600	2.710 176+310	3.590 181+900	100+400	1.816 192+216	194+939	199+193	2,207 201+400	203+500	2.117 205+617	2.383 208+000	2,480 210+480	214+197	217+468	7 218+785	3.285 222+070	0.635 222+705	227+950	1.359 229+309	232+590



	Altitude	30	188.8		183.3	183	194.1		194			201.0	2115	7717		217.9	220.0	248.2	255		282.6	297.2	306.9	324.4	333.3			346.7	367.5	2110	383.0	397.7		427.2	459.2				129.9	1.48.8	130.0	124.6	13.4		178.6	157.0
	Loading gauge	56	I-SZ	Zs-1	ZS-I	1-87	1.07	1.02	ŽS-I	ŽS-I	ŽS-I	1-67	70.1	78.1	1-S2	ŽS-I	ŽS-I	I-SZ	ŽS-I	ŽS-I	I-SZ	I-SZ	1.52	Ž4-1	ZS-1	ZS-I	ŽS-I	ZS-I	ZS-I	ŽS-I	ZS-I	ŽS-I	Ţ-SZ	ZS-I	Ţs-ī	I-SZ	I	Year	- S-1 - S2-1	78.1	ŽS-I	ŽS-I	ŽS-I	ŽS-I	ZS-I	1.8%
the line [daN]	←	28		-	9	7			2	Н		1	-	1		0		1	2		1	1	ı		2		-	+	0 0	+	3	-		1		15	ŀ	T	. 6	+	1	10	1		-	0
Ruling resistance of	\rightarrow	27	w)		, ,	n r	7		4		,	7	u	n	Ī	2	4	5	9		-	9 0	×	1				7	r 4		'n	3		80	13	2	ľ	12	13 12	: =	1		œ		=	5
gradient	Slope	26	2	7	4	0	9 +		7	ō	ō	٠,	-	4 0	0	0	0	1	-	1	ń	- 0	o 4	r	1	0	0	2	ω 4	4	3	0	2	1	\rightarrow	13		c	2 0	+	7	6	0		0	0
Ruling	indine	25	-		0 .	4 6	7 -	4 6	4	\mathbf{H}	7	7 5	_	0.0	61	1 2	-	8	9 1		-	1 0	1	×		S	9	7	0 0		4	_	8	8 0	1 14	-	_	100	12	_		0	\perp	_		3 5
[0%] uc	Gradient of the static	24	5,48	-	7	_	120		0,71			160	-	7,44	L	1.71	_	2,	4,31	ш		4,1	3,7	575				-	4,49		7,	2,09		11,0	1,1		Ľ	4,7	7.9		E		0,0		_	L
sn	Minimum curve radi	23	950	550	295	300	8 0003	2000	700	٥	4000	1000	1000	1600	0	0	2000	2500	327	300	290	300	300	300	300	950	400	1000	400	400	350	350	450	009	400	300		250	300	208	1	300	300		275	350
TransT Tdg isr1	Open for passenger	22	P/F		P/F	P/F	4 6	4 0	P/F	Ь	Ы	F/F	4 6	4 0	4	Ъ	P/F	Ъ	P/F	Ъ	P/F	д	Δį	D/F	Ь	Ь	Ъ	Д	P/F	Ъ	P/F	P/F	Ъ		P/F		f	4	P.	P	4	Ь	Ь	Ь	Ь	u
e point	Occupancy of servic	21	д	_	4	4 E	2		Б	-	:	0	ŧ	0		n	Ы	D	D	\rightarrow	-	p	o l	-	b			Þ	Þ	-	d	d		D	Ъ	Ā	4	4 =) A	F	2	n	L		Þ	4
ацош	Side-\end-loading pl	+	Ø	3	S/E	0	2	1	Ø			2	ō	2	L		Ø		Ø		S/E	1	1	v	2				٥	2	S	ß			S	4	4		4	Ļ	ļ.	L		Ц	4	-
	Freight car scales	19		Н		7 4					<u>.</u>	+			-	-					_	1			+			_			-	Ł				_	Ł	-	+		1	H				
nıc	Service point code -	18	12550		12551	12301	70551	12303	11001	11002	11003	11004	11006	11007	11009	11008	11050	11010	11011	11012	11013	11014	11015	11016	11017	11018	11030	11019	11020	11022	11023	11024	11025	11026	11027	11028	16100	10103	15602	15603	15615	15604	15605	15606	15607	
he service poi	Manner of securing t	17	1	1	-	1	7		1			-		1	L	I	1	1	1		7	1	-	-	1	1.1.		1	1	1	1	-		1	1		-	4	1	-	1	1	1		-	ŀ
noitslu	Manner of traffic reg	16	AB	AB with TWT	AB with TWT	P.Cith AD	PC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC WITH AB	RC WILLIAD	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	with	RC with AB	RC with AB	RC with AB	PC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	station distance	ı Plana	AD	AB AB	BC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	at II. Da
	acceptance of the ongest trains		3		3	1 -	-		3			2 and 3		4	ŀ	I	2	1	4		3	e c	79	,	1		7	7	2 2	C pum	3	1		1	6		- Rakovica - Jajinci - Mala Krsna - Velika Plana	0	4		,	and 2	3		2	
Direction B→A	rain length Fracks for	4	662		488	543	0	+	601	H	_	7 579	23	750	t	759	648	069	526	H	848	632	708	89	865			653	-	+	623	603		684	60		la Krsm	707	90	573	3	F	714		613	000
	ongest trains Maximum permitted		9	H	4 ,	n v	0		9	H		+	4	9	t	7	9	9	S	H	9	0 1	7	2	- 8			9	9 4		9	9		9	9	-	ci - Ma	1	+	1	,	8	7		9	ĺ
Direction A←B	Tracks for		3	ľ	3		1		4			5 and 5	,	7		-	4	1	4		3	2	7	r	L			7	7 (4	3	ī		1	3		a - Jajin	4	4	"	,	1	3		_	
	Maximum permitted Tain length		989		490	280	000		009		000	909	630	650		723	969	989	537		889	596	700	625	828			651	648	5	819	643		687	610		akovic	707	710	643	5	815	711		909	200
sbeeq becuntted	Left frack	11	20	09					50				30		50			100	65		20	ı	30			20		1	20	06		50	30	2	40			80	09				65			
mumizsM	Right track	10	"	30					•									ì															ľ			,	Beograd centar)	~	۱							
λ	Railway line categor	6	D4	D4	D4	D4	100	D4	D4	D4	D4	7	1 6	74	D4	D4	D4	D4	D4	D4	D4	Ď Č	D4	2 2	7	D4	D4	D4	D4	D4	D4	D4	D4	D4	D4	D4	Seogr	47	D4	2	D4	D4	D4	D4	D4	. 4
4	Class of railway line	89	M	Z,	Σ,	N X	14	2 2	Z	M	Ø;	Z Z	1	4 >	Z	M	Z	M	M	M	Z	M	ΣZ	1	Z	M	M	Z	Z	×	M	M	M	M	M		103 (1	M	Σ	2	Z	M	M	M	Z	
hne	Single/double-track	7	ιΩ	D	Q.	00 0	2 0	2 0	ν v	ß	so a	2 0	2 0	2 0	S	S	S	02	ď	W	S	so c	v v	2 0	2 02	τΩ	S	52	02 0	2 02	S	S	ß	ß	S	S	TE.	טמ	2 02	2 0	2 02	w	ſΩ	S	ď	. 10
3	Type of service poin	9	1	17	-	1 ,	7 0	n (-	3	ε,	7 6	7 +	1 6	, 60	67	1	2	1	3	-	7 (7 17	7 -	-	3	3	7	H	3 6	-	-	3	2	1	13		4 4	0 -	÷	4 60	2	1	3	2	,
	Distance in km Chainage Name of service of s	4	6.066 241+005 CRVENI KRST	242+741	243+583	5.879 249+462 MEDUROVO	166-320	1.495 2554441 CALIJINAC 1.569 2574010 MALOŠIŠTE	261+451	263+261	265+854	2.088 20/+942 BRESIOVAC	775 1564	GP.	280+300	281+975	287+568	295+779	6.084 301+863 GRDELICA	308+610	312+725	1	3.215 322+886 MOMIN KAMEN 3.452 326+338 \$FITINCE	320+501	334+066	2.069 336+135 LEPENIČKI MOST	339+055	341+437	6.578 348+015 VRANJSKA BANJA	361+415	365+725	373+692	7.020 380+712 LETOVICA	386+550	392+309	8.143 400+452 STATE BORDER	A PATTOCA A TOTAL A	3 003 34708 OBENTINE HINCHTON V1	10+916	16+277	20+350	21+242	24+885	27+840		CONTRACTOR STATE A TAXABLE A CONTRACTOR OF THE STATE OF T
fransport	гец изск	2		1						Ш		1			L	Į.	H			Ц	_	1		ľ		7					L	L		ď			F		10	*		S			(I)	L
handover to public	- A	H	09.1884	·6	4																1888.																	201 01 00	W. 13							
Date of	Right track	-	03.09	3.0																																Ш	1	1 00	20.1	1						



Salway line category Salway line category Sight track Salman permitted Asximum permitted Asximum permitted Asximum permitted Asximum permitted Asximum permitted Asximum permitted Asximum permitted Asximum permitted Asximum permitted Asximum permitted Asximum permitted Asximum permitted Asximum permitted Asximum permitted Asximum permitted Asximum permitted Assimum permitted Asximum permit	9 10 11 12 13 14 15 16 17	D4 80 RC with AB	D4 624 3 619 3 RCwith AB 1	M D4 612 3 617 3 RCwith AB 1 15611	D4 RCwith AB	3 628 3 RC with AB 1	D4 602 2 586 2 RC with AB 1	M D4 AB 13509	D4 50 629 4 633 4	D4 30 RCwith AB 1	M D4 RCwith AB 13502	D4 545 2 845 2 RCwith AB 1	D4 RC with AB	M D4 100 608 3 610 3 RCwith AB 1 13504	D4 RC with AB	D4 581 3 476 3 RCwith AB 1	M D4 594 2 589 2 RCwith AB 1 13507 M D4 785 3 866 4 DC with AB 1 13401	.04 (Jagodina) - Open line junction Čuprija - Čuprija - Paračin	9 09	M D4 100 847 5 892 4 station distance 1 13310	ad Centar) - Stara Pazova - Novi Sad - Subotica - state border - (Kelebia)	641 1 and 2 443 5 and 6	1 and 2 RC with TWT 11	D4 RC with TWT 11	D4 160 160 247 3 and 4 247 1 and 2		D4 120 120 station distance	D4 100 station distance	492 4 and 5 493 4 and 5 statio	D3 772 2 and 3 785 2 and 3 AB 1	D3 80 AB 1	D3 816 3 and 4 812 3 and 4 AB 1	D3 60 943 3 and 4 938 3 and 4 AB 1	704 3 and 4 700 3 and 4	D3 663 1 and 2 656 1 and 2 AB 1 2	D3 792 2 and 3 793 2 and 3 AB 1	D3 40	D3 731 3 and 4 731 3 and 4 AB 1	M D3 777 2 md 3 780 2 md 3 48 1 23409
Thainage Ype of zervice point Thingle double-track line	4 5 6 7	39+600 BRESTOVI 3 S	MALI POŽAREVAC	43+10/ IDRAZAN/SEPSIN 3 S	52+315 ŽIVKOVAC 3 S	2.904 55+219 VODANj 2 S	60+609 KOLARI 1 S	5.961 66+570 RALJA SMEDEREVSKA 3 S 1 1 230 67+800 III MCTTON DORITTI MATA KD SNA 12 C	69+068 MALA KRSNA 1 S	70+264 JUNCTION POINT 28 MALA KRSNA 12 S	2.770 74-764 OSTPA ONICA 3 S	76+202 OSIPAONICA 1 S	77+817 LUGAVČINA 3 S	3.000 81+41/ SAKAUKU. 1.350 82+767 LOZOVIK/SARAORCI 1 S	87+717 MILOŠEVAC 3 S	90+226 KRNJEVO/TRNOVČE 1 S	*\$ 586 00-706 VELIKO ORASJE 1 S	S. T. O. O. O. O. O. O. O. O. O. O. O. O. O.	0+000 OPEN LINE JUNCTION ČUPRIJA 6	 S	105	CTAPA IIA30BA 1	54+032 BEŠKA 1 D	62+058 OPEN LINE JUNCTION KARLOVAČKI VINOGRA 6 D	65+812 SREMSKI KARLOVCI 1 D	0.658 70+870 PETROVARADIN 1 D	72+381 KM 72+381 SC 9 D	76+513 JUNCTION POINT 6 NOVI SAD 12 D	*0,210 78+039 NOVI SAD 1 S	91+381 KISAČ	98+056 STEPAMOVIČEVO	103+538 ZMAJEVO	116+745 VREAS 1 S	11.3/3 1284118 LOWCENAGC	1354163 MALITEOŠ POLIT 2 S	144+198 BAČKA TOPOLA	152+800 MALIBEOGRAD 3 S	157+818 ZBDNIK 1 S	2.138 102+970 VERUSIC 4.304 167+180 MATMONIČEVO



	sbutitlA §	1133	113.2	128			188.3			199		207.2		219.5	233.3		265		267	1	286.9		314			341.6	0,00	200.3		416.5			445.8									i i	77.1
	S Loading gauge	74.1	ŽS-I	ŽS-I		Ī	×	ZS-I	78.1	ŽS-I	ŽS-I	ŢS-I	ZS-I	ZS-I	ZS-1	78.1	ŽS-I	ŽS-1	ŽS-I	ŻS-I	ŽS-I	ZS-I	ZS-I	7.S-1	ŽS-I	Ż8-I	ZS-I	70.1	78-1	ŽS-I	ŽS-I	ZS-I	ŽS-I	ZS-I		70.1	Ž8-1	ŽS-I	ŽS-I	ŽS-I	ŽS-I	ZS-I	7S-1
resistance of the line [daM]	← 8	07	S	\vdash		İ			İ	4	+	1		4	,	Ì	ļ		, v		ď,	Ĭ		Ĺ		*			İ	1			9	10	Ī			10		8		.	2 (4
Ruling		17	9	6						9		4		S	o	l	۲		63		9		1			4	t			8			10	12	L	- 9		4		÷	Ц	1	
Ruling gradient		07	5	-		1	-	-	0	+	-	1	0	-	+	9 0	+	-	-				-	0 0		-	-	2 2	+		-	0		0 1	Į	-	+	000	₽	8	Н	+	1
	anibul 5	0	3.3	_	1	-		73	T V	2.2		2,5 4	9	_		יי פ	0.0		0,0	43	4,9 4		0,0	× m	S	6.4 \$	_	0,0	7 10	8.5	5	9	9,5 10	11	4	200	>	50	+	Ŧ	Н		0,0 7
[0%] uc	Gradient of the static	7		L	Ш	1	Ц				-		0	- 1	3,09								24,	0.0	-		- 1	_					-		0	L					Ц	ď	600 0.45
sn	Minimum curve radi	67	009	2000		ļ		300	500	2000	3000	1000	310	300	300	300	500	450	500	009	497	350	300	400	909	495		550	0	3000	700	200	500	300		1	900		500	800	Ц		4
reighF Franspo	Open for passenger /	77	PIF		Ш		P/F	F	4	P		Ъ	Д	d i	4	۵	۹ ۵	۵	4 04	Ь	Д	Д	ч	a, p.	Ъ	Ъ	t E	1/4	4 0	Д	Ы	Д	P/F		2	4 0	4 0	ь	д	Ь	Д	d 2	P/F
e point	Occupancy of servic	17	-				д		Ι	d		P		n i	4	I	ρ.		Ъ		Ъ		д			ď	f	4		Д			Ъ		٩	4	۵	Д		Ь	П	A F	4 0
motta	Iq gnibsol-baə\-əbi2	0 A		Ĺ			S/E			Ĺ	Ü.		Ц				L										Ţ	2		S	L	Ù	S/E	Ш	L						Ц		2 02
	Freight car scales	Ves	3			1			1						1	Ļ	1			1									ļ	E	L		Yes			1	ļ				Н		1 42
nıc	Service point code -	03780	23450	23499			12551	10101	12401	12402		12404	12405	12406	12407	12400	12410	12426	12411	12412	12413	12414	12415	12416	12427	12418	12419	12470	12422	12423	12424	12425	12499	12498	14050	16053	16054	16013	16016	16015	16006	16007	21001
the service poin	Manner of securing t	7 7	+ 4			ŀ	H	-		-		1		00	ø		00		∞	1	9		80	Q E	Y	8		0		9	L		9			1-	1	Н	1	1	Н		4 4
noitslu	ў Маплег оґ паййс те <u>в</u>	Montened distance	block post distance	station distance			19	AB	AB	AB	AB	AB	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	- Pancevo glavna stanica - Vršac - state border - (Stamora Moravita)	AB with TREET	AB with TWT	AB with TWT	AB	AB	AB	AB	station distance
B→A	Tracks for Tracks for	Sand 12	2 and 3			goman)	3	Ì	Ť	3		4		,	7		2 and 3		2 and 3		2		2 and 3			2 and 3		c mm 7		2 and 3			7		order - (St	1	Ì		l	2		7	2 and 3
Direction	Maximum permitted train length	14	47	Т		(Dra	488		t	009		009	i	1	524	i	603	1	614	-	791	_	713			624		170	İ	626	1		711		state be	400	t	Ť		269	П	\neg	471
	acceptance of the longest trains	11	+ 65	t		106 Niš - Dimitrovgrad - state border - (Dragoman)	5		İ	3	Ħ	4	i	t	7	Ī	2 and 3	+	2 and 3		2	-	2 and 3	i	-	2 and 3	+	C DIE 7	l	2 and 3	-		. 7		· Vršac -	o alla To	İ		i	3	Ħ	-	2 and 3
Direction A→B	train length	10,	7	Н		rad - sta	490	+	ł	009		599			574	ł	+	+	614 2 8				713 2.8			624 2.8	_	7 570	ł	626 2.8	-		710	-	stanica	1	ł	+	H	269	H	+	+
	Maximum permitted	71 05	, s	L		itrov	4			9		2			'n		603		9	2	791		7		į.	9	- 1	ò		9	L		7		avna	204	ŀ	L	Ł	9	Н	-	+
permitted speed	Leff track	1	40	.03		- Dim											30											ľ			20		Ī	08	evog	70	į	70	3	OC.	09		50
mumixeM	Pight track		Ŋ.		italic	S Niš											8,4																J		Panc	70	ŀ	20			100		ľ
Á	Railway line categor	22	3 8	23	are presented in italic	100	13	D3	D3	D3	D3	D3	D3	D3	2 2	3 2	23	D3	D3	D3	D3	000	53	D3	D3	D3	D3			à	04	D4	D4	D4	D4	D4	D 0						
3	Class of railway line	0 27	N	M	preser	Ì		100	Z	1		M	×	Z,	Z ;	Z >	2	Σ	Z	M	M	Z		-	M	-		3 2	-	-		8.8	M	M	grad Centar	Z	1	1		M			2 2
euil	Single/double-track	- b	ړځ ډ	52		Ī	113	S C	2 0	2 02	102	02	W	SZ I	מ מ	מ מ	2 00	v.	2 02	S	S	ď	202	v v	W	7/2	02 0	2 0	2 00	S	S	202	ω			F	10	П	Д	D	А	Д	2 00
1	Type of service poin	0 -	7	13	of wo	Ī	-	17	2 %	, -	3	1	3	7	٦, ٦	0 %	2	6	0	3	Ä	ы	7	n m	3	2	e .	- 0) m	-	3	3	1	13	107 Bec	1	+	+	1	2			4
	ice point				able before the commencement																																						
	Name of service point	STROTTON TRRETAIN	SUBOTICA	STATE BORDER	On line sections where the works are being executed the data that were applicable before the commencement of works	oi I	NIŠ	JUNCTION POINT 4 NIS	VOINA BOLNICA	ĆELE KULA	EI NIŠ	NIŠKA BANJA	PROSEK	SICEVO	OSIROVICA MATRAN OCTROCICA	MAJDAN OSTROVICA	DOLAC	CRVENI BREG	CRVENA REKA	BELANOVAC	BELA PALANKA	CRKVICA	CIFLIK	SINJAC DURĐEVO POLIE	CRVENČEVO	STANIČENJE	SOPOT	PINUI	VELIKI IOVANOVAC	SUKOVO	ČINIGLAVCI	SREĆKOVAC	DIMITROVGRAD	STATE BORDER	DESCRIPTION OF STREET	PECCENAL CENTAR	VIIKOV SPOMFNIK	PANČEVAČKI MOST	KRNJAČA MOST	KRNJAČA		OVČA	18+206 PANCEVO VAROS
	chainage	175+650	176+474	184+582	works are being		0+241	0+736	3+400	5+461	6+200	10+500	14+700	17+148	600-77	20+500	31+700	34+300	36+426	39+680	44+912	48+500	53+500	58+800	61+900	63+817	67+300	000192	81+700	86+193	90+500	92+700	97+423	103+930	Tooolo	1 +333	2+800	4+688	7+100	8+120	186+6		
	Distance in km	3 688	0.824	8.108	there the		110	0.495	1.030	2.061	0.739	4,300	4.200	2.448	1050	5 741	2,200	2.600	2.126	3.254	5.232	3.588	5.000	3.300	3.100	1.917	3.483	3 065	4.800	4.493	4.307	2,200	4.723	6.50		1 223	1.568	1.888	2.412	1.020	1.861	2.511	*3,007
public transport	ь Гец track	7		1882.	ections w	İ	Ī	-1-		-	1	£4,	9	7.	1	1	1	1=		L		- 1	L		1		-1	- 57	+	1		L	1		٤	66	1.20).E.S.		L			+
handover to	- Right track			05.12.1882.	a line s								01.06	1887.													1.11.	201							5	66	1.20) E 7	0	\$26	1.11	1.11	11.10.1935



	Doading gauge Altitude	46			4		-	0./8 1-82 7-8-1	ŽS-I		723-1 87.0	105.3	ŽS-I 171.1	ZS-I	LSZ	ŽS-I 117.9		7S-I 35.3	ŽS-I 108.5	+	Н	ŽS-I 123.6	78-1 1-8Z	ŽS-I	Н	+	ZS-I 264	ZS-I 388.5	H			ZS-I 411.9	+	75.1	1-SZ	-	ZS-I 311.6	ŽS-I	ŽS-I	ŽS-I	1-S2-1	1
resistance of the line [daV]	←	7 28 2	9	2	11	∞	ŀ	<	Ž	4	0		ı	,	×	9 Ž		n d	0 4		1 Ž	3	2 2	, X	Ž	e		16 - Ž	a		16	Z 91	-	7 %	286		8	Z	4	Ž	7 .	2
Ruling gradient Ruling	Slope				10	8	1	0		4	5		1 0 12	c	+	8		4 6	0 4		1 4	2 4	-		Ĭ.	н	0 17	0	0	1.0		15	-	ø	İ		9		0 8		c	0
	Gradient of the statio	24 25	1,34 8	_		6,2 3	0,7	0.7	0,0		3,0,1	89	2.5 11	+	0 1	0 0		0 -	1.5		1 3	1.7 4	2	1			1.2 15	2.5 16		11 27 . 1		2 0	_	0 7			7.5 0		89	i	2.5	L. 1.1.1
sn	Minimum curve radi	23	300	200	350	350	009	000	200	300	COGI		300	90	400	400		400	450		200	450	500	3	Ž	009	300	300	300		300	300	903	onc			200				009	- DAG
freighF Franspo	Open for passenger /	22	P/F	P/F	P/F	ы	Ъ	P/F		P/F		P/F	P/F	4	4 0	P/F	P	P/F D/F	P/F		P/F	P/F	P/R	P 4	Ъ	P/F	A, P	P/F	Ъ	Ъ	P/F	P/F	A 6	4 6	ц а,		P/F	Д	P/F	A 6	70	11/1
	Side-/end-loading pla Occupancy of service		+	S	\vdash	S	+	2		S/E P	-	S	n s	+	3	S	-	200	2 5	+	S	S	1	+		S	Þ	P	U		-	S	1)		+	S2 P4	H	Ω	ł	+	
	Freight car scales	19					1			Yes	1			1			ij	I	I				I	İ	1		1					1	1	1	İ		Xes	İ			İ	
DIU	Service point code -	18	21002	21003	21004	21005	21006	21008	2007	21009	66017	15501	15201	15202	15204	15205	15206	15207	15209		15260	15211	15212	15214	15215	15251	15101	15102	15103	15104	15105	15106	15109	70151	15113		15150	15111	15110	15114	15108	-
he service poin	Manner of securing t	17	7	7			00	×		2		1	ce 1	, ag	9 9	ce 1	90	- Ce	9 9	e e	ce 1	ce 1	1	1 e3	e c	I as	I ce	1 93	ce 1	eg	ce 1	T es	eg .	3 3	y 93	+	1 L	9 93	ce I	e Ce	L ce	40
noitslu	Mamer of traffic reg	16	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	Rijelo Polie)	(alice coalice	RC with station distance	RC with station distance	RC with station distance	RC with station distan	RC with station distance	RC with station distance	RC with station distance	RC with station distance	RC with station distan	RC with station distance	RC with station distance	RC with station distance	RC with station distance	RC with station distance	RC with station distance	RC with station distance	RC with station distance	RC with station distan	RC with station distance	RC with station distance	RC with station distance	RC with station distance	RC with station distance		RC with station distance	RC with station distance	RC with station distance	RC with station distance	KC with station distance	William African Contraction
в⇒А	Tracks for acceptance of the longest trains	1.5	2 and 3	3 and 4	3 and 4	2 and 3		2 and 3		4 and 5	- 19		4	T	0	3	Ħ		5 1	Ħ	4	3	ď	Ħ	I	T	7	3				9	T	2		3p	T		3			
Direction	Maximum permitted train length	14	699			799	1	000	Ì	643	- ctate	730	595	3/20	90/	574		204	602		652	109	600	700		593	220	366	544		552	544	079	343	İ	349p	6491	Ĺ	553	Ī	5,03	
B←A	longest trains	13	2 and 3	3 and 4	3 and 4	2 and 3		2 and 3		4 and 5	- Vrhnica - state horder		4	,	2	3	١,	e -	5 5		4	3		,	Ì	4	2	3	3		3	9	c	0	Ĭ	e 2	1		3			•
Direction	Maximum permitted train length Tracks for	12	663			7 7 7	1	000		643 4	- Požega	730	594	100	1///	572		594	109		649	298	900	200	4 4	969	553	368	543		554	544	133	100	i	292p	6471	t	554	i	386	
sbeed speed	rett track	11				_	100				30 ontar) - Pecnile		0 /		85			06		95	-	1	901			1						20	-1			305	Ť		9	1	1	
mumixsM	Right track	10				1.0	=			ľ			8		8			^		6				4								ς.					ļ	4	-	1		
	Railway line categor						-	70	-	_	M D2			<u>7</u>	1		- 1	D C	+	+	+		D 74				D4	1		-		-	+	+	D 7	_	D4	+		_	7 5	
577	Class of railway line	Н	-	S M	\vdash	-	+	z z	+	+	-18	4	- 1	+	N N		-	N N	+	+	\vdash	+	S S	+	Н	+	S S	2 02	Н	Н				-	N N	1	S S		S	+	N O	
	Type of service point	Н	+	Н	1	+	e .	e	-		13 5	11	-	+	4 60	\vdash				-	-1	+	m -	+	Н	-	C1 P	+	Н	3	+	+	ο ₂ .	+	0 (0		- 6	-	\vdash	+	n -	
	Chainage Chainage Service point	4	15.801 34+007 BANATSKO NOVO SELO	45+855	53+554	59+041		7.300 7.0+537 ULJMA 4.963 75+300 VLATKOVAC			15.461 98+314 S1A1E BUKDER	0+425 RESNIK	7+637	4.568 12+205 NENADOVAC	17+90	23+094	27+738	2.889 30+627 STEPOJEVAC	8.124 45+386 LAZAREVAC	46+900	52+600	58+982	4.918 63+900 MLADEVO	69+243	73+700	77+724	6.846 84+570 VALJEVSKI GRADAC	94+048	103+145		111+352		123+400	7594671	2,200 135+800 GLUMAČ	1	4.987 140+787 POZEGA 1.702 143+480 ITIN/CITON DOINT \$3 DOŽEGA	145+6001	149+262		2.700 154+200 BUKOVICKA KAMPA	7/0-00
110qem 14	Distance in km	H	15.8	11.3	7.4	*5.	3.	7	9	Щ	-		7.	4 6	2.3	3.	4.1	2, 7	0 00	-	5.	9	4 6	2.0	4.2	4.0	9.	2	9.6	4	3.0	7	1 v	ò	2.2		4	3.5	3.6	2	.7	
handover to public transport	Right frack Left track	H	26.08.	1896.			08.12.	1894.		92.0	20.07.1858.			29.11.	,000		29.11.	1958.		07.07.	.908.		20 11	1968.										25.07	1972.							



	əbutitlA	30	418.4	520.5		100	0.51	784		612.5	531.5		390.3		447.7		453.2		505.2	561.5	553.7			109	9 000	3	Ī		153,0	0,171	200,1	236,5		241,9	239	017	210.3		187,7		202.4
	Loading gauge	56	I-S	ŽS-I	ŽS-I	ZS-I	75.1	ŽS-I	ŽS-I	ŽS-I	ZS-I	ŽS-I	ŽS-I	ZS-I	Ž8-1	ŽS-I	ŽS-I	ŽS-I	75-1	ŽS-I	ŽS-I	ZS-I	Ī	ŽS-I	ZS-I	ŽS-I	Ž8-I	ŽS-I	ZS-I	7.S.T	ŽS-I	ŽS-I	Ž8-I	ZS-I	I-SZ	1.07	ŽS-I	ŽS-I	ŽS-I	ŽS-I	7.S-I
the line [daV]	←	28			7			2	\vdash	18	16	_	17	N	4		4	8	-	1	Н	2	H	3		-	7.7	-	4 6	+	1	-		12	+	7	20		8	1910	8
Ruling resistance of	→	-	18	18	Ħ	9	2 8	16	-		١.	Ħ		Ť	cc	,	7	10	10	6	S	œ	F	6	,	,			01 0	7	8	11		12	4 (7	3		3	T	∞
gradient	Slope	26	0		7		0	_	1	17	16	E	17		67	,	3	1	-	0	9	S		64	(m c	4	0	0	-	-1	3	٥	4		14		F
Ruling	Judine	_	16				17	2 0.5		0	0	-	0		00			00	10			00		ç4	_	9	4	_	00 0		1	1000		100		-	2	1	0		1
[0%] U	Oraclient of the statio	24	2.5	2.3		,	1.5	2		2.5	2		0	1	1.5	3	1.5	1.5	1.5	2	0			2.4	2.0	4.5			7.1	2.0	4.3	7.0		4.2	2.4	2.0	4.5		1.8		1.0
sn	Minimum curveradir	23	400	350	1		400	400		300	300		300		300		350	400	350	400	400			250	033	200	Ī		550	000	300	300		300	375	nne	300		300		290
qansıT Tdgiərî	Open for passenger /1	22	Ъ	P	ď	d F	P/F	T d	Ы	Ъ	Б	P	P/F	<u>ا</u>	P/F	ė,	P	P/F	A, D	Ъ	P		Д	P/F	4	Д	Ъ	Ъ	P	P	P/F	Ъ	Ь	P/F	d F	P.F	P/F	ď	P/F	Ъ	P/F
iniog a	Occupancy of service	21	Д	D)) F	þ		Ð	Þ		Ъ		11		Þ	д	þ	D	Ъ		ā,	Д	þ	0			Þ	4	Д	D		Ы	Þ	4	Þ		Д		Д
attorm	Side-/end-loading pla	20											ďΩ					Ø						S					ō	2	02	ďΩ		σ	so c	2	ζ.		S		V.
	Freight car scales	19						Ì							Ì	M												ľ								1	ij.				
orc	Service point code -	18	15153	15701	15716	15717	15703	15704	15705	15706	15721	15720	15708	15722	15710	15718	15711	15712	15713	15714	15715	15723	13450	13201	13202	13204	13205	13206	13207	13209	13210	13211	13212	13213	13214	13331	13216	13217	13218	13219	13220
ne service poir	Manner of securing t	17	1	1		,	-	1		1	1		1		-		1	-	-	1	1		7	œ	ō	•			ο v	9	00	×		œ	œ ,	-	80		00		Ą
noitslu	Manner of traffic reg	16	RC with station distance	station	RC with station distance	RC with station distance	RC with station distance	RC with station distance	RC with station distance	RC with station distance	RC with station distance RC with station distance	RC with station distance	with	RC with station distance	RC with station distance	RC with station distance	RC with station distance	RC with station distance	RC with station distance RC with station distance	RC with station distance	RC with station distance	Koccoro Dolles Deneral Tentrociós sette bordes (Wolfron)	order - (volkovo)	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance
	acceptance of the longest trains	1.5	1 R	1 R	R	Ť	3 K		П	2 R	- R	R	4 B	NG P	3 B		3 B	5 R	3 12		3 R	- chate by	5 and 6	2	c	,			6 6	2	2	2		2	7 :	2	2		2		4
Direction B→A	train length Tracks for	.4	346	547	÷	9	786	531		536	572	H	553	t	549	1	307	499	552	969	544	- Jaoque	563 5	099		77,			734	F	558	632		614	620	200	597		746	7	738
	longest trains Maximum permitted	P	3	35		,	0 4	1 60		3	3	H	5	+	4	+	3	4	v.	9	Ś	- Industrial	3 5	9	t	*	H		20	à	8	9	H	9	0 1	ñ	S		7	+	7
Direction A⊸B	Tracks for acceptance of the	13	1	1		,	2 6	0 60		2	-		4		6	1	3	S	65	-	3	olio - Plor	2 and 3	2	c	2	L			7	2	2		2	c4 (2	2		2		4
	Maximum permitted train length	12	353	545		000	186	531		550	574		551		551	100	307	495	553	738	547	Dono De	530	099	400	77			734	140	558	632		614	620	160	597		746		738
permitted speed	Left track	11			50			70		50				30	2					50		Salv - Vo	odr - Wo	20			100		7							40					
mumixsM	Right track	10									_											Ješe I. o	27							L								_			
K	Railway line category	6	D4	D4	\rightarrow	-	2 5	-	+ +	-	7 7	D4	D4	7 2	+	D ₄	D4	-	D 0	D4	D4		na levo	-	3 3	-	Н	-	8	+	4	8	Ð	O	8	3 8	3 8	-		Ð	8 8
	Class of railway line	8	M	M	M	Z :	Z	Z	×	M	ΣZ	M	×	Z Z	2	Z	×	Z,	ΣZ	Z	M	Z A		×	Z	Z	×	×	Z Z	Z	×	×	×	×	Z;	2 2	Z	Z	Z	Z	ΣZ
ņue	Single/double-track l	۲	ß	Ø	ď	S S	20	2 02	Ø	S I	N N	S	ď	o o	0 00	02	ď	02 0	N W	S	ďΩ	S	103 Lapovo - 10	ď	מ מ	2 02	ß	ß	o o	מי מ	ď	Ø	S	S	so c	20	2 5/2	ď	Ω	S	co co
1	Type of service point	9	1	2	3	en e	7	4 11	3	2	2 3	3	Ð	en e	- 0	3	I	(2 5	5	1	13	100	1	m +	3 6	3	3	1	4 6	-	f	3	-	1	- 6	1	n	1	3	- 3
	Distance in km Chainage	4.	1.981 163+881 UŽICE	6.763 170+644 STAPARI	173+400	176+000	6.350 1/84500 SUSICA 6.875 1854235 RPANRČCI	193+320	200+300		6.193 211+600 GOLES 3.232 214+832 ŠTRPCI	219+500	225+290	3.010 228+300 POLJICE		5.022 246+300 DZUROVO	252+616	255+856	5.041 254-641 LICTUR	273+329	285+193	2.245 287+438 STATE BORDER	0+666 LAPOVO		4.895 8+300 GRADAC	15+800	18+451	20+600	1.735 22+335 JOVANOVAC	31+300	34+100	39+551	44+600		53+474	1 502 62 HONDEREVAC	66+335	70+081		79+100	2.800 81+900 SIRCA 2.844 84+744 KRATIEVO
transport	Гей ітаск	2					y	.9761									21.05.	1976.								03.03.	./90/	-	i					7		1000	Ň.				
public							- 2																			20 8	-									-: -	27				



	əbutitlA	30		271,4		233,4	262,7	304,2		343,1	270.8	3/3,0	393		406,3		416,5			100	441	151	1		470		491	406 6	2000	497		93,7	1,00	2,00	2 20	87.8	88.2	8,68	119,6	118,3	124,6	124,7	177	119.3	113.2
	Loading gauge	50	ŢS-I	I-SZ	ZS-I	ŢS-I	ŽS-I	ŢS-I	I-SZ	I-SZ	7c-1	78:1	ŽS-I	ŽS-I	ZS-I	ŽS-I	ŽS-I	ZS-I	I-SZ	ZS-I	1-57	1.07	1-SZ	I-SZ	ŽS-I	ŽS-I	ZS-I	76.1	I-SZ	ŢS-Ţ	Ì		7.S-1	70.1	1.05	78.1	78-1	Zs-I	ŽS-I	ŽS-I	ŽS-I	I-SZ	75.1	1-8	ŽS-I
the line [daN]	←	28	14		2.4	5		6	140	1	4 10	1		-	5	4.8	9	~	-	141	1	× ×			4	14	-	1 4	+	~~	ł	H	0 .	4	-	1 4	+	-	1	S	-	4	7 0	+	9
Ruling resistance of	\rightarrow	27		9		5	00	6		00	Ċ.	o u	2		w.		9	i			0	o		İ	60	T	L 4	2 <			Ì	П		-	ç	2 6	1 0	3	9	3	Ì	v	,,	1	5
tradient	Slope	26		0	1	3	0	1		0	c	0	0		4		3	1		4	0	c	4		-		- 0	0 0	,			,	n.	-	-	1 4	ı v	-	Ħ	S	Н	4	,,	,	9
gniluA	Indine	25		S		5	9	7		9	t	4 77	য		4	1	4			,	9	V			'n			1 4					o •	-	,	0 4		6		3		4	,		3
[096] u	Gradient of the static	24		0.4		0.8	6.7	1.0		7.0	Ad	4.1	2.2		0.4	1	4.8	1			0.0	0.0	0.0		0.0		2.0	0.0	25				0.7	7.0	0.0	0.0	0.0	6.0	0.0	1.3		2.5	3.6	5.7	1.0
sn	Minimum curve radi	23		300	1	300	300	250		300	02.0	300	250		300		300	300		000	300	300	ooc		300		300	300	200	300		0000	3000	2000	0000	1900	1090	006	3000	3000	1900				610
dsusiA Adgiəri	Open for passenger	22		P/F	P	Ъ	P	Ъ	P	P/F	P/C	D/F	P/F	P	P/F	P	P/F		P	P	F/F	D/E	P	Ъ	P/F	P	P/F	D/F	7/7	Ъ		100	P/F	F	D/D	P/F	P/F	P	P	P/F		P/F	D/E	177	P/F
anioq ə	Occupancy of servic	21		Ь		Ω	D	Ω		Ы	f	·F	2		Ы		n		A	1	4	è	4		Ъ	I	b	o A		D		,	4 ;	5	F	- Д	0	Ь	Ω	Ъ		þ	٥	1	Q.
шода	Side-/end-loading pl	20		S	1		Ĭ			S	Ü	2			w		S					Ü	2		ď		σ2 c	20	2				n				S/E		V	Ĭ					S/E
	Freight car scales	19			1	П	ij				Ī	Ī				Ī	ī	ī			Ī	Ī				Ī		Ì					Ĭ	İ		Ī	Yes			M			ľ	Ī	Ī
oic	Service point code -	18		12101	12102	12103	12104	12105	12116	12106	12107	12108	12109	12110	12111	12112	12113		12117	12114	10071	12002	12021	12004	12005	12019	12006	12008	20021	12022		25471	254/0	10007	25503	25502	25550	24401	24403	24404	24405	24406	24407	24409	23450
he service poin	Manner of securing t	17		8		4	4	3		2	C	۰ ۳	8		'n		×	3		ŀ	1	-	1		Н			4 C	3	10		ŀ	٠,	0	ų	n ur	া ব	47	5	5		S.	v	1	4
noitslu	शिशक्ताल वर्ष धर्मोट १९९	16	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance		100	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance
ν. σ	acceptance of the longest trains	15		3		2	2	2		2	,	2 -	2		2		2				77	,	2		3		3		4	1	rdut)		3 and 4	come	C Pour	2 and 3	3 and 4	2 and 3	2 and 3	3 and 4		2 and 3	7 and 3	Comme	2 and 3
Direction B→A	Tracks for	4		631	Г	727	30	859		586	KAA	1005	576		219		889		7		4/3	670		H	576	Ħ	539	545	-	140	Jer - (E		6 75/	1	1	2 116	_	524 2		506 3	\neg	617 2	733 0	1	594 2
	longest frains Maximum permitted		H	9		7	9	9	4	2	V	5 =	3	-	9		9		H	-	4	+	+	H	35	4	40 4	2 6	>	1	ate por	+	+	1	+	+	+	H				+	+	+	-
Direction A⊸B	Tracks for acceptance of the			3		2	2	2		2		1 -	2		2		2	Ü			7	2 and 3	+	L	3		e -	Ī	1	1	110 Subotica - Bogojevo - state border - (Erdut)		3 and 4	C DIIR 7	+	2 and 3	+	2 and 3	2 and 3	3 and 4		2 and 3	9 and 3	+	2 and 3
	Maximum permitted train length	12		631		727	630	859		586	647	1005	576		657		638			,	4/9	610	OTO		587		540	100	2	137	- Bogo	002	730	CTC	400	673	505	524	522	525		617	716	OTY	594
sbeed beenitted	Feil track	11						40 (20)							(60)	(00) 00		I						50						10	potica	30 (40)							(05)	40 (20)					
mumixsM	Right track	10	L					40							5	200															110 Su	30							40	7					
λ	Railway line categor	6	ខ	ε	ខ	ខ	ខ	හ	ខ	8	3 8	3 8	8	8	0	Ð	ε	ප	ខ	8	3 2	3 5	3 E	D3	D3	D3	D3	3 2	D3	D3			3 2	2 2	200	2 2	133	D3	D3	D3	D3	D3	20	23	D3
R	Class of railway line	8	M	M	M	M	M	M	Σ	∑ ;	Z	2	×	×	M	M	M	Z	Z	≱;	Z ?	2 2	Z	×	×	Z	Z Z	Z Z	Z	M			≅ ;	2 2	* >	2 2	2	×	M	X	M	Z,	Z Z	2	Z
əui	Single/double-track l	7	ß	S	S	S	S	S	S	S C	20	2 0	S	S	S	S	S	S	S	02 0	N C	2 0	2 02	W	ß	ď	to to	2 0	2 02	S	Ц	-	ממ	ממ	2 0	2 0	V.	S	Ø	ß	S	20	20	o co	S
1	Type of service poin	9	12	1	3	1	2	1	3	1	5	8	1	3	ī	3	1	13	3	3	1 0	2 -	3	3	1.	3	1	0 -	12		-	13		1 4	0 -	1 -	-	7	1		3	1	5	3	7
	Distance in km Chainage Name of service point	4.	0.970 85+714 JUNCTION POINT 72 KRALJEVO	8.199 93+913 MATARUŠKA BANJA	97+400	3	7.962 108+861 DOBRE STRANE	118+113	123+600	127+293	3.307 132+800 LOZNO 3.333 136+133 IOŠANIŽVA BANIA	138+313	143+453	147+600	152+310	5.390 157+700 KAZNOVIĆI	161+988	164+400	165+600	168+924	3,3/6 1/2+300 LESAK		188+000	188+500	3.800 192+300 IBARSKA SLATINA	195+700	6,300 202+000 BANJSKA		213+267	*0,120 0+120 KOSOVSKA MITROVICA SEVER		41+076	43+815	0.521 SOLKOS CORNITAR HINCHION SONTA	0000000	-	73+459	83+369	97+501	7.671 105+172 BAMOK	111+845	115+374 T.	5.183 118+557 LJU1OVU 5.564 173-1741 ŠEBRŠIĆ	128+221	134+538
public transport	Гец цяск	2	Ī	35.	H.	H	35			Ä		.96	.T.	Ī		2		. 77.	Ī	ĺ				72.	11.					M				11.	.0.		1					6			
handover to	Right track			24.05	1931.	31	80 20	1031	3			07.08.	193			12.03	1031	2						12.02.	1931.					Ш				20.11,	1870.						11.11	1869.			



handover to transport	Right track Left track	1	150	28.05.	1967.		02.08. 1970.	tance be	90,00	1970.	28.05.	1967.	28.05.	1967.	32.08.	1970.		20.10. 1988.	100	02.03. 1970.	ance be	13.03	1970.	28.05.	1967.			0.12.	1883.		09.12.	2000	
المرسدورين	Distance in km	m	1	3.300	11.200		5.902	ween Belgr		2.776	6.081	1.562		2.121		3.123		0.903		5.250	ween the op		0.709		0.463	1 401	177.1		+3,527		1.850	*1,978	2,15
	Chainage Name of service point	4	0+000 BEOGRAD MARSHALLING YARD A		14+500 SURCIN 25+658 BATAINICA		0+000 BEOGRAD MARSHALLING YARD B 5+902 OSTRUŽNICA	Distance between Belgrade Marshalling Yard B and Belgrade Marshalling Yard A via junction points	A create the state of the control open of		8+857	10+419 RESNIK	000+0	2+121 OPEN LINE JUNCTION B	Ш	6+309 OPEN LINE JUNCTION R 6+309 OPEN LINE JUNCTION A		4+895 OPEN LINE JUNCTION R 5+798 RAKOVICA	5+250 BEOGRAD MARSHALLING YARD A		Distance between the open line junction T and Ostružnica station is 5604 m	1+774 BROGB AD MADSHALLINGS	2+483 OPEN LINE TUNCTION T	8+872 OPEN LINE JUNCTION K		0+000 KARAĐORĐEV PARK 1+401 DEDINIE		968+0	1+949 INDIA TI 4+708 GOLUBINCI			3+689 SAILOVO	0+000 JUNCTION POINT1 MALA KRSNA
	point		YARD A				YARD B	halling Yard A via ju		TAKUA									YARD A		5604 m	VAPDB	110 Connecting track at the area of the Owen line innertion (FCR). (Orea line innertion (FR)).	Supplied	120 (Open line junction Pan					į.	AD YARD	123 D	Ш
1	Type of service poin	9	-	-			1 1	nction p	13 Beog	1 9	9	-	=	115 Beograd marshalling		0 0		1	Ξ	۰,	-	-	9 5	9	fion Pan	r- v	2	1	1 14	-	1 12	123 Deviation	172
	Single/double-track	7		+	S S	1 1	S	oints 3(grad ma	S	H	S M		SM		s s	116 (S	117.1 S M	H	2	118	SM				- 1	-	N N	122	-+		
	Railway line categor	-12		M D4		1 1	T D4	302, 300	rshallir	100		114 Ostružni		A D4		M D4	0	A D4	I7 Beograd	++	4 D4	Beogra	A D4		S M D4	M	-	_	A D3	22 Novi Sad		f the sta	N.
mumizsM	W.O. (200) - COD (40	9 10 11 12 12 eograd MARSHALLING			_	m		and track	ig yard			5	3	Tranc	7				mar			dmarsi			- 1	1100		08		Sad - Novi		ation M	L
permitted speed	Pett fisck	ARSHA		30		ad MAI	50	ck loco	'A"-0	09		20 Onen lin	30	"""		30	nalling	30		30	02	nalling 3	30	0.0	line iun	70	ľ	80	80	vi Sad	50	ala Krs	100
Direction	Maximum permitted frain length	LING		1	733	SHAL	750	oco Makiš 2	pen line			20 730 3	845	men line			marshalling yard "B")	702	ing yard "A"	000	707	vard 'B'	21/21/100		ction K		21 Indij	644	655	marshal	798	na: (Kol	
A⇔B		YARD"			m m	eograd MARSHALLING YARD "B"	2	is 2914	unction			3 m "B" - (3 and 4	Onen line innotion	mamil			Ą	"-Open		य	- Open	1 " (One		aradorde		Indija - Golubine	1 and 2	2 and 3	ing yard	1 and 2	ari) - iur	
	longest trains Maximum permitted train length	"A" - Os		750	733	4RD "B	750	14m	"B" - O	(0)		730				-	line jur	702	line jun	1	707	line jun	- in	1	w park	\parallel	inci	995 2	3 749	1 - Open	2 798	retion pe	$\ $
noirection B→A	train length Tracks for Tracks for	- Ostružnica - B	7 and 8	2 and 3	ъ С 4	" - Ostružn	2		pen line ju	o and		Open line innertion	2,3 and	Onen line			- Open line junctionN "R"	5	line junction "T" - Rakovica		0	118 Beograd marshalling yard "B" - Open line junction "T" - (Rakovica)	inction "R'		Open line			3 and 4	4 and 5	Sad marshalling yard - Open line junction Sajlovo	1 and 2	oint 1 - jun	
սօփեևոչ	Manner of traffic reg	atainica		station distance	station distance	8	station distance		113 Beograd marshalling yard "A" - Open line junction "B" - Open line junction "K/K1" - Resnik	station distance	station distance	station distance	1	Open line innetion "A". Desmit	TO TOTAL	station distance	4	station distance	Rakovica	station distance	stanon distance	(Rakovica)	station distance 1 station		Open line iunction. Karadordev park - Open line iunction Declinie - (Open line iunction	AB with TWT			AB	on Sajlovo	station distance	S M D3 block post distance 11 block post distance 11 ask of the station Mala Kisna: (Kolari) - junction point 1 - junction point 28 - (Osipaonica)	22 11100
the service poin	Manner of securing I	17	1	1			1 1		snik		-1	-	-	1				1	-	-	-		1 1	1	Open lir	Ξ-	-	11	1		1 4	paonica)	-1-
nic	Service point code -	18	16201	16202	16203		16201		16701	10701		15501	16202		16201			16103	16021	200	10102	16201	"- (Taiin	and and	le function	16053		10891	16505		16871	23301	
шодь	Freight car scales Side-/end-loading pl	19 2	H	S	S S		Yes		ŀ	t		ζ2	S		Yes	t		+		H		Vec	3 6	<u> </u>		H				t	Yes		Ħ
-	Occupancy of servic	21	Ь	+	<u>Б</u>	1 1	SPP		9	ı D		ď	\vdash	D	Ы	I		Ъ	۵	ļ	4	٩		U	Ω			P	Ь		А	д	Ħ
FranT Tagieri	Open for passenger	22	H	H	P/F		H		F	4		P/F	Ŀ	V	H			Ъ	įr.	ļ	<u>,</u>	Ġ	4		1	д		Ь	P/F		Į.		
śn	Minimum curve radi	23		009	300		300			350	200	350		009		400	Ĭ	300	Ī	500	nne			Ī	009	180	70.7	1.2	3000		400	700	
		24 2		-	0.0	1 1	Ť		Ė	Ī	2	Ĭ	Ī			5.6	1 1	Î	T	Ì		Ī	Í	İ	0.0	Ï		5.5	0.01/		-	4.5	
Ruling gradient		25 26	H	7	2 5	1 1	7 1		ŀ	15 0		1 0	-	3		2 1		3	-	+	0		5		0 2		-		1/11 7/0	Į	\rightarrow	3	
Ruling resistance of	1	27		80	2 2		6			17		_	10	3		0 4		7		4	#	1	9		X.	4			2/12		ъ	3	
the line [daV]	← Loading gauge	28 2	2	+	5 ZS-I		2 ŽS-I			- ŽS-1	-	11 ZS-1	-	4 ZS-I	, al	1 ZS-I		5 ŽS-1	ZS-I	++	-c7 0	-	1 ŽS-I		2 ŽS-I	78.1	1	*	2S-1 8/2 ZS-1	-	-	3 ZS-I	1
	.000	_	11/	4	7 7		17	ш		17	4	7	13	ᅻ		7	П	7	17	17 1	7		77	1111	7	1437	+	10	7 7		7	7	1 1



	Altitude	30	102.6	0.701	105.5					188,8	187,7							113.2	110.4		1.07.7	105.7	90.7	85.7	77	77	77	80	82	105	70	78,0	80,0	81,0	81,0	81,3	78.0	77.6		8,08	80,8	208
	Loading gauge	73		ŽS-I	ŽS-I		79.1	ŽS-I	ZS-I	01	1-87		ŽS-I		ŽS-I			ZS-I	ŽS-I	ŽS-I	ŽS-I	75.1	ZS-1	žs-ī	70.1	2	ŽS-I	ZS-I	78-1	78-1	ŽS-I	ŽS-I	ŽS-I	I-SZ	ZS-I	1-S7	75.1	78-1	ŽS-I	ŽS-I	I-SZ	75.1
resistance of the line [daV]	←	28		- 1	٠	ij	V		50		7		7	Ī	9				'n		3		। च	'n			7	- ×	4 -		3	4	•		7	4 1	,	2		П		1 0
gnilnA	→ adore	6 27	Ł	3	Н	ŀ	4	1	-	-	0		64	ŀ	'n			4	-	L	1	c	+	4	ŀ	H		C1 +	-	1 1	4	3	4		S	+	0	4	H	Н	7	1 6
Ruling tradient	Slope	25 26	H	1 0	3 0	ŀ	4	-	3 6	-	0		S	H	S		ŀ	t	1 5		1 3		+	5	H	H	1 2	7 -		10	+	6	4 0		5	+	5	5		Н	7 7	7 6
[0%] uc	Oracli ent of the static	24		3.0	0.0	1					4.0			Ī	1			1.0	0.0		1.8	0	2.0		0.0	0.5	0.0	0.0	0.5	0	0.5	0.0	0.0	0.0	0.0	3.0	0.0	0.0		0.0	0.0	0.0
sn	Minimum curve radi	73	ĺ	500	200		300	1000	420		903		400		293				300		3600	3600	1500	3600		350	009	300	1000	1000	400	300	300	200	650	400	200	200		1000	200	000
qsus14 Tdgiə11	Open for passenger	22	۵	Æ	Ъ	E C	P/F		щ	P/F	P/F	P/F						P/F			P/F	4	P/F		D/E		ы	P/F	P/F	P/F	Ы	P/F	Ы		P/F	P/H	E/E	P/F			P/F	P/F
	Occupancy of servic	+	۵	Ъ	Ъ		д <u>Б</u>	П	Ы	Б	4	P		Ī	Į			Ъ	D		P	11	D d		Д	ņ	Ω	Þ	D 0	į	n	Ъ	P		H	J 6	4	۵		\vdash	+	- E
шоде	Side-/end-loading pl	-	Ł	Yes S			2 0	H	+	Ω 2	w .	S/E	_	-	ł		ŀ	S/E	ł	H	4	4	+	4	Ved Q	Sec. Se	-	Ω O	2 00	2 07.	2 02	σΩ	6	4	Ω.	Yes	7/2	2 00	L	Н	co c	מ
	Freight car scales	Ħ	y		Н		O Vec	\vdash	<u> </u>		II Xes	-	H	-	H		ŀ	0	9		14	2 2	7 =	6			2	2 2	2 12	2 19		27	3		-3	_	2	2		H	Z :	0 4
DIN	Service point code -	18	13405	13407	13450	1	12516		12301	\rightarrow	17601	12551	Ŀ					23450	23706		23704	23703	23701	2315	22001	100	22002	22003	22005	22006	22201	22202	22203		22204	22501	00077	22503			22504	20527
he service poi	Manner of securing t	17	÷	4	н		e e	-	-	-1	-	I	1	(anla)	-			-	-		T	ŀ	-		2	4	œ	œ o	-	1 00	00	1	10	10	80	ا ا	/	-		H	00	0 1
noitslu	Manner of traffic reg	16	abovo	station distance	station distance		ΔR	AB	AB		AB		AB	station Niš: (Crveni krst) - junction point 2 - junction point 4 - (Cele kula)	AB			station distance	station distance	station distance	station distance	station distance	station distance	station distance	(ampona)	station distance	station distance	station distance	station distance	station distance	station distance	station distance		station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance
	ongest trains	I page	Junction Lapovo varos - Lapovo marshannig yard - Lapovo	10		0	1	H	-	Т	o vard)			innction	T		6	m		L														O.				L			20	2 6
Direction B→A	seceptance of the	115	- Sillen	9 and	Н	Technor	4 0	Н	1 2		rshallin	3	Ц	oint 2 -	1		(Röszk	594 2 and	1 and 2		3 and ∠	2 and 3	_	- do	4 and 5		2 and 3	2 and 3	1 6	5 6	-		-		7		z and z	2 and 3		П		2 and 3
	Maximum permitted rain length	14	BUIOA	836	563	ard - N	884		543	662	S85	488		tion p		S	rder -	_	238		643	706	919	-	S. BUIL		249	473	554	534	617	665	253		524	633	282	629	L	Ц		676
4←A	Tracks for ongest trains ongest trains	13	s - rabo	7 and 8	S	Niš marshalling yard - Međurovo	n «		1 543	3	D4 733 8 885 9	3		st) - junc		REGIONAL LINES	201 Subotica - Horgoš - state border - (Röszke	2 and 3	1 and 2		3 and 4	2 and 2	3 and 4	515/4 m	Gravita statuca - Erenjanni - Frikinua - state police	- American	2 and 3	2 and 3	3 and 4	2 and 3	2 and 3	2 and 3	1 and 2	Ĭ	2 and 3	2 and 3	2 and 3	2 and 3			2 and 3	C and 3
Direction	Maximum permitted rain length	12	O P O O	849	664	iš mars	733		580	989	733	490		rveni kr		GION	Torgoš	594	238	1	654	447		Tarrest	8.45	+	Н	473	t	+	+	-	253		524	+	282	1	+	\Box	CH I	576
pəəds	rett track		m Lapo	10		100			Christian		an line i			Niš: (C		R	otica -		t						- Pamer		Н	Ť	1	-			Н		1	_	-		Ī,	٦	+	t
Maximum permitted	Abart track	10	Junean	10		25 Trupale	30	30	106	30	S. O.	30	ř	station	30		01 Sub	50	3	100		120	71	0	S BIIABI	20		50 (70)		50 (70)		000	(n/) nc	1		30 (40)			0.0	7.	30 (40)	(02) (20)
Ä	Railway line categor	6	124 Open ime	D4	D4	-	24	D4	D4		D4		D4	of the	D4		2	2.0	2 4	D4	D4	2 2	5 6			D2	D2	D2	4	4	K	D2	D2	A	Y	B2	79	B2	B2	B2	B2	79
	Class of railway line	80	5	M	M		N	×	Z	3	Σ		×	ecting track	Z			P	4 4	R	R	× 6	4 24	1.2	Lancevo	M	×	M F	4 64	4 22	×	×	R	R	2	24 6	Δ	4 22	R	R	2	4 0
риј	Single/double-track	7	7	Д	А		V	202	cΩ		22		S		Ø	1		ō	2 02	ď	Ω.	on to	-		707	ß	ß	co co	2 00	2 0	S CO	S	S	Ø	02	20 0	n v	2 00	202	Ω	S S	n v
1	Type of service poin	. 0	7	1	1	1	-	9	-		1	1	9	128 Conne	12			1 0	00	6	1	n c	7	13	(+	9	1	-	1	-	I	1	2	9	1	1	1	1	12	6	1	1
	point			ARD				Н											TA																							
	Name of service boint	5	G-000 LAPOVO VAROŠ	LAPOVO MARSHALLING YARD	0		TRUPALE MIŠ MARSHAIT ING VARD	OPEN LINE JUNCTION MOST	SOVO	0+099 CRVENI KRST	KSHALLING YARD	244+632 NIŠ	INE JUNCTION MOS	Strength and	0+572 JUNCTION POINT 4 NIS			ICA	SUBOTICA JAVNA SKLADIŠTA	48 SC		HAJDUKOVO	VINOGRADI S	STATE BORDER	PANČEVO GI AVNA	OPEN LINE JUNCTION 2a	A	EVO	AČA	TCA	******	EVAC	ORLOVATSTOP	OPEN LINE JUNCTION 18	SVO	ZRENJANIN FABRIKA	ZRENJANIN ZBENJANIN TEPETINA	WILL LENGTHAN	JUNCTION POINT 1R	KM 102+000 SC	ŭ,	T F Z T T
			APOV	APOV	APOV		IKUPALE	PENL	EDCE	RVEN	IS MA	IŠ	PENL	TAY COL	SINCE			SUBOTICA FW 1 +812 SC	UBOL	KM 3+848 SC	PALIĆ	AČVI	HORGOS	TATE	ANCE	PENL	JABUKA	KACAREVO	DEBELJAČA	KOVAČICA	UZDIN	FOMAŠEVAC	RLOV	PENL	LUKICEVC	KENI	ZKENJANIN ZPFNI ANTN	FIFMIR	INCE	M 102	MELENCI	OMA
	Chainage	9	0+000	2+100 L	3+788 L		235+243 II	239+280 O	241+268 MEDUROVO	0+099 C	3+233 N	244+632 N	247+632 0	00010	0+572 JL			0+000 SUBOTICA	2+481 SI			11+757 H	24+018 H	27+897 S	16+10KP			26+799 K	-	-	1 -					-	207+08		-		105+815 M	121-702 KUMANE
	Distance in km	3	ŀ	2.100	1.688		2 03.4		1.988		3.134		3.000 2		0.572			1 61 2	0.668	1.367	3.808	3.663	8.599	3.879		1.463	4.675	4.465	7.467	4 510	10.436	5.668	2.106	0.715	10.835	8.803	0.000	7.772	1.555			6.687
fransport	гец изск	2	-		1			Н	-	-	-	-	-				1		10	Ц	Ц		ľ		L		Ä			_			X	Ž	-[1	1			_	
pandover to	7.7.80	H	100		0.00			1942.		1942.		10.47	7347	00.10	1887.					16.11	1870.									09.04	1884.					200	04.05.1889				08.07.	1883.
Date of	Right track		18	#61 Z	pl	Ц								Ц"	1	Ш	Ш			_										-						1	3			_		



	əbulillA	30	80,4	79,3	78,9	0,08	80,5		ì			70.3	80,4		82,0	2 8.48 C 8.48		82,5	82,5	83.6	9,68	103,9	106,6	109,6	109,4	7,511	77	7 /	82,6		81.3	84.9	84,8	85,6	85,9	85,7	84,4	8.5	85,4		
-	Loading gauge	29	ŽS-I	ŽS-I	ŽS-I	ŽS-I	ŽS-I	ZS-I		ŢS-I	ŽS-I	ľ	ŽS-I	ŽS-I	ZS-I	1-SZ	ŽS-I	ŽS-I	ŽS-I	ŽS-I	ŽS-I	ŢS-I	1-SZ	ZS-I	ŽS-I	1-07	10%	1.00	ŽS-I	I-SZ	ZS-1	ŽS-I	ŽS-I	ŽS-I	ŽS-I	ŽS-I	ŽS-I	ŽS-I	ŽS-I	ZS-I	ŽS-I
the line [daV]	←	28	3		3	9	1				ı	t	ৰ	Н	ব	· in	Н	13	1 2			ı.	2		2 .	+	j.	4			60	S	-	3		•	7	н	i	_	2
Ruling resistance of	\rightarrow	27	64	1		4	1	ı,			n		7		9	7 9		10	101	2		1	2	n	2 4	0	1]		m.	H	'n	m	2		1	1	3	ю		3
gradient	Slope	26	21	2	ż	9	н	0			0		'n		3	0 0		10	- 5	-		0	6	7	2 0	7		1		0	6	3	4	0	1	0	7	0	0	_	61
Ruling	Incline	25	2		0) 4	100	0	Ш	L	7	L	<u>ا</u>			7 9		01 0	- 5	2		2	0		2 4	-	- India			3	-	4	4	-](1	1	1	1		64
[096] tro	Gradient of the statio	24	0.0	0.0	0	7	0.0	Ц				0.0				0.0	0.0	0.0				3.0	3.2		0 +	э.	0.45		0.0		0.0	0.0	1.0	0.0	1.0	1.0	0.0	1.0	2.0		
sn	Minimum curve radi	23	500	480	475	500	1903						400		200	800	300	Ī	300	200	400	1000	1000	3000	003	2000	009	200	400		100	300	400	450	006		300	300	300		
qansı Tıdgiəri	Open for passenger	22	а	P/F		P/F	H					D/E	Ъ		P/F	P/F			P/F				P/F		a/a	7/2	P/F		А		P/F	P/F	Ь	P/F	P	P/F	Ъ	Ъ	P/F	1	P/E
e point	Occupancy of servic	21	D	Ы		ы	I			Ω		0	ı D	П	H	Þ			Д				11		P	4	ď.	0	Ы	ы	Б	Ы	U	ы	1	Ь	Ъ	n	Ъ		Ď,
ацоци	Side-/end-loading pl	20		S		S	S					V	2 02		S	v co			Ω						J/10	D/E	S		H		ζ.	ďΩ	S	ď		S		ďΩ	S		S
	Freight car scales	19				ij			1			L																													Ì
onc	Service point code -	18	22508	22509	22801	22850	22803	22899	IKAFFI	16104		22500	22601	22602	22603	22605			23801		23802	23803	23804	23806	23807	00407	21001		16808	23301	24003	24004	24005	24001	25001	25002	25003	25401	25402	25403	25470
he service poin	Manner of securing	17	80	7		4	6	000	Š	3	Ξ	t	10		6	6		ī	-	2			4		*	Ţ			-	-	80	4	10	٢	T	4	۲	10	T	-	-
noñslu	Manner of traffic reg	16	station distance	station distance	station distance	station distance		station distance	td (km / +041) - Beograd Dunay - Open line Junction Pancevacki most - Line CLOSED FOR INAPPIN 204 Tončider (km 4+195) - Open line junction .G? - (Rakovica)	station distance	station distance		station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	Station distance	to the state of th	Station distance	100	AB	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance
	acceptance of the longest trains	15	and 3	M	2.7	and 2	2 and 3	- Section of	1941) - Beograd Dunay - Open line Junction Pancevacki most - 1 204 Topčider (km 4+195) - Open line junction "G" - (Rakovica)	12		ca and 3	2 60		and 3	and 4	H	m	2 and 3			7	and 3	Ĭ	2 mad 3	_ (a			and 5	ł	2 and 3			and 3		2 and 3	and 3	1 and 2	and 3		3 and 4
Direction B→A	train length Tracks for	L	2	2	H	T	\vdash	Jong	n G"	5	- 9	Subotic	1	П	7	m	Н			+	H	+	2		$\overline{}$	28-(1	6 2	evo	4	+	_		1	2		\neg	21		21		
	longest trains Maximum permitted		3 537	Н	4	2 842	8 619	- de	unction	615	3	enta - Su	0	\vdash		0/0	+	-	3 523	L	Ł		8 600	+	203	nction	3 506	Bogo	5 493		544	-	Н	387		3 744	3 457	240	3 693	_	732
Homo ha	Tracks for Tracks for		2 and 3	2 and 3		1 and 2	2 and 3	The second	nime jur		G A	205 Banatsko Milosevo - Senta - Subolica	2 and 3		2 and 3	3 and 4			2 and 3			Щ	2 and 3		C Puo L	Varoš - Open line junction 2a	2 and 3	- Odžaci - Bogojevo	4 and 5		2 and 3	2 and 3	1 and 2	2 and 3		2 and 3	2 and 3	1 and 2	2 and 3		3 and 4
Direction	Maximum permitted train length		537	740		842	619	0	- Cpe	2	100	7.40	268		523	0/0			523				600		203	5. Op	206	Novi Sad -	492		544	624	710	387		744	457	240	989		730
pəəds	Left frack	11	100	(0/)	Π			District	M 4+1	0.0	07	Sanats			0	i		0	30)				(08					207 Nov			0			-	2			v		00	
Maximum permitted	Right track	10	1	20 (9	5	ou and ou	ider (k	00	07	C07			09			50	20 (30)				(08) 09			Pančevo		2	P		09			,	3			59	5	100	
Λ.	Railway line categor	6	Ą	Ą	B	B	හ	8	Topk		D4		Ð	0	0	3 8	A	A	A A	4	A	Ą	4 4	Ą	¥ «	206	ž	40	13	D3	3 8	D3	D3	D32)	$D3^{2}$	D3	$D3^{2}$	$D3^{2}$	D32)	D3 ²)	D3
	Class of railway line	8	×	×	R	24	24	R	207		ø	ſ	×	M	M I	X P	24	R	N P	4 24	24	24	24 22	×	N C	4	þ	4	M	4	4 4	M	M	×	R	N	×	×	24	2	24
əuil	Single/double-track	7	S	S	ß	ςΩ	σ	20	1 (KM		A	ľ	v2	S	S	n w	σ	S	vo v	2 02	S	S	so so	S	22 0	2	ō	2	S	s c	2 52	S	S	S	S	S	S	cΩ	S	S	S
1	Type of service poin	9	11	1	3	1	-			_	9	e	00	т	-	io	6	12	1 2	9	3	3	n -	3	6	-		0	-	4 (0 -	1	10	1	3	1	H	10	н	m ·	-
	Name of service point	5	BANATSKO MILOŠEVO POLJE	BANATSKO MILOŠEVO	RIĆ	KIKINDA	BANATSKO VELIKO SELO	STATE BORDER	203 Beograd Donji Gr	TOPČIDER TERETINA	6+795 OPEN LINE JUNCTION G	BANATSKOMILOŠEVO	BOČAR	ESTER	PADEJ	OSTOJICEVO ČOKA	KM 35+187 SC	JUNCTION POINT 22 SENTA	SENTA HINCHON BOINT 33 SENTA	OPEN LINE TUNCTION SENTA (CANCELLED)	GORNJI BREG	BOGARAŠ	DOLINE	GABRIĆ	BIKOVO	рошся	0+275 PANČEVO VAROŠ	EN LINE SOLICITOR 28	WISAD	SALOVO	VEIERNIN	PETROVAC-GLOŽAN	BAČKI MAGLIĆ	GAIDOBRA	PARAGE	TKOVO	ODŽACI	ODŽACI KALVARDA	KARAVUKOVO	BOGOJEVO SELO	GOJEVO
	Сћајпаде	П	137+138	141+291	9 148+600 DE	160+114	11+099	14+423		5+700 TO		0+356 B A	5+105	10+700	18+063	31+176	35+187	38+407	0+000	40+759	42+293	49+210	54+223	62+071	64+592	20010/			000+0	3+595	12+554	25+111	29+542	36+092	44+224	50+447	59+003	61+240	65+448	3 72+471 BO	4 214 76+685 BOGOTEVO
	Distance in km	3	15.514	4.153	7.309	11.514	*10,398	3.324			1.095		4.749	5.595	7.363	5.946	4.011	3.220	*1,082	*1.595	1.534	6.917	3 825	4.023	2.521	14.03	1 264	1.75	3	3.595	3.454	12.557	4.431	6.550	8.132	6.223	8.556	2.237	4.208	7.023	A 27
public transport	Left track	2					15.11.1857.				188		15.09.	1890.	15.09.	1896.		1915.		I		14,11.	1889.	L		Ī	09.04.				-	14 00	Щ					1	24.12.	1908.	
handover to	Right track	1	1				(E)	E I	П	159	:61	ш	5	٠. ا	Y)	00	1	O				N	00				100	41				12	+ 00						A.	5	



Second Continue Co		Altifude	30	7.00	83.4 4	1,00		81,8	81,5	81	78.4	88,4	77,4	77,4	8,64	82,8	80,5	O O			Ť	000	80.9	Ĭ	101.0	81.5	81.8	80.0	79.2	79.1	78.5	70.1	1.6/		82.4	85.5	91.2	8.06	96.2	101.9	105.2	109.4	114.4	122.3	121.6	135.6	134.6
1 1 1 1 1 1 1 1 1 1		Loading gauge	56		1.5	1 3	S-I	I-S.	S-I	S-I	1.5	S-I	I-S.	I-S.	I-S:	I-S:	-S-I	10	Ħ	I-S	I-S	f	S-I		,	12	1.5.1	I-S	I-S:	I-S	S-I	S-I	1 5	I-S	S-I	I-S	I-S;	S-I	I-S	I-S.	S-I	I-S	S-I	S-I	S-1	1 2	S-I
1	the line [daV]		ы	PE	+	+	Ž		+	+	-	+	Ž	Z	-	+	+	-	-	73	_	3	Ņ	1			+	7	Ž	2	7	NPC	180	182	2	Z	2 2	Z	7	2	- Ž	Ž	Н	+		+	2
Part Part		\rightarrow	-	1	+	+	Ħ	4	7	+	+	+			+	Ħ	+	-	Н	H	4	3	'n			+	+	t			7	t	t	t	S	F	2		7	H	3		Н	+	-	+	v
Column C	1777.61	Slope	_		_	_	Ħ	S	4	4	4	3	g		-	7.		_	H			3	_	1	- 3	0 0	4 -			Ħ	7	Ť		t	0		-		-	-	0	П		17	100	_	2
1		ncline	_	li	v	2	Ħ	3	7	77	7	S			10	3	4	0	П	П		H	_	100		ى د	4 -			Ħ	7				3	Ħ	2		-		3		П	4	c	4	4
1	[0%] 110	Oradient of the static	24	0.5	2.0	2		1.0	0.0	0.0	1.0	0.0	0.0	3.0	0.0	4.0	0.0	0.0	Ī			0	0.0	1	0.0	0.0	0.0	0.0			0.0				0.0				1.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	sn	Minimum curve radi	23		450	2		1000	1000	1000	300	450	700	950	400	400	400	200	Ī							300	200	200	400	009	300		300			700	009		700	700		700	700	700	2500	2007	700
Column C	oqsnarT Tdgiərî	Open for passenger /	22		P/F	7/1		P/F		P/F	4 0	P/F	Ъ	P	Д	Ъ	e	4	H	F					P/F	4	P/F	Б			P/F			Б	P/F	P	P/F	P	P/F	P	P/F	Ь	Ъ	P/F	A 0	F/F	P/F
200 17.5 1	e point	Occupancy of servic	21	6	ηр	1	Ш	D	Þ	Þ		Д			ď	þ	ع د	4			Ь	5	2		P	2	Д								Ъ		D		Þ		P	Ш		Ы	þ	9	д
1975 1975	molts	Side-/end-loading pl	20		V.	2		S		τ 2 2		ØΣ			ď	ĊΩ (2	1	L	Ш		ō	Ω	k	\$2	20	0 00	S			SÆ			L						L		Ц		ζ2			Ś
		Freight car scales	119		1						Į.			Ц	1		1	1	Yes						Ц	1	L				1												Ц	1	1		L
1-12 1-12	nic.	Service point code -	18	10000	23301	10007		22311	22310	22309	22307	22306	22305	22304	22303	22302	22301	22203	16871		23301	10000	77301		16550	16601	16603	16604			16350			16300	16301	16302	16303	16304	16305	16306	16307	16308	16309	16310	16311	16313	16314
1.50 1.50	he service point	Manner of securing t	17	Ŀ	1 6	10		00	10	œ		4			S	s,	10	3	4		1	,	10		1	2 01	3		1	1	cı	ŀ	+		80		4		œ		4		П	4	_	1	4
Name of Secretary 1965 1	noitslu	Manner of traffic reg	16	vat stajalište	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance		station distance	block post distance		station distance	Zvornik Novi)		station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance
Chainege Chainege			15	i - Orlo	and 3	Call	Ħ	and 3	and 3	and 3	ŀ	and 3			and 3	and 3	and 3			П		evo)	and 3		9 pur	ana 3	and 3				1		t	b-	and 2		and 3		and 3	l	and 3	Ä		and 3	2 Pun	c pin	and 4
Chainege Chainege			5	šančev			H				÷				7	21	+	1 0	_	H	H	Lukić	7	state bo	80 0	1	_			H	+	ł	+	F	+	t	t			_	2	Н	\neg		-	_	
Chainege Chainege		Maximum permitted	14	imski	+	+		59.	-	_	ļ	-			8	78	55	Sailor				1 la -	ő	ina - s	-	8	62				4	1			61.	L	49		54		.19			82	57	'n	_
Chainege Chainege		acceptance of the	13	lovo - R	2. and 3	Comp 7		2 and 3	2 and 3	2 and 3		2 and 3			2 and 3	2 and 3	2 and 3	VARD.				junction	2 and 3	onja Bor	5 and 6	2 and 3	2 and 3				2 and 3				1 and 2		2 and 3		2 and 3		2 and 3			2 and 3	5 and 3	Chill 7	3 and 4
Chainege Chainege			12	tion Saj	855	200		593	7	-		573			804	787	555	ENI I				pen line	ccc	ction D	639	/09	628				467	Ĭ		Ì	614		497		542		614			853	1773	1/2	_
Chainege Chainege	The state of the s	Left track	11	me june		İ			(08			ī		ī	(08			PCHA		0	1	ovat - C	0	line jur		Ī	(08						i	13	(08								(08	Ī			
Chainege Chainege		Right track	10	Open li	4				09						09		36	d MA		ī		0 Orl	3(Open			70 (ñ		1	70								09				
Colored Color Colored Color Colored Colo	K	Railway line categor			3	3 8		A	A	V.	4	A	Ą	A	A	A.	¥ <			ខ		7	Ą	apac -		20 20	3 2	D3	D3	D3	D3	A C	3 6	D3	D3	A	Ą	A	A	A	A	D3	D3	A.	A A	4	03
Color Colo		Class of railway line			2	4 2		Z	M	24	4 2	1 24	N	K	M	24	× 6	4 00		R	R		24	Ja - S	4	40	4 02	2	R	24	2	24 6	4 12	2	×	R	×	N	×	R	R	N	24	2	X o	4 0	4 04
Color Colo	ıne	Single/double-track	7	80	v.	2 07	Ħ	S	22	S	2 0	2 52	20	52	ZZ.	τΩ T	02 0		-	S	_	3	W	Run		20	2 00	20	22	22	2	2 0	2 0	102	S	S	S	20	52	52	S	S	ις.	20 1	20 0	2 0	2 00
Bank Bank		Construence description	H	7	- 1-	1 4	Н	1	0		2 6	-	3	3		_		4	-			-	-100	2111		+	0 -	2	9	9	1		0 0	3	2	3	_	3		3	1	3	8		2 -	1 8	1-
B B B B B B B B B B		aioa aoirass 30 cant		15					1		- 1			2.4							*									*											120	2.2					
2.2004 2.2004 2.2004 2.2004 2.773 2.774 2.773 2.773 2.773 2.773 2.773 2.773 2.773 2.773 2.774		Name of service point	, 5	0420 H 2 2/20	48 RMSKT ŠANČEVI	OR OPEN LINE HTNCTHON I			118 BUDISAVA			32 TITEL	DONJI				881 ORLOVAT	SO ONLOVAL STOR	41 NOVI SAD MARSHALLING YARD	95 NOVI SAD LOKOTERETNA	85 SALOVO	HATTO THE	45 OPEN LINE JUNCTION ORLOVAT		117 RUMA	344 BUBANOVCI			773 OPEN LINE JUNCTION 1	7	5					000 DUBLjE MAČVANSKO	131 PETLOVAČA	100 RIBARI	13 PRNJAVOR MAČVANSKI			100 JADARSKA STRAŽA	100 LIPNICA				SAIRASINA
		Chainage	4	201.0				Щ,	d.		14			1.1	i,			J.	1+1		3	201.40	- 12							ļ.,						£.					4		K)	6)	i, ji		
19.5 0.5 0.5 0.5 0.5 0.5 0.5 0.5 0.5 0.5 0		Distance in km	60		5 24	80 6*	1.14	4.81	4.64	7.00	5 45	5.58	1.70	2.71.	4.33	7.34	9.85	0.0		0.45	*2,04		0.63			10.82	4 66	7.55	2.47.	0.57	0.76	86.0	0.68	2.60	3.72	6.57	7.73	3.76	2.91	4.58	1.70	3.90	6.50	5.99	2.00	5 51.	3.65
19.50 19.00 19.50		Left track	7		. 4		ŀ			Ī	7.	6	7.	7.	3	0 .	ć	1	Ī			5	1935.			. ·	1.	T		9	4.	Ī	Ī					•		0.0	÷		_		T		
		Right track			196	1	0.00	188	1		02.0	188	15.0	192	B	15.0	192						.60			05.1	190			03.0	193									15.0	150						



	Altitude	30	136.9	137.7		79.3	Į				1.43	144		147.4	20,0	133.4	167.5		169.5	174.8		186.8			195.2	200	404.4	198		212.4	330	7.077	228.4		237.3		250.3	291.6	298.2	47.00			
	Loading gauge	29	ŢS-I	ŽS-I	7.2-1		1-S7	-	ZS-I	ŽS-I	1.07	ŽS-I	ŽS-I	ŢS-I	ZS-I	1.5	ŽS-I	ŽS-I	I-SZ	ZS-I	1.05	78-1	ŽS-I	I-SZ	ŽS-I	1.07	ZS-I	ŽS-I	I-SZ	ZS-I	1.07	70.1	ŽS-I	Ţs-I	ŢS-I	I-SZ	ZS-I	ZS-I	78-1	ZS-I	ŽS-I	ŽS-I	You T
the line [daV]	←	28		-	0		•	Ė	Ĺ		Ç	-		7		+	7	-	-	W)	t	9	-		ব	t	,	6	-	9	-	٥	4	+	S	\dashv	-	6	ur.	-	Ē		4
Ruling resistance of	\rightarrow	27		'n			•	Ī			ç	+		7		n	7		'n	n	Ī	9			ব	۲	I	3	H	9	¢	۰	4		S		1	6	v.	1	Ī		v
Ruling tradient	Slope	100		-	4	_	0				Y	-		4	-	1	2			3	1	v	-		4	7	7	7	Z,	64	۶	٦	4	+	4		-	7	-	1	E		ŀ
	Indine			4	2	H	0	H	H		3.4	0 2		4.4 6		0.0	0.8		6.2 5	5.3 4	+	9 22	_		75 4	4	-	0 3	_	7	1	0,4	6.6		17 5	_		3.9 8	3.3 4		H	H	ľ
[0%] uc	Gradient of the static	24	0	0 0	5	Ц	5	Ļ	L	Н	-								2	2	+	0 455	-		0 0.75			0	4	0	1	1			0 6.17	4	5	n +	+	+	÷	L	ļ
sn	Minimum curve radi	23	70	700	30		300				000	250		250	000	9/	200		200	20		200			200	300	2	300		009	9	000	006		500								L
freighF Fransp	Open for passenger /	22	Д	P				P/F	Ъ	Ъ	F 4	P/F	Ā	.ď	<u> </u>	4 4	А	Ъ	J/J	A 6	4 0	4	Ъ	Ъ	A 6	A 4	17.5	P/F	Д	P4 6	4 6	4 р	, a	ь	P/F	Ы	P/F	<u>a</u> , p	P/F	Ь	ц		þ
	Occupancy of servic			Ā		Ц		Δ,	-		11	2		n	44	-	n	-		D	1	12	-	_	U	0	_	Ţ	- 1	Þ	+	1	11	+	Ъ	-	-	Ū	Δ.	-	E		ľ
ппода	Side-/end-loading pl	-		_		4		S	2	-	V	2 02	L	ςΣ	Ş	2	202	L	Ω	Ω	+	V.		-	ď	2/2	Ž	Ø		Ω	Ç	2	V.	-	Yes S	4	υ	+	O.	2	-	L	1
	Freight car scales		5		0	-	+	2	6		7 6	1 4	80	5	9		00	6	0	1 0	7 4	2 60	7	4	50	0 -	+	Į.	7	0 3	7 4	2 4	9	2	Н	0	2	00 6	20		1 -		•
nıc	Service point code -	18	1631		16319			13352	12219	12201	13303	12204	12218	12205	12206	12220	12208	12209	12210	12211	127	12213	12217	12214	12215	13751	134.	13001	13002	13003	13006	13017	13006	13012	13060	13010	13007	13008	13009	13015	13011		40.00
the service poi	Manner of securing I	17		3		Ħ	#	٠	t	I	¢	4		2	,	1	17		2	7	1	6			2	5	,	3		3	ç	1	2	Ī	3		е,	6	6	+	Ī	F	t
noitsla	Manner of traffic reg	16	station distance	station distance	Station distance	(minc)	station distance		station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	4 4 5 6 4
B→A	sceeptance of the	1.5		Ī	office 3	Ciloni	ľ	ŕ	ĺ	Ť	c	1 4		2	,	2	8		3	0	t	3		1	ń	5	,	3	Í	6	,	1	2 and 3		2		ю,	2	6	,			t
Direction	Tracks for		Г	T	-		-	- Sag	Ħ	Ħ	413	714		586		C70	602	Ħ	663	08	t	647		1	259	738	9	605		909	9	coo	602 2	1	222	Ŧ	615	627	819	+	Ħ	П	t
	longest trains Maximum permitted			+	- Comm		- 2	0 - 702	H	H	-	7	H	5	- (o	9		9	9	+	V.	H	-	9	Ė	1	9		0	-	1	+	+	òo	4	9	9	VO.	+			ł
Direction A←A	Tracks for acceptance of the	13			- Luciyo	1 1000	Transferen	Statac - Maijevo - Pozega			¢	1 4	L	2	•	2	3		3	33	1	6			3	*	,	3		3	¢		2 and 3		2		8	7.	3	1			ļ
	Maximum permitted Irain length	12			ani ou	m lam	20100	582			710	714		286	202	070	602		693	089		647			657	738	95/	605		909	302	cno	602		877		615	627	618	2			
permitted speed	Гец цяск			5	(2) 50 (Dotti Servi) - Onen line impelien 1 - Onen line impelien 3	50	2	513		30 (50)										25 (40)							l				80								100	747			
mumizsM	Right track				- Xorro	(na)		ė				1				í	Ĺ			<u>ظ</u>		1	1 1	- 1		1			-1		-	1	1	1			ı f			1	1		_
λ	Railway line categor	6	D3	A (3	TI I	103		£	8	3 8	8	B2	B2	B2	E2 CH	B2	B2	BZ	B2	E2 CE	E 22	B2	B2	B2	79	7 7	D4	D4	D 2	7 5	2 5	7	D4	D4	D4	D A	Ž Č	D 0	D P	7 7	\vdash	٠
-	Class of railway line			+	71.5	4	×	k	K	+	4 6	+	-	R	4	+	-	10		24 12	4	1	-	4	-	Y P	-	\vdash	-	-	+	4 0	+	-	R	_	-	-	4 4	-	400		1
	Single/double-track		ďΩ		2		20	Ł	Ś		N V	2 02	\vdash	ζΩ	-	2 0	-		Ω	-	+	+	Н	-	so t	+	-	-	-	ω τ	-	+	+	-	S	\dashv	τ Ω τ	-	+		2 02	-	4
1	Type of service poin	9	ε.	9	2	9	9	1	3	£ (5 -		3	I	3	3 1	1	.3	1	1 0	0 6	2 -	.3	6	-1 (2	12	1	3	1 0	5 11	7	-	3	1	3	1	64 6	v -	3	0 60	12	ľ
	Name of service point		00 DONJA BORINA	68+685 OPEN LINE JUNCTION DONJA BORINA	JUSTATE BORDER	0+000 OPEN LINE JUNCTION 1	0+6/5 OPEN LINE JUNCTION 3	0+374 STALAC	00 GRAD STALAĆ	MRZENICA	8+9/UMAK RESAINE					I STOPANJA DONIA POČEKOVINA	_	49 TRSTENIČKI ODŽACI		00 VRNJAČKA BANJA		1 PODINAVCI	38 VRANEŠI	25 VRBA		JI KP ALIENO			28 MRSAC			DO ENTRACE	33 ZABLAĆE		_		PRIJEVOR	94 OVCAR BANJA	JU JELEN DO 56 DRAGAČEVO				
	Chainage	4	008+29	89+89	0+80	0+00	0+67.	0+37	1+400	3+887	11+073	14+559	19+400	21+384	25+308	33+700	35+547	38+949	42+455	49+200	55+638	57+651	59+938	62+225	65+88	71+621	72+538	78+637	81+528	84+441	010+88	007+76	96+303	000+66	105+541	110+200	112+994	120+494	128+366	129+900	133+700	136+034	
	Distance in km	3	2.446	0.885	1008.0		0.675		1.026	2.487	2.083	2.636	4.841	1.984	3.924	4.683	1.847	3.402	3.506	6.745	2.400	2.013	2.287	2.287	3.656	3.027	0.917	660.9	2.891	2.913	4.109	2.240	1.803	2.697	6.541			7.500	1.166	37			J.
public transport	Left track	2	5.	4	09.03.1978	H				. S.						1			2.	è.	1			_				34				1	<u> </u>		L	ل ني	1			28.11.		L	L
o : Mira		\vdash	15.05.	1950.	×.					15.05.	3		1						01.12	1958.							1			3	1055	1				28.11.	1976.			17	1976.		



əbirlilA	30					Ì	70,9		85.1		6	93.0				83.0	K		Î	76.2		123,1	2 4 4 5	1202		105,3			127.0	0.00	154.1	1,401			210.0		2 090
Posqing gange	53	Ī	žs-i	ı	ŽS-I	Ť	ŽS-I	ŽS-I	ŽS-I	ŽS-I	ŽS-I	1-07	Ħ		i	f	ŽS-I	ŽS-I	ZS-I	I-SZ	I-SZ	ŢS-I	ZS-I	78.1	ŽS-I	ŽS-I	ŽS-I	ZS-I	ZS-I	1-87	1.0%	78.1	ZS-1	I-S	ŽS-I	ZS-1	70.1
resistance of the line [daN]	28				I	į	I	100	8	-		4				F	44	7		01	24	7			1	10	Z		74	,	7 -	1	7		ı	-	1
Slope grading Ruling	26 27	H	H	H	H	H	+	+	7 14	H		4	Н	H	+	÷	1	1 9	0	+	H	2 10		10 21		10 2	Н		2 9	+	7 1	1	8	+	1 9	+	0
Incline Ruling Stories Stories		H		H	Ħ	ř	t		17	H	-	0	H		Ŧ	H	14	-		0		10	_	2 1	-	2		Ħ	œ	-	21 %	,	8	-	~	Ŧ	r
Gradient of the station [%]	T.					Ĺ	0.0					0.7]	0.7		2.6		0.0		0.0		0.0	0.0	8.5			0.0	-	Z C X	0.0	1.5		0.0	1	C
Minimum curve radius	23						185		250		0.5	430						350		300		800				400			450	000	300	200			300		200
Open for passenger /freighF Fransp	22						P/F	٥	P/F		Р	T/A				P/F	Ъ	P/F	Б	Ъ	P	P/F	Ъ	D F	Ь	P/F	Ь	Ъ	Ъ	A L	P/F	d d	P	Р	P/F	Ъ	P
Occupancy of service point	21			Ī			Ъ	n	Д			7.	n		1	Д		д		Þ		Ω	1) ;	Þ	Ь			Þ	F	7 12		I		n	1	P
Side-/end-loading platform	_		L,		Ц	L					3	2	Ц			Ś														Ç	2				Ω	1	ō
Freight car scales	119	5_	L	_	Ц	Ļ	L	Ц		L	Ц	4	Н	4		L							4	+	Ļ					+		L	Į.		Ш	4	4
Service point code - UIC				ଚ			13670	13607	13603		13604	10001				13551	14551	14550	14606	14503	14504	14505	14506	14508	14509	14510	14511	14522	14512	14513	14514	71257	14523	14518	14519	14520	14521
Manner of securing the service poin	17			agačev 1	E	Į	3		-	н	H	7				1		ъ	V	0 00		80	ŧ	4	10	8			4 ,	3 €	, ,		10	I	H	ç	2 -
Manner of traffic regulation	16 17 18 No 73 - (Adram) I NE CT OSED	station distance	station distance	of the station Pozega: (Uzići) - junction point No 53 - junction point No 54 - (Dragačevo)		Krsna	station distance	station distance	station distance	station distance	station distance	station distance			(00	(Sp	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance
acceptance of the longest trains				junction		- Mala	3	Ħ	3		,	1mka	I		(Alexander)	4		2		1		2	·	7 6		3			2	,	7 0	4			3	Ť	2 and 4
Tracks for B→A Tracks for B→A	[4 imperio			No 53		Kadina	458	ñ	743		6	nederevo	\exists		73. (7	633		543				540	2.2	676		604			520	2	030	3	Ħ	Ħ	295	Ť	601 3
longest trains Maximum permitted	10.72	7	H	n point	H	- gaza	4		7	H	H	a - Sme	\exists		one line implies 22	9	H	S	+	1		5	,	0 6		9			S	+	0	-	H	H	5	+	+
Tracks for A→B acceptance of the	Š			unction		CHOIL J.	3		3			Jezav			líne in	4		7				7	c	4 6		3			7	*	7 6	4			3		2 and 4
Maximum permitted train length	12			zići) - j		me junc	458		711		700	iunction			- one	629	Ĭ	543				540	600	676		604			520	200	200	200			295		601
Deff track speed	111	-	ı	Požega: (T	50	216 Smederevo - Open line junction Jezava - Kadinac - Maia Krsna		50			30	7 Open line iunction Jezava - Smederevo luka		ŀ	Trems - Box		40						100,00	(00) 00									Š	50			
Right track Maximum	9 10	aluska	Ð	tation	D4	lederev	D4	D4	2 2	33	Ð 8	+2	-	D4	112 Mala Verna	-	D4	7	B2	77 A	D3	D3	-	3 6	D3	D3	D3	D3	D3	¥ 4	K 4	-	K A		A.	∢ <	∢ <
Class of railway line	8	- 181	R	the s	R	ns ol	R	RI	1	R	-	4			R L	1	R	R	2 C	+	+	H	_	4 2	1	RI	RI	R		+	4 0	4 02		+	H	-	× 6
Single/double-track line	1	9	_	3,4	S	7	S	02 0	┿	-	+	-	-	S	-	H	-	-	-	2 02	Н	H	+	2 0	-		Н	20	4	20	4	2 0	+	-	Н	+	ממ
Type of service point	9 00	12	23	cting to	_	-	T	9		12	+	4	-	9		-	3	H	6 6	+	3	-	- 1	7 6	1	1	3	3	+	+	-	+	+		\vdash	-	n -
	to of the state	A OI IIIC SIAII(9	215 Connecting track		-				E																7										E I	
Name of service point	5 6 7	UNCTION POINT 72 KRALJEVO	0+000 JUNCTION POINT 73 KRALJEVO	04000 IIINCTION POINT 54 POŽEGA	0+752 JUNCTION POINT 53 POŽEGA	0+820 BEGINNING OF THE I INF	-0+057 SMEDEREVO	OPEN LINE JUNCTION JEZAVA	RADINAC	JUNCTION POINT 64 RADINAC	VRANOVO	10+8/2 MALA KKSNA	0+000 OPEN LINE JUNCTION JEZAVA	OPEN LINE JUNCTION JUGOPETROL	4+011 SMEDEREVO LUKA	71+272 MALA KRSNA	Ljubičevski most	POŽAREVAC	JUGOVICEVO SOBOT BOŽ ABESTAČET	BUBUŠINAC/BRATINAC	BARE/KASIDOL	TG	MAJILOVAC	LITBINIE	ČEŠLJEVA BARA	RABROVO/KLENJE	MUSTAPIĆ	MIŠLJENOVAC	ZVIŽD	KUCEVSKA LUKDA	KAUNA	NERFENICA	NERESNICA NERESNICA	VOLUJA	BRODICA	BOSILJKOVAC	170+740 BLAGOJEV KAMEN
		0+444 100	000 JU	ли ооо	752 JU	870 BE	057 SIV	1+749 OP	6+711 RA	-	9+466 VR	W 7/9	10 000	2+484 OP	011 SIV	272 M	200 Lit									-		_								-800 BC	740 B1
Chainage	4	+0	l.	ŧ		4		244								71+		-	89+100		Γ			116+414		126+038				140+650				11.1			
Distance in km	3		*0,444		0.752		0.813	*1,832	3.461	2.413	0.342	1.400	E	2.484	1.527		10.928	5.563	1.337	5.542	5.168	1.927	3.623	7.350	5.858	3.766	5.762	2.100	2.167	4.383	3.896	5 034	2.876	3.208	3.882	3.218	3.940
public Left track transport	2				25.09. 2001.	İ		11.01	1888.			1		-1		-	1020	;			L		- Ji	-	1939.					1	1	İ	.S.	1950.	1	.60	1958.



	Altifude		.I 116,1	1		4 115	1		.1 84,4	9.99 I.	-	-	F 56,9			4			1. 55,4	1	-		ŀ	ļ	1 353.3	e			194		I		.I 212,3	,		1	1	1 241	4	1 255	-1 248.8	+
the line [daN]	Loading gauge		- 4	\$Z	Н		ZS-I	4	7.5	-	ŽS-1	ŽS-I	Н	ŽS-I	ZS-I	+	-	ZS-I	-	78-1	3	\vdash	ZS-I	Ļ	ŽS-I	ŽS-1	L	ZS-I	L	ZS-I	ŽS-1	ŽS-I	+	72.1	ŽS-I	ŽŠ	ŽS-1	\vdash	ŽS-1	ZS-I	ZS-I	-67
Tesistance of		7 28			-	10 12	+	+	6 7	9	F	H	4	2	+	Ŧ.	+	O +	0 -	9			S	F		=	-	3 12	-	H	H	+	80	+	╁	H	H	8	+	+	6	
Ruling	Slope	26 27	-	H	-	10 1	t	+	0	4	+	H	3	0	+	1	+	8 -	-	/	1		3	H	0 9	-	+	10	H	-	0	0	+	0 0) H	l v	0	\vdash	0 0	0 0	0	+
Ruling gradient	Indine	-	-	H	-	10 1	ł		_	0	-	H	0	7	1	-	- 1	+	0 -	+	1	-	0	H	.00	-	÷	2 1	F	00		-	+	v) =	+	+	+		+	9 1	9	+
[0%] u	Gradient of the static		0	П		3.0	Ť		0.1	0.0		Ħ	1.0	0.0	t	Ť	0	- L	3.0	Ť	1	T		ŀ	П	7	T	П	0.71	7	Ħ	-	5.8	Ť	f	t	Ħ	9.1		0.0	0.9	
	Мітітит сигуе гаді	4	20			250	+		007	250		H	250	h.,				250	067	720	ł	4		F	H	Ħ	-	_	-	325	009	300	009	300	450	300	1000				350	ncc
30 0 000					Н	<u> </u>	+				H	H			+	+	+			+		-1	-	ŀ	Н	-			Ł			**	1	H	+	t	7		-			
densit Fransp	Open for passenger /	7.7	P/F			Д	4	D 6	4 0	P/F	ď	ď	ď	Д	Д	1	4 5	P/F	P/F	I/I				Ш			L		0	- 4	ď	đ	4	<u>0</u> , p	4 64	4	Δ.	P/F	A 2	P/F	P/F	LI
	Occupancy of service		Ъ			Ъ		1	2	ρ				Þ			1	<u>م</u> ا	4 6	4				F	a D		D	-	ρ	1			D		1			H	_;	Þ	Þ	2
шоде	lq gnibsol-bnə\-əbi2	-	S	Ш	Ш	4	1	1		S	L	Ĺ	ĊΩ	Ø	1	1	S C	os o	n o	2		Ц		L	Ω	4	ζ.	Ш	V	2			VΩ	Ш		L		¢2		S	S	2
	Freight car scales	19	5	Н			1					3-1			-			1						Ŀ		4										L	Ļ		Н	4	1	-
om	Service point code -	18	14301			14101	14102	14103	14104	14106	14107	14108	14109	14110	14111	14112	14113	14114	141115	141/0					11113	1	111113		11001	11101	11121	11102	11103	11129	11119	11105	11124	11106	11130	11107	11109	TTTOS
ne service poin	Manner of securing t	17	8	-	H	+	× 1	+	×	8			80	œ	1	-		+	-	2	1	9	9	V	9		9	-		+			œ	Ì	İ	İ	Ī	4	_	10	8	0
noñslu	Manner of traffic reg	16	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	(Tmavac)		station distance		station distance			station distance		station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	Station tustance
	acceptance of the longest trains	15	2 and 3			2 and 3		1	1 and 7	2 and 3		H	1 and 2	2 and 3	1		2 and 3	and 3	c pung 7	7 pur 1	1/8			mlija	2	Ť	2	П		T			and 2	t	t	t	Ħ	3		2 and 3	2 and 3	IId 2
Direction B→A	Ltscks tor trsin length	2		H	\vdash	-	+		-			H			+	_	7 0	210	-	+	umctio		-	Kuršu	Н	4	L				H	\dashv	7	÷	-	H	H	Н	\neg	_	_	7
	Maximum permitted	14	819	Ц	\vdash	549	4	+	304	721	-	Ц	511			+	-	+	+	675	n line			n.,1".	618	- tolkoot	618		00000	3	L	-	564		L	L	L	199	\rightarrow	585	480	÷
A←A	Tracks for acceptance of the longest trains	13	2 and 3			2 and 3		1 44 13 75	1 and 2	2 and 3			1 and 2	2 and 3		1	2 and 3	2 and 3	t and 7	1 and 2	Open line junction "3" - Open line junction "1"			- open line junction "1" - Kuršumlija	2	4	618 2 6		223 Doljevac - Kastrat - Kosovo Polje				1 and 2			l		3	44	2 and 3	2 and 3	comp 7
Direction	Maximum permitted frain length	12	819		Н	549	Ť	+	364	721	+	Ħ		547	İ	-		+	-	674	ction3			oen line	819	- Xancy	618		Ac-Ka	2			564	T		t	Ħ	199	+	585	480	÷
pəəds	Left frack	11			-	-4	-1	-1		4								4 2			ine iun	۲			ļ rāl	122	777		Dolpev —		100				1	1				Ť	MAX.	9
Maximum permitted	Asight track	10									4	40									Open 1	40		221 (Barlovo)	t	1		1	573					20	9							
Ā	Railway line categor	6	ខ	ខ	8	8	0	8	3 8	8	8	8	ខ	Ð	ខ	8	8	3 3	3 8	3 8	offina) -		ខ	221	A	A		A	1	BI	B1	B1	BI	B1	BI	BI	BI	BI	A.	4 <	4	C
- 11	Class of railway line	8	R	K	K	R	W G	2	× 0	4 24	R	R	R	×	W.	2	4	24 6	4 6	4 2	o	N	M		K	×		×		R	R	M	× i	M D	4 64	2	R	R	N F	24 6	4 4	4
əui	Single/double-track	7	S	Ś	20	co i	S C	S C	20	2 02	02	S	S	co.	\$2	\$ 1	02 0	S S	ם מ	n v	220	119	ďΩ		3/2			ςΩ.		02	ď	ζ.	V2	v v	2 02	202	S S	5/2	so s	02 0	2 02	2
4	Type of service poin	9	1	9	9	-	m	6	4 6	1	3	3	10	ī	3	3	Ω,		4 .	-		9	9	ķ	, n		-	9	4	1 60	3	ю	Ξ,	m	, 60	8	m	-	m :	∞ r	<u>-</u>	7
	Name of service point	Ş	C	JUNCTION 2	INCTION 1			ا ندا	KA BEKA			CA							ICTANIËTE	ISLANDIE		INCTION 3	INCITION 1	INCTION 1	THOTTON			OPEN LINE JUNCTION KASTRAT			DNJEVAC			ENTAR			2		GANJA	ALA PLANA		
	Chainage		118+834 VRAŽOGRNAC	121+000 OPEN LINE JU	OPEN LINE				136+196 1ABAROVAC 138+764 TABAROVAČKA BEKA				153+466 RAJAC						1844578 PRAHOVO	1844578 FRAHOVO PRISTANISTE 1844070 FND OF TINE	-	0+000 OPEN LINE JUNCTION 3	0+439 OPEN LINE JU	S3+334 OBENITME HMCTTON	55+894 KURŠUMLIJA	56+363 END OF LINE	0+000 KURŠUMLIJA	2+320 OPEN LINE JU	0+947 DOLIFVAC	3+300 ŠAINOVAC				11+000 ZITORAĐA CENTAR	_		_			31+734 TOPLICKA MALA PLANA		3/ +644 BELOLIIN
	Distance in km	3	7.228	2.166	0.900	2.731	3.902	*2,871	7.568	6.892	2.804	2.870	2.136	3.362	3.364	3.416	4.242	6.278	1 562	0.501	7000		0.439	ı	2.560	0.469		2.320	1	3.053	1.500	1.797	3.499	1.700	2.000	1.525	2.575	3.527	2.687	6.720	3.344	2,344
				Ш		-	_ [*	er.		1		1						1			1						L						-		1						1	
public transport	Гец цяск	2							1014	0.11												-		F					1				28.02.	1925.					04.12.	1929.		04 12



	Altifude	30	116,1		31.	3		84,4	9,99		9,46	56.7		3	39,1	55,4						353.3				194			212,3				241		255	248.8	
	Loading gauge	59	ŢS-I	I-S:	ZS-I	ŽS-I	ŽS-I	ZS-1	ŽS-I	ŽS-I	ZS-I	ŽS-I	ŽS-I	ŽS-I	78-1	ŽS-I	ŽS-I	ŽS-I	Ē	ŢS-Ţ		ŽS-I	ZS-I	ŽS-I	l	1.57	ŽS-I	ZS-I	ZS-I	ZS-I	ŻS-I	ŽS-I	1-87 ŽS-I	S-I	ŽS-I	I-SZ	ŽS-I
The line [daW]	←	28	8	1	2 0	100	Н	6	9	AX.	4		AN	-	4 0		18 2	-	F	20	ŀ	1	-	12		1	1 200	100	8	VIV	AN	17/1	3	-		,	AN
Ruling resistance of	\rightarrow	27 2	6	1	01	-	H	2		H	7	7	H	Η,	- ×	+	1	T	Ħ	(4)	ŀ	6	1	100	1	t	Ħ	H	80		H	Ť	00	+		6	
हाउदा लग	Slope		œ		01			œ	4		cr	0	П		4 00	,	17		E	n	Ī	0		10	H	6	0	0	0	0	-	v) t	0	0	0	0 0	0
gniluA	Incline	25	8		01	07	H	-	0		c			ı,	- 1	S	1			0		80		- 79		C	2 10	0	9	0 4	8	v) c	0 00	6	9	9	100
[0%] uc	Gradient of the statio	24	2.0		3.0	2.0		1.0	0.0		1.0	0.0			0.0	5.0	1									0.71			5.8		-		9.1	1 1	0.0	6.0	
sn	Minimum curve radi	23	250	Ī	350	007		250	250		0.50	250	5		250	250	250		Ī							305	009	300	009	300	450	300	300	300	1000	350	0
sns14 Hagistî	Open for passenger	22	P/F		٥	4 4	Ъ	<u>ы</u> п	P/F	Ъ	el e	4	Ъ		P/F	P/F	P/F									۵, ۵	4	À	Д	ъ.	P	д г	P/F	Ъ	P/F	P/F	Ъ
anioq ə	Occupancy of servic	21	Ъ		D	4		Þ	Ъ		ij	D			р	ъ	Ъ	Ξ	E		E	n		n n		Ы			p				H		n	Ω	
molts	Side-/end-loading pl	20	V2						02		V	2 02			20	02	ď	1				Ø		σ 2	П	S			σ				ζ(2		ď	ζ.	
	Freight car scales	19													Į				Œ																		17
nıc.	Service point code -	18	14301		14101	14102	14103	14104	14106	14107	14108	14110	14111	14112	14113	14115	14170					11113		11113		11001	11121	11102	11103	11104	11119	11105	11106	11130	11107	11108	11128
he service po	Manner of securing l	17	89	=	-	8	∞	œ	8		×	· ∞	7		xo v	· &	3		9	9	×	9		9		-	I		œ				Ą		10	œ	1
ពលជិនស្រុ	Manner of traffic reg	16	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	- (Tmavac)	station distance		station distance		station distance		station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance
	acceptance of the	5	2 and 3	1	2 and 3	CPII		1 and 2	2 and 3	i	1 and 2	2 and 3			2 and 3	2 and 3	1 and 2		- 1"0	П	mlija	2		2		6	t		1 and 2	t	H	T	3		2 and 3	2 and 3	
Direction B→A	Tracks for	1	2 a	4	0,0	4	Ц	1.2	2 a		-	2 3			2 2	2 3	1.a	_	lonou_		Çurğu	\sqcup	4				Ļ	Ц	1.8						-	2 a	
	Maximum permitted train length	14	819		5.40	743	Ц	364	721		115	547			583	613	429		ne in		1.	618	†a†	618	Sovo F	001			564		ľ		661		585	480	
a←A	Tracks for acceptance of the longest trains	13	2 and 3		2 and 3	china		and 2	2 and 3		sud?	2 and 3	ĺ		2 and 3	2 and 3	1 and 2		Open ime Junction "3" - Open ime Junction "1"		open line junction "1" - Kuršumlija	2	Kuršunlija - Kastral	2	Doljevac - Kastrat - Kosovo Polje	4	Ì		1 and 2				2		2 and 3	2 and 3	
Direction	Maximum permitted train length	12	819		\$ 40	+		364	721		111	1	H	+	675				c, non		pen line	819	Kıırğım	618	ac - Kas	009	ľ		564	İ		Ť	199		585	480	
pəəds	Left track	11	H	-1		1			-			1			1				ne Jun			11	222		Doljev		-				L.				i		<u> </u>
Maximum permitted	Asst track									40									nedo-	40	(Barlovo)	, i		9.	223					20							9 1
λ	Railway line categor	6	Ð	B	3 3	3 8	ß	8 8	9	ß	9 8	8	Ð	Ð	3 8	8	ខ	ΰ.	(Kgonna)	\mathfrak{S}	221	A	Ą	Ą		Ē	B	B1	B1	BI	BI	B1	BI	A	Ą.	K K	A
	Class of railway line	8	¥	K	24 0	4 4	×	K K	4 24	K	24 24	4 24	×	24	4 0	W Y	ĸ	24	(Kg	24	I	×	24	24	П	þ	4 24	24	24	×	M	24	4 4	K	W I	4 4	24
nne	Single/double-track	7	S	S	s s	2 02	22	so so	2 02	ςΩ.	oz o	2 02	S	so a	n v	S	ß	S	777	S		ςΩ		ςΩ.		U	2 02	ď	02 0	n w	ß	so t	2 02	S	02	n w	ι.
1	Type of service poin	9	1	9	9 -	ψ	3	н к	1	3	6	1	ы	3	9 -	1	1		9	9	×	1		-1 9		(*	'n	ю	Н	ųω	3	m r	ήH	3	00	2 -	ю
	Distance in km Chainage Name of service point	4	118+834		0.900 121+900 OPEN LINE JUNCTION 1	128+533	131+387	4:809 136+196 TABAKOVAC 2:568 138+764 TABAKOVAČKA RFKA	145+656	148+460	2.870 151+330 CRNOMASNICA 2.136 153+466 PATAC	156+828	160+192		4.242 16/+850 KOBISNICA 6.378 17.44.38 NRGOTIN	182+015	184+578	0.501 185+079 END OF LINE	0+000 OPEN LINE HINCHON 3	0.439 0+439 OPEN LINE JUNCTION 1	THOMASHI BART MORE LES		0.469 56+363 END OF LINE	2.320 2+320 OPEN LINE JUNCTION KASTRAT		3 053 3+300 \$ A WOOY A C	4+800		10+096	1.700 12+700 REČICA	14+700	1,525 16+225 PODINA	22+327	25+014	31+734	3.344 37+844 BELOLIN	1
transport	Left track	2	Н			1	Ц		L.	Ы	11/	1				1		-	+		H		1				L		1		L		_			1	01
public	-t-mi fig I	1						1914										- [П		П		П				28.02.	1925.				04.13	1929.	3	04.12.
handover to	Right track							-	4									- 1	- 1	ı	J				, ,				00	O.				- 2	100		



	əbutitlA	30	313.6						381.4	430.4		500.9					84.2	84.9	84.5	85	80.3	89.5	88.2						113.2	110.3		75.0	5.07	Ī			83.1	1.70	79.5	81.5
	Loading gauge	29	ŢSZ-I	7.S-I	7.S-I	I-SZ	ŽS-I	ŽS-I	ZS-I	ZS-I	ZS-I	ŽS-I	I-SZ	1-8%				ŽS-I	ŽS-I	ŽS-I	75.1	Į-SZ	ŽS-I					Ī	76.1	ŽS-I		Ī	ŽS-I			ŢS-I	ì	Ţ-SZ	ŽS-I	ZS-I
the line [daV]	←	28				1			1								h	73		9		+	-					ŀ	v	1]	Ż	Ţ,		F	3	h	Ĺ		
Ruling resistance of	\rightarrow	27	ij			1				5	2	15	H	3				2	2	00	,		1					Ī	6	1	11	ı	S	Ш		1			'n	4 1
Ruling gradient	Slope		-	+	+	0	0	\vdash	+	0 0	-	1	_	0 0	4 1			64	1	9	ď	+	1						v	+	11	1	0		E	m			0	0 0
	Gradient of the statio		2.0 5	2	9 4	o v	7		1.0	2 00	400	1.7 15	16	2 5			0.0	0.0		0.5 8	1 8	4/4	0.3					ł	27.2	Y .	11	ŧ	4	1	H	0	2.0	7.7	3.0 4	0.0 3
	Minimum curve radi	1		300	300	300	300	300	300	300	300	400	300	300			F	F		200		Œ.	200					ŀ	00%			Ť	1			Ħ	Ė	450		
odenstT Tangieri	Open for passenger	22	щ	4	24	Í	P	Ъ	d,	д, д	A	Д	<u>д</u> , г	4			F		Í			T	P/F			ATTON		ı	P/F			þ		7.5			D/E	T d	P/F	
finioq ə	Occupancy of servic	21	D	T	1) 			b	þ		p	T	t	11		#	þ	ū	Ω	F	Þ	ы	П	100				r F	2	11	1		TRAFFIC	F	Ξ	E		Þ	םם
шодг	Iq gnibsol-bnə\-əbi2	20							S	v	2				1		v.	2			Ì		S/E			EXE			S/E			Ī	П	E			v		S	w w
	Freight car scales	19	T								I				1					7			Yes		15	LOF.		İ	j	D	11	1		FOR						
onc	Service point code -	18	11111	11126	11112		11122	11125	11115	111127	11123	11117	11120	0 11110			23306	24202	24203	24204	24205	24207	25550			RAIL WAY LINE OUT OF EXPLOITATION			23450	CTCL7				LINE CLOSED FOR			23001	23002	23003	23004
he service point	Manner of securing l	17	80	1	V	9			œ	DO		80				ľ	-	1	1	23	,	10	4			'AY I			4 5	2	1	10	10	LINE	7	7	8	10	10	3 10
ព០ដំនណៃ	Manner of traffic reg	16	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance		ca)**)	ERVICE	station distance	station distance	station distance	station distance	station distance	station distance		900000	RAILW			station distance	station distance	Novi Sad (km 1+042) - Novi Sad Ložionica LINE CLOSED FOR TRAFFIC	(Kac)	station distance	". (Bodhara)	(romona)	station distance		station distance	station distance	station distance
<i>v</i> . σ	acceptance of the longest trains	15	53	t	i				2	7 and 3		2		Ì		- (Dreni	3 and 4	2 and 3	2 and 3	2 and 3	2 and 3	2	2 and 3						2 and 3	7 000	SED FO	- open line junction "2" - (Kac)	7 100	innotion 3	Torron 22		2 and 3	dina.	and 2	2 and 3
Direction B→A	Maximum permitted Irain length Iracks for	14	410		Ť		H		557	6 595	+	493		t	a - Peć **	nction 1	938 3		1	738 2	6 369		403 2	orika				15.1	327 1	1	AE CEC	une junci	-	line int		_	abalj ses		-	293 2
	scceptance of the longest trains		2	Ì	Ì	f			2	2 and 3	+	2	1	t	Metohija	Kosovo Polje Terema - open line junction 1 - (Drenica)**)	226 Vibas - Sombor LEMPORARIL Y SUSPENDED TRAIN SERVICE 943 3 and 4 938 3 and 4			2 and 3	2 and 3	+	Н	Subotica - Subotica fabrika					2 and 3	+	ionica LD	.,3" - open II	+	1" - onen line	100	1	šančevi - Zab	-	and 2	2 and 3
Direction A→B	Maximum permitted train length Tracks for	1	410	1					557	6 393	+	493	+	ŀ	Kosovo Polje - Metohij	etma - op	943 3	+	Н	738 2	6 363	1	403 2	potica - Subotica				otica - St	377 1	T	SadLož		1	-	monon,		Rimski šan	-	-	293 2
pəəds	Left track	11		1	ų.		1			2					Kosove	Polje Te	TEMPC							301 Sub		6-		302 Sub	Ī		voN-(line ju		line			306			
Maximum permitted	Right track	10							3						224	OAOSC	mpor			u.d									q	'n	1+04		40	. (io	00	Ť		40	20	3.
X	Railway line categor	6	Y.	A .	A	4	A	A	Y	A A	¥.	A	¥ <	4		222. Ko	SE - SE	2	IJ	¥.	A A	A	A		18	8	3	f	Α,	ć ¥	d (km	304 Podbara	Ð	ر ا ا		8	î	Ą	A	A A
	Class of railway line	00	24	24	× c	4 4	K	ĸ	N	2	124	~	P4 P	4 2		22.5 2	0 VE	ø	K	2	24 0	4	æ	L	ď	-T	4	I	F	ı h	ovi S	304 1	Н	Dimehi	Yellin	н	1	П	Ţ	i i
əuj	Single/double-track	7	S	S C	S C	2 02	ď	ď	co.	so so	S CO	S	so c	2 0		Ś	77	Ø	S	ςΩ (N U	S	¢Σ	ŀ	100	02 0	2		V	2 02	303 N		S	S	5	S	1	Ø	52	ω w
1	Type of service poin	9	00	6	<i>c</i> 0 <i>v</i>	9	3	e,	10	e -		œ	i,	13				4 14	1	1	3	10	1		ī	ı		I	+ +	4			9	9	9	9	1	4 66	Ţ	1 1
	Distance in km Chainage Name of service point	4	46+646	49+300	2.700 52-000 PEPELJEVAC	54+855	59+100	008+09	62+810	4.515 67+325 DESISKA 2.555 69+880 KOSANIČKA RAČA	73+700	75+895		4.037 834400 ADMINISTRATIVE LINE			37+137 VRBAS	10.516 47+653 KULA	54+971	7.705 62+676 SIVAC			10.015 89+710 SOMBOR		0+000	3.708 3+708 SUBOTICA FABRIKA	d un		1+255 SUBOTICA	0.400 4+000 END OF LINE	П	4+413[ITOTISAPA		1.077 7+659 OPEN LINE JUNCTION 2	0+000 OPEN LINE JUNCTION 1	0.910 0+910 OPEN LINE JUNCTION 3	10+370 RTMSKT ŠANČEVI			7.621 27+355 GOSPOĐINCI 6.661 34+016 ŽABALi
transport	Left track		3.3	1]	4		1	- I	Н	Ш		L			-	H			-	1	ĭ			1	002+330		,	10			73			4	F	-	Ц	41.3
Date of handover to public	Right track	Ē		.90.90	1930.					15.05	1949.									21.12.	1906.				08.01	1885.	3) up to km									01.03.1969.		20 00	1899.	



	Altitude	30	1	137.7	147.7	147.7		t	77	77	11	82.5	83.1		101.7			167	193.4	245.9		271.5			101	101	10	73	72	5,68	89,5		101	101		80				
	Loading gauge	29		75-1	ŽS-I	ŽS-I			ŽS-I	ŻS-I	7-57		ŽS-I		ŽS-I	ŽS-I	ŽS-I	ZS-I	ZS-I	78-1	ŻS-I	ŻS-I	ŽS-I		1	ZS-I	70.1	1-SZ	ŽS-I	Zs-I	ŽS-I		75.1	2		75.1	1 22			ŽS-I
resistance of the line [daN]	· ←	28	Ī	Ĭ	3	3		-	Ī	m			-	t	ব		+					3				ę	2	4		4									İ	6
Ruling To apprece of	\rightarrow	27			S	S				2			10 10 13		ব		1	00	7	1		18				4	٥	9	,	9		4				- 0		П		
Ruling gradient	gobe	-	1		2	7		-		n		Ā	01 0	L	m	\vdash	-	-	0	0		0 9					n	6	-	4			L	H		C	-	П	-	00
- 0	ncline		4	0.0	0.0	0.0		9	0.2	2.0 1	8.0	0.0	10	H	1.9			0.0	1.0	10		0.0	4		2,5	5,0	5,13	18 5		2,0 5	1,5		2.5	}		-	2	П	H	0
	Minimum curve radi	H		2002				-	300 0	27	2 007	0	300	F	338	100	10		009	400	400	1	200			300	CL,2	1.	494 3.57	1	300 1	5	,			SOO	200		F	H
	Open for passenger /		ł		P/F			4	P.P.	Ъ			3	P/F	Г			+	ы			7			P/F		1	T		H	T)		P/F	F		P/F			4	4 154
			ŀ	Ы	P	H		-	-	d	4	Ė	H	9	+	\vdash	-	4	-	þ		J.	4		P	+	+	10	+	E	H	ø	р	-	1 1	д	4	П		11
	Side-/end-loading place Side-/end-loading place	-	ŀ		F			-	24	H	+	H	H	5	-	\vdash	-		S	S		SU	+			+	t	+	+	S			S/E		łł	S	1	П	Q.	
2007	Freight car scales		1			H		F		H	1	H	Ħ	F	1	H	H		+	+		7	Ħ		Yes S/E	Ŧ	t	+	F	Ť			VedS	2	1	*	1	П	ř	+
OIC.	Service point code -	П	Ì	16316	16317	16317		1001	16014	21101		F	ī	13404	13901	13902	13903	2000	13905	13907	13908	13909			21009	11301	21301	21303	21304	21305			21000 15			22850			16203	16205
he service poin	Manner of securing t	17	1	6	4	4		-	9 23	4	+	1		-	9	\vdash	Ť	-	9	19	-	9	Ħ	Н	7	- 1	7	6	+	6			-	+	1	2	2	П		10
noitslu	Manner of traffic reg		Grad	station distance	station distance	station distance			station distance	station distance	ion point 23 - (Orom)	station distance	station distance		station distance		station distance	100 Car Car Car Car Car Car Car Car Car Car	station distance	station distance	station distance	station distance	station distance			station distance	station distance	station distance	station distance	station distance	station distance					station distance	and district	7.7		station distance
5.4	acceptance of the	15	- OPEN LINE JUNCTION Donaj Bonna - Zvornik Grad	Ī	2 and 3			1	2 and 3	3 and 4	- imc			Savica	8	H		+	3	2		4			4 and 5			1 and 2		2 and 3			d and 5		a 6+413)	2 and 3	403 Bogojevo - Dunavska obala LINE CLOSED FOR TRAFFIC	404 Paraćin - Stari Popovac LINE CLOSED FOR TRAFFIC	۴	
Direction B→A	Liscks for	4	Bonna		398 2		Hand	Voltovica	2000	174 3	22 Juioc		-6	812.	299	H	+		790	764		909			643 4	H	ł	753 1	+	681 2					leks (km	842 2	SED FO	D FOR	men 733	3
	ongest trains Maximum permitted		Dona	ł	+	\vdash	X	인	_		nction			RADIOGS	90	Н	H	1	12	7		.2(** **	Crkva	5 6	+	+	+	+	-		NES	v asarıs	+	komp	+	CLOS	TOSE	Becm	3
Direction A→B	receptance of the	13	NCITON		2 and 3	-	×		7 and 3	3 and 4	the station Senta: (Coka) - innetion point 22		_ ;	511 Markovac - Syndjilac - Despolovac - (Kesavica	3			4	3	2	Ш	4	313 Metchiie - Deizeen **	313 Vršac - Bela Crkva	4 and 5			1 and 2		2 and 3		SHUNTING LINES	401 Vrsac - Vrsac Vasariste	+	Kikinda - Metanolsko sirćetni kompleks (km 6+413	2 and 3	ala LINI	c LINE (405 Surčin - Jakovo Bečmen	
	Maximum permitted Tain length	12	DE EN		398		47.	SVO Varos	900	174	nta: (Č	L		855	199			001	28	764		506	Mato	13 Vrš	643			753	}	189		SHUN	Vrsac	9	anolsk	847	zka ob	opova	Surcin 733	3
sbeed bermitted	гец цяск	H	PENL	50		+	×	309 Pancevo		00	tion Se		40	DRAGN		20	1				1		31	33				30			1			50	la - Mei	20	- Duna	Stari I	405	20
mumixsM	Right track						66	30			he sta			Mar										Ш										9	Cikino		oveje	aćin		
Á	Railway line categor	6	08 (Brasina	A	A	A			D2	D2			A	7	B2	A	A	Y.	A.	A A	A	A	A	П		¥ 4	₹ <	4	¥	Ą	A	î		C2		⋖	Bogo	14 Pa		A
	Class of railway line	∞ §	38 (B)	F	A	н		Ī	ų		L D2		н	Ī	А	H	п	μ,	j,	7	Т	T	a	П	J	14	4 -	4 12	1	н	4		Ī	man		man	403	40	1	man
que	Single/double-track l	\Box	3(V.	2 52	S		1	ď	co c		_	S	Ī	ζ.	co.	S	S C	02	n o	S	S	S	Н	3	σ ₂ c	n v	2 02	S CO	S	S		Ī	W	1 1	v	1	П	Ī	02 0
1	Type of service poin	9	1	9 6	2	н		-	- 6	1	310 Connecti	12	13	-	-	m	60	-,	٠,	n -	3	1		Ш	-	9 0	0 6	7 -	1 00	ī			-	7 7		1	1	П	-	
								Ī			310									i						i							ĺ		İ					
	Name of service point	8		68+685 OPEN LINE JUNCTION DONJA BORINA 70+600 RADATi	4 ZVORNIK	75+300 ZVORNIK GRAD	up to km 074+000 the maximum permissible speed is 10 km/h	DANY CONTROL TAN OC	U+368 PANCEVO VAROS 1+300 PANČEVO STRELIŠTE	4 PANČEVO VOJLOVICA	5+4/5 END OF LINE	7 JUNCTION POINT 22 SENTA	39+164 JUNCTION POINT 23 SENTA	0+500 MARKOVAC	2 SVILAJNAC	0 SEDLARE	0 RESAVSKO JASENOVO	-	0 DESPOTOVAC	O VOINTK 4 DVORIŠTE	0 DUTOVO	0 RESAVICA	53+750 END OF LINE		87+546 VRŠAC	14 OPEN LINE JUNCTION B JASENOVO	3/ +203 POT POKALN	SIASENOVO			0 END OF LINE		8 VRŠAC	3+415 VRŠAC VAŠARIŠTE		0+000 KIKINDA 6+285 MSK (INDITSTRIAL TRACK)	(Market Harris County) Ment		12H00 SIRČIN	15+500 JAKOVO-BEČMEN
	Chainage	4					maximum perm	2010				38+407		0+40						80 36+400 64 42+564								242		5.0	5.5		0+55	Ш					12+10	
	Distance in km	3		1 015	2.854	1.846	+000 the		0.732	1.614	0.361		0.757		9.432	7.568	5.700	4.270	7.350	1.580	3.2	7.560	0.390			1+118	5443K	4+816	7+134	4+418	2+433		ŀ	2.857		6 285	2			3.400
Date of pandover to transport	Right track Left track	H			15.05. 1950.		up to km 074+		11.11	1935.				01.09	1951.		29.11.	1951.			1967.					20.07.	1858.			01.11.1856.										



	əbutitlA	30			Ţ																								
	Loading gauge	29			1				П																				
the line [daV]	· · · ·	28			ξ				Н	П					1														
Ruling resistance of	->	77							П																				
fra dent	Slope	26			ξ	1	H		П																				
gniluA	puline	25			l ŝ			1	П	П	Ц																		
[0%] u	Gradient of the statio	24			1)	Ц			Ш																				
sr	Minimum curve radio	23			{																								
oqsusıA Adgiəti	Open for passenger /1	22			ŝ	L			П		д	Д	д			002).													
iniog s	Occupancy of service	21			B				П	П	H	n	H	F	H	31, 2													
mont	sid gnibsol-bnə\-əbi2				Ì	П		1			T				11	d May		77	₿										
	Freight car scales					T		7			T				1	3 date	1	rder	T CHI SILVI										
oic	Servi ce point code - 1															72002 - 15	0	13 State border	+ liane										
he service point	Manner of securing t	17			3					Н	Ħ				H	\$000 at	÷	-	-										
aoitslu	ger official to remain	16	Sremska Rača Nova - state border - (Bij ejjina) LINE CLOSED FOR TRAFFIC	C					FIC	Ψ		station distance	station distance	station distance		Temperary Agreement between ZTP Belgrade and UNMIK railways, dated May 31, 2002 (records No 500/2002 - 153 dated May 31, 2002)			Praffic and transport dispatching point	ū		s and signals. Ials.	nals.					orm	
	longest trains		SED	AFF	Ιĝ	Н	+	- !	KA	Seora	\vdash	Т	H		H	, date		3	opoatchir			irnouts id sign	id sign					a platf	
к⊷а	Tracks for	13	CLC	R TR	Ш	Ш		1	1 K	5		Ш	L			ilways		1	and su			reen tu	outs an					oading	
Direction	train length	4	LINE	D FO	63	П			EDF.	refer			T		1	MK ra		90	Praffic and transport dispa	int		e betw	thum the					d end-l	
	Maximum permitted	1	ina)	OSEI	abrik	Ц		_ (LOS	te B	L				Н	UNIV		Speed change	andt	Loading point		endanc etweer	etwee					ide and	
V—B Direction	Tracks for acceptance of the longest frains	13	er - (Bijel	407 Ovča - Padinska Skela LINE CLOSED FOR TRAFFIC	408 Sonta - Apatin Fabrika				409 Bačka Palanka - Gajdobra LINE CLOSED FOR TRAFFIC	501 Sarwan Vitasi - Mokra Gora - State Border - (Višegrad)						selgrade an	2	and of	10. Lispa 11 Traffi	12. Load		chnical depr	gnals and routes. There is technical dependance betwee There is no dependance between turnouts and signals wite and semaplone stanals.	re signals		ıals		ading platform and S/E for the service point with side and end-loading platform	1
Direction	Maximum permitted Train length	12	te bord	a Skela	Sonta			1	Jajdobr TOTT	Mokra						an ŽTP B						nere is tec Amical de	shnical de ween tum	semaphor		hore sign		service :	manned service points
pəəds	reit track	П	a - st	dinsk	408				THIAN	tasi -						betwe		ο.				tes. T	e is te ice bet mals	ys and	ignals	semai		for the	8
Maximum permitted	Right track	10	Nov	a - Pa	Ц			-	Palai	Van Vi		30		20		ement	4	Train recording point and stop	stop			and rol	s. Ther pendar	via ke	shore s	nts and		nd S/E	e point
	Railway line categor <u>]</u>		ı Rača	Ovč	Ś		A:	A a	Sacka	Saro			ī		Н	y Agre		point	Open-line innotion and stop	d stop		ignals I route	d route	rnouts	semai	turno	*3	form a	servic
	Class of railway line	8	emska	407	lè	-	-	IIIAII /	409 1	501	-		H		H	nborar		ording		ount ar		outs, s	here is	reen tu	uts and	etween	ffuser	ng plat	anned
		-			Ιĉ	-	100	30		П	H	_	-		H	he Ten		Lrain recording po	an-line	ding b	OWIC	d turn	s, sign nals T	e betw	turnou	auce pi	and di	-loadir	arily m
	Single/double-track l	7	406 Šid-		K			2	1	П	H	ζΩ	S		H	ng to t	E	- C	8	T oa	010	ation curnout	armout ght sig	endanc	tween	ebend	mouts	ague th end	mpor
1	Type of service point	9	40		Š	9	κ, -		1		Ξ	2		13		, accordi	ų	กัน	5 F	co	ads pan	centralis	etween ti etween lig dance het	nical depe	dance be	chnical d	stween to	e point wi	nd T for te
	Name of service point	8			The street was a second	20+863 OPEN LINE JUNCTION SONTA	27+055 SVILOIEVO	OU AFALIN PABRINA			254+706 SARGAN VITASI	262+262 JATARE	270+146 MOKRA GORA	276+951 STATE BORDER	9) Distance in kin between the service points is not equal to the difference of their line kin positions	**) The lines on the territory of K os or o and Metolnia are temporarily under the supervision of UNMIK, according to the	Type of service point	. Station	C. Farsing Pome 3 Stor	4. Open line nunction and train recording point 8. Loading point and stop	Column 10 and 1.1- datum referred to in orackets indicate maximum penni Col. 17- Manner of securing the service point	. Electro-riday signaling-safety devices for comprehensive centralisation od turnous, signals and routes. There is technical dependance between turnous and signals. 2. Electro-riday signalling-safety devices for partial centralisation od turnous, signals and routes. There is technical dependance between turnous and signals.	3 Eletto-relay signaling-safety devices - key dependance between tumouts, signals and routes. There is technical dependance between tumouts and signals 4 Electro-relay signaling-safety devices with dependance between light signals. There is no dependance between tumouts and signals. S. Electromechanical Make, derice. There is technical dependance between tumouts and dependance between tumouts and dependance.	of income chanical interfocking block device. There is technical dependance between turnouts via keys and semaphore signals.	7 Mechanical signal point machine There is technical dependance between turnouts and semaphore signals	 Electromechanical permissive block device. There is no fechnical dependance between furnouts and semaphore signals. Ordinary signal point for semaphore serials. 	10 Electrical diffusers. There is no technical dependance between turnouts and diffusers.	 Access signar, 1 unions are secured by occasing activities without signar. Col.20S for the service point with side-loading platform, E for the service point with end-log 	Col. 21 P for permanently manned, U for permanently unmanned and T for temporarily manned service points Col. 22 D for enemy a contract of the manned service for missed for expension and U.S. for permanent and the missed for expension and the misse
	Сћајпаде	4.			į	20+80	13.0	3			254+7(the service j	y of Kosowo	Col 6			2	Col 17- M.							Col. 20-S F	Col.21
	Distance in km	3			Į		6.192	chc.o				7.556	7.884	6.805	n between	the territor													
transport	Left track	7			7			1				Ī			d ma	nes on													
handover to	Right track	5)istanc	The lin													
Date of	alcout trigig			Ш	Ш					F					*	*													



Appendix 7. Overview of primary train delay causes

	Primary train delay causes (IŽS)
No	Name
1.	Waiting for dispatch
2.	Waiting at the automatic block signal or protective signal
3.	Dispatcher's order
4.	Delay caused by the fault of an infrastructure manager's employee
5.	Entrance/exit to a turn
6.	Traffic on the left track
7.	Speed decrease requested by the infrastructure manager
8.	Delivery of order to the train driver
9.	Unplanned line closure by the infrastructure manager
10.	Level-crossing failure
11.	Failure on the overhead contact line
12.	Extended stay of railway vehicles
13.	Delay caused by restricted-speed running
14.	Rail crack
15.	Deformed track
17.	Technically defective switch
18.	Collision, bumping, derailment, avoided collision of railway vehicles
19.	Failure of signalling-interlocking and telecommunication devices
20.	Extension of the foreseen closure (more than 30 min)

	Primary train delay causes (railway undertaking)
No	Name
1.	Increased passenger frequency
2.	Waiting for railway undertaking staff
3.	Waiting for locomotive or multiple-unit set
4.	Delay caused by the fault of an railway undertaking's employee
5.	Cleaning of wagon or multiple-unit set requested by the railway undertaking
6.	Brake test
7.	Failure of wagon, traction unit or multiple-unit set
8.	Wagon repair without de-coupling
9.	Decreased train speed due to failure of wagon/multiple-unit set/traction unit
10.	Change of composition requested by the railway undertaking
11.	Intervention of police officers, requested by train staff
13.	Waiting for shunting locomotive

146



15.	Shift change of railway undertaking's employees
16.	Waiting for train forming
17.	Weighing
18.	Special consignment transport
20.	Stopping for cooling of brake shoes
21.	Delay caused by turnover of the multiple-unit set/traction unit of the same composition
22.	Accident on industrial siding of the transport client
23.	Breakdown of brake system air duct
24.	Train passing by the signal which indicates that the further running is forbidden
25.	Unallowed train passing through the service point where it had to stop

	Primary train delay causes (external influences)
No	Name
1.	State needs
2.	Train accepted with delay by another railway management
3.	Train rejected by another railway management
4.	Waiting for train staff of another railway management
5.	Train incorrectly formed by another railway management
6.	Taking a defective wagon of another railway management out of service
7.	Taking an incorrectly sent wagon of another railway management out of service
8.	Another railway management's employee being late
9.	Natural disasters (landslide, flood, current, snow-drift, avalanche, fire, fog)
10.	Falling out of train
11.	Jumping in or out of train
12.	Holding of the train by police officers
13.	Holding of the train by custom-inspection officers
14.	Emergency brake abuse
15.	Emergency service intervention
16.	Level-crossing device breaking
17.	Train rocking
18.	Theft of equipment or devices owned by the infrastructure



	Secondary train delay causes
No	Name
1.	Waiting for crossing
2.	Waiting for overtaking of a train
3.	Waiting for annunciation
4.	Waiting with the train which is in delay
5.	Extended stay in the station due to waiting for regular passing
6.	Waiting for locomotive or multiple-unit set from turnover
7.	Waiting for railway undertaking's staff from turnover
8.	Delay caused by failure of another train's traction unit
9.	Waiting for train connection (passenger or goods) of another railway management
10.	Abuse of emergency brake on another train
11.	Announced strike of IŽS or RU
12.	Another train accident



Appendix 8 Overview of platforms and arranged surfaces in service points

Service point Location beginning and the color Platform stranged of platern 1 2			km position of the		Ī	Dimensions	s
1 2 3 4 5 6 7	Service point	Location					
BELGRADE CENTER Instrument	Stritte point			surface	_		
NOVI BEOGRAD Serveen the 41st and 25th track 10-120-0-00-0-0100 palations 420,00 0.55 10,00 10.00 10	1	2		4		Height (m) 6 0 0,55	
NOVI BEOGRAD	-		<u>-</u>			Ü	
BELGRADE CENTER				r - (Tovernik)			
BELGRADE CENTER					420.00	0.55	10.00
BELGRADE CENTER				1			
between the 8th and 9th track 0+120-0+00-0+300 platform 420,00 0,55 7,00 next to 10th track 3+204,17 - 3+679,48 platform 475,00 0,55 3,86 track* 3+204,17 - 3+679,48 platform 475,00 0,55 3,86 track* 3+204,17 - 3+679,48 platform 475,00 0,55 3,86 track* 3+204,17 - 3+679,48 platform 475,00 0,55 3,86 track* 3+204,17 - 3+679,48 platform 475,00 0,55 3,86 track* 3+204,17 - 3+679,48 platform 475,00 0,55 3,86 track* 3+204,17 - 3+679,48 platform 475,00 0,55 3,86 track* 3+204,17 - 3+679,48 platform 475,00 0,55 3,86 track* 3+204,17 - 3+679,48 platform 475,00 0,55 3,66 track* 3+204,17 - 3+679,48 platform 475,00 0,55 4,00 track* 3+204,17 - 3+679,48 platform 475,00 0,55 4,00 track* 3+204,17 - 3+679,48 platform 475,00 0,55 4,00 track* 3+204,17 - 3+679,48 platform 475,00 0,55 4,00 track* 3+204,17 - 3+679,48 platform 475,00 0,55 4,00 track* 3+204,17 - 3+679,48 platform 475,00 0,55 4,00 track* 3+204,17 - 3+679,48 platform 475,00 0,55 4,00 track* 3+204,17 - 3+679,48 platform 475,00 0,55 4,00 track* 3+204,17 - 3+679,48 platform 475,00 0,55 4,00 track* 3+204,17 - 3+679,48 platform 475,00 0,55 4,00 track* 3+204,17 - 3+679,48 platform 475,00 0,55 4,00 track* 3+204,17 - 3+679,48 platform 475,00 0,55 4,00 track* 3+204,17 - 3+679,48 platform 475,00 0,55 4,00 track* 3+204,17 - 3+679,48 platform 475,00 0,55 4,00 track* 3+204,17 - 3+679,48 platform 475,00 0,55 4,00 track* 4+204,17 track* 3+204,17 - 3+679,48 platform 475,00 0,55 4,00 track* 4+204,17 track* 4+204,17 track* 4+204,17 track* 4+204,17 track* 4+204,17 track* 4+204,17 track* 4+204,17 track* 4+204,17 track* 4+204,17 track* 4+204,17 track* 4+204,17 track* 4+204,17 track* 4+204,17 track* 4+204,17 track* 4+204,17 tr	DEL CD A DE CENTED						
next to 10th track	BELGRADE CENTER						
NOVI BEOGRAD							
NOVI BEOGRAD							
NOVI BEOGRAD				platform			
NOVI BEOGRAD			3+204,17 - 3+679,48	platform	475,00	(m) 6 0,55 0,55 0,55 0,55 0,55 0,55 0,55 0,	3,86
Detween the 3rd and 4th rack 3+204,17-3+679,48 platform 475,00 0,55 3,86			2 . 2 . 4 . 4	•	45500		10.16
Setween the 3rd and 4th	NOVI BEOGRAD			platform		0,55 0,35 0,35	
Between the 4th and 5th track			3+204,17 - 3+679,48	platform	475,00	0,55	3,86
Tosin bunar				•			
Tošin bunar						_	
Nova Pazova Nova Pazova				•			
Detween the 1st and 2nd track S+104,79 - S+274,76 platform 110,00 0,55 6,16	Točin hunar	next to right track	5+104,79 - 5+274,76	platform	110,00	†	
Altina	1 OSIII Ouildi	next to left track	5+104 <u>,</u> 79 - 5+274,76	platform	110,00	0,55	
Altina		between the 1st and 2nd track	8+276 - 8+676	platform	400,00	0,55	6,16
Detween the 6th and 7th track	ZEMADI				400,00		
Detween the 8th and 9th track S+321 - S+676 platform 355,00 0,55 6,16	ZEMUN	between the 6th and 7th track	8+321 - 8+676	platform	355,00	0,55	6,16
Altina		between the 8th and 9 th track		platform			
Detween the 1st and 2nd track 10+997-11+107 platform 110,00 0,55 4,00	Altina						
Detween the Ist and 2nd track 12+264-12+374 platform 110,00 0,55 4,00 between the 2nd and 3rd track 12+154-12+374 platform 220,00 0,55 6,16 0,55 4,00 0,55 4,00 0,55 4,00 0,55 4,00 0,55 4,00 0,55 4,00 0,55 4,00 0,55 4,00 0,55 4,00 0,55 4,00 0,55 0,16 0,00 0,55 0,16 0,00 0,55 0,00							
between the 2nd and 3rd track 12+154-12+374 platform 220,00 0,55 6,16		<u> </u>					
Between the 3rd and 4th track 13+264-12+374 platform 110,00 0.55 4,00	ZEMUNSKO POLJE						
Namendin							
Namendin							
Next to 1st track 18+884 - 19+104 platform 220,00 0,55 4,00	Kamendin					Height (m) 6	
BATAJNICA between the 2nd and 3rd track 18+884 - 19+104 platform 220,00 0,55 6,16 next to 6th track 18+884 - 19+104 platform 220,00 0,55 7,41				-			
NOVA PAZOVA between the 4th and 5th track 18+884 - 19+104 platform 220,00 0,55 7,41	PATA INICA						
NOVA PAZOVA between the 4th and 5th track 26+993-27+243 l.n. platform 250,00 0.55 7,91	BATAJNICA			•		Height (m) 6 0,55 0,55 0,55 0,55 0,55 0,55 0,55 0,	
STARA PAZOVA	NOVA BAZOVA						
STARA PAZOVA between the 5th and 6th track 35+015-35+265 l.n. platform 250,00 0,55 6,16	NOVATAZOVA						
Between the 2nd and 3rd track 45+767-45+914 platform 147,00 0,35 1,60	STARA PAZOVA			•		Height (m) 6	
Between the 3rd and 4th track 45+767-45+914 platform 147,00 0,35 1,60							
PUTINCI between the 2nd and 3rd track 53+611,93-53+691,91 platform 79,98 0,35 1,60	GOLUBINCI						
Note							
Next to right track S3+611,3-3-3+91,91 Platform P9,98 0,35 1,00	PUTINCI						
Next to left track 59+985,29-60+065,29 platform 80,00 0,55 4,00				•			
Next to left track S9+983,29-00+063,29 platform S0,00 0,35 4,00 0,35 1,60	Kraljevci						
RUMA between the 3rd and 4th track 64+733-64+973 platform 240,00 0,35 1,60 between the 4th and 5th track 65+821-64+937 platform 116,00 0,35 1,60	,						
Detween the 4th and 5th track 65+821-64+937 platform 116,00 0,35 1,60	DIE C.				-		
VOGANJ between the 2nd and 3rd track 73+368-73+518 arranged surface 150,00 0,00 2,00	RUMA				-		
between the 3rd and 4th track 73+368-73+518 arranged surface 150,00 0,00 2,00							
SREMSKA MITROVICA between the 3rd and 4th track 73+368-73+518 arranged surface 150,00 0,00 2,00 2,00 between the 2nd and 3rd track 81+563-81+763 platform 200,00 0,35 1,60 between the 3rd and 4th track 81+563-81+763 platform 200,00 0,35 1,60 between the right and left track 86+109,30-86+159,30 platform 50,00 0,35 1,60 between the 2nd and 3rd track 94+059-94+159 platform 100,00 0,35 1,60 between the 3rd and 4th track 94+131-94+141 platform 10,00 0,35 1,60 between the 2nd and 3rd track 104+935-104+985 platform 50,00 0,45 1,60 between the 3rd and 4th track 104+990-105+040 platform 50,00 0,45 1,60 between the 3rd and 4th track 109+070-109+097 platform 27,00 0,35 1,60 Gibarac NONE SID between the 1st and 2nd track 116+300-116+490 arranged surface 190,00 0,10 2,50 2,50 constant of the con	VOGANJ			-			
between the 3rd and 4th track 81+563-81+763 platform 200,00 0,35 1,60	, 551110						
Laćarak between the 3rd and 4th track 81+563-81+763 platform 200,00 0,35 1,60	SREMSKA MITROVICA						
MARTINCI between the 2nd and 3rd track 94+059-94+159 platform 100,00 0,35 1,60 Kuzmin KUKUJEVCI-ERDEVIK between the 2nd and 3rd track 104+935-104+985 platform 50,00 0,45 1,60 Bačinci next to right track 104+990-105+040 platform 50,00 0,45 1,60 Gibarac NONE ŠID between the 1st and 2nd track 116+300-116+490 arranged surface 190,00 0,10 2,50				•			
MARTINCI between the 3rd and 4th track 94+131-94+141 platform 10,00 0,35 1,60	Laćarak	ĕ					
Kuzmin NONE KUKUJEVCI-ERDEVIK between the 2nd and 3rd track 104+935-104+985 platform 50,00 0,45 1,60 Bačinci next to right track 104+990-105+040 platform 50,00 0,45 1,60 Gibarac next to right track 109+070-109+097 platform 27,00 0,35 1,60 NONE SID between the 1st and 2nd track 116+300-116+490 arranged surface 190,00 0,10 2,50	MARTINCI			•	-		
KUKUJEVCI-ERDEVIK between the 2nd and 3rd track 104+935-104+985 platform 50,00 0,45 1,60 Bačinci between the 3rd and 4th track 104+990-105+040 platform 50,00 0,45 1,60 Bačinci next to right track 109+070-109+097 platform 27,00 0,35 1,60 Gibarac NONE ŠID between the 1st and 2nd track 116+300-116+490 arranged surface 190,00 0,10 2,50		between the 3rd and 4th track		platform	10,00	Height (m) 6 0,55 0,55 0,55 0,55 0,55 0,55 0,55 0	1,60
KOKUJEVCI-ERDEVIK between the 3rd and 4th track 104+990-105+040 platform 50,00 0,45 1,60 Bačinci next to right track 109+070-109+097 platform 27,00 0,35 1,60 Gibarac NONE ŠID between the 1st and 2nd track 116+300-116+490 arranged surface 190,00 0,10 2,50	Kuzmin						
Bačinci next to right track 104+990-105+040 platform 50,00 0,45 1,60	KIIKIIIEACI EDDEAIA	between the 2nd and 3rd track	104+935-104+985	platform			1,60
Gibarac NONE SID between the 1st and 2nd track 116+300-116+490 arranged surface 190,00 0,10 2,50	KUKUJE V CI-ERDE V IK	between the 3rd and 4th track	104+990-105+040	platform	50,00	0,45	1,60
ŠID between the 1st and 2nd track 116+300-116+490 arranged surface 190,00 0,10 2,50	Bačinci	next to right track	109+070-109+097	platform	27,00	0,35	1,60
	Gibarac						
between the 2nd and 3rd track 116+300-116+665 platform. 365,00 0,45 1,60	čin	between the 1st and 2nd track	116+300-116+490	arranged surface	190,00	0,10	2,50
	SID	between the 2nd and 3rd track	116+300-116+665	platform.	365,00	0,45	1,60



		km position of the	Platform/arranged			
Service point	Location	beginning and the end	surface	Length	_	Widtl
		of platform	4	(m)	. /	(m)
1	2	3	4	5	-	7
102 D.L L. C	between the 3rd and 4th track	116+300-116+677	platform	377,00		1,60
102 Belgrade Cent	er-Junction "G" - Rakovica - M					10.00
	next to 3rd track between the 4th and 5th track	0+120-0+00-0+300	platform	420,00		10,00
DELCRADE CENTER		0+155-0+00-0+300	platform	455,00		
BELGRADE CENTER	between the 6th and 7th track between the 8th and 9th track	0+155-0+00-0+300 0+120-0+00-0+300	platform	455,00 420,00		10,00
	next to 10th track	0+120-0+00-0+300	platform platform	420,00		7,00
	next to 2nd track - right	8+460-8+786	platform	326,00		6,10
RAKOVICA	between the 3rd and 4th track	8+637-8+868	platform	231,00		6,10
KAKOVICA	between the 5th and 6th track	8+545-8+865	platform	320,00		6,20
	next to right track	10+645-10+758	platform	113,00		1,55
Kneževac	next to left track	10+645-10+758	platform	113,00		1,55
	next to right track	11+626-11+731	platform	105,00	0,55 0,55 0,55 0,55 0,55 0,55 0,55 0,55	1,55
Kijevo	next to left track	11+713-11+819	platform	106,00	Height (m) 6 0,45 0,45 0,55 0,55 0,55 0,55 0,55 0,55	1,55
	next to 1st track	14+080-14+240	arranged surface	160,00	Height (m) 6 0,45 abanovce) 0,55 0,55 0,55 0,55 0,55 0,55 0,55 0,5	4,00
RESNIK	between the 1st and 2nd track	14+080-14+240	platform	160,00	Height (m) 6 0,45 banovce) 0,55 0,55 0,55 0,55 0,55 0,55 0,55 0,5	1,55
KESIVIK	between the 3rd and 4th track	13+943-14+238	platform	295,00		6,20
PINOSAVA	between the 3rd and 4th track	NONE	plationii	273,00	0,55	0,20
Ripanj Kolonija	next to railway line - left	20+080-20+180	platform	100,00	0.35	1,00
rapanj isotonija	between the 1st and 2nd track	21+324,00-21+356,40	platform	32,40		1,00
RIPANJ	between the 2nd and 3rd track	21+265,70-21+361,20	platform	95,50		1,55
1311 7 11 10	between the 3rd and 4th track	21+265,70-21+361,20	platform	95,50		1,55
	between the 1st and 2nd track	24+743,40-24+804,00	platform	60,60		1,00
KLENJE	between the 2nd and 3rd track	24+743,40-24+804,00	platform	60,60		1,00
RIPANJ TUNEL	between the 1st and 2nd track	29+565-29+615	platform	50,00		1,60
	between the 1st and 2nd track	34+695-34+774	platform	79,00		1,60
RALJA	between the 2nd and 3rd track	34+695-34+774	platform	79,00		1,60
SOPOT KOSMAJSKI	between the 2nd and 3rd track	41+454-41+544	platform	90,00		1,60
VLAŠKO POLJE	between the 2nd and 3rd track	47+684-47+784	platform	100,00		1,60
MLADENOVAC	between the 2nd and 3rd track	53+089-53+190	platform	101,00	0,55 0,55 0,55 0,35 0,35 0,35 0,35 0,35	1,60
	between the 3rd and 4th track	53+030-53+190	platform	160,00		1,60
WOLLA ŠELLA G	between the 1st and 2nd track	59+954-60+109	platform	155,00		1,60
KOVAČEVAC	between the 2nd and 3rd track	59+907-60+056	platform	149,00	0,40 0,40 0,40 0,40 0,40 0,40 0,40 0,40 0,40 0,40	1,60
Rabrovac	next to railway line - left	62+909-63+045	platform	136,00		1,60
	between the 1st and 2nd track	67+497-67+650	platform	153,00		1,60
KUSADAK	between the 2nd and 3rd track	67+453-67+600	platform	147,00		1,60
Ratare	next to railway line - left	70+821-70+931	platform	110,00		1,60
	between the 1st and 2nd track	73+941-74+041	platform	100,00		1,50
GLIBOVAC	between the 2nd and 3rd track	73+978-74+078	platform	100,00	0,50	1,50
	between the 1st and 2nd track	78+476-78+586	platform	110,00	0,50	1,50
PALANKA	between the 2nd and 3rd track	78+476-78+586	platform	110,00		1,50
	between the 3rd and 4th track	78+476-78+586	platform	110,00		1,50
MALA PLANA	between the 2nd and 3rd track	85+505-85+605	platform	100,00		1,50
	between the 1st and 2nd track	90+350-90+400	platform	50,00	0,40	1,60
VELIKA PLANA	between the 2nd and 3rd track	90+289-90+430	platform	141,00	Height (m) 6 0,45 panovce) 0,55 0,55 0,55 0,55 0,55 0,55 0,55 0,5	1,60
V LLINA FLANA	between the 3rd and 4th track	90+370-90+510	platform	140,00	0,40	1,60
	between the 4th and 5th track	90+360-90+464	platform	104,00	0,40	1,60
Staro Selo	next to right track	94+008-94+055	platform	47,00	0,40	1,60
210 2510	next to left track	94+008-94+055	platform	47,00		1,60
Novo Selo	next to right track	97+660-97+706	platform	46,00		1,60
14040 9010	next to left track	97+660-97+706	platform	46,00	-	1,60
	between the 2nd and 3rd track	100+400-100+450	platform	50,00		1,60
MARKOVAC	between the 3rd and 4th track	100+350-100+452	platform	102,00	-	1,60
	between the 4th and 5th track	100+350-100+448	platform	98,00		1,60
Lapovo Varoš	next to right track	106+250-106+310	platform	60,00		1,60
Laporo raios	next to left track	106+250-106+310	platform	60,00	-	1,60
Lapovo Marshalling Yard	next to right track	108+350-108+400	platform	50,00		1,60
zapo to maishaning Tard	next to left track	108+340-108+390	platform	50,00		1,60
• ,=====	next to 1st track	109+460-109+510	platform	50,00		1,60
LAPOVO	between the 2nd and 3rd track	109+560-109+680	platform	120,00		1,60
	between the 3rd and 4th track	109+560-109+680	platform	120,00		1,60
Brzan	next to right track	114+140-114+190	platform	50,00	0,35	1,60



		km position of the	Platform/arranged			
Service point	Location	beginning and the end	surface	Length		Width
		of platform		(m)	` /	(m)
]	2	3	4	5	_	7
	next to left track	114+140-114+190	platform	50,00		1,60
Miloševo	next to right track	116+940-116+990	platform	50,00		1,60
	next to left track	116+940-116+990	platform	50,00		1,60
BAGRDAN	between the 2nd and 3rd track	120+229-120+330	platform	101,00		1,60
BAGRDAN	between 3 rd and 4th track	120+268-120+390	platform	122,00	0,35	1,60
I:¥4-	next to right track	126+920-126+970	platform	50,00	0,35	1,60
Lanište	next to left track	126+920-126+970	platform	50,00	0,35	1,60
D.1. V	next to right track	131+229-131+279	platform	50,00		1,60
Bukovče	next to left track	131+229-131+279	platform	50,00		1,60
	between the 1st and 2nd track	135+192-135+342	platform	150,00		1,90
JAGODINA	between the 2nd and 3rd track	135+122-135+364	platform	242,00		1,90
JAGODINA	between the 3rd and 4th track	135+182-135+416	platform	234,00		1,90
			1			
Gilje	next to right track	140+550-140+670	platform	120,00		3,00
<u>,</u>	next to left track	140+550-140+670	platform	120,00		3,00
PARAĆIN	between the 3rd and 4th track	155+081-155+184	platform	103,00		1,60
	between the 4th and 5th track	155+065-155+166	platform	101,00		1,90
Sikirica- Ratari	next to right track	163+560-163+610	platform	50,00		1,60
Sikirica- Katari	next to left track	163+565-163+615	platform	50,00		1,60
Drenovac	next to right track	166+605-166+655	platform	50,00	0,35	1,60
Drenovac	next to left track	166+605-166+655	platform	50,00	0,35	1,60
Ar America	between the 2nd and 3rd track	171+550-171+640	platform	90,00		1,60
ĆIĆEVAC	between 3 rd and 4 th track	171+550-171+640	platform	90,00		1,60
	next to right track	173+625-173+674	platform	49,00		1,60
Lučina	next to left track	173+625-173+674	platform	49,00		1,60
	between the 2nd and 3rd track	176+222-176+425	platform	203,00		6,40
CTALAÓ			•	-		
STALAĆ	between the 4th and 5th track	176+222-176+425	platform	203,00		1,60
	between the 6th and 7th track	176+270-176+378	platform	108,00	0,28	5,30
STEVANAC		NONE			r	
BRALJINA	between the 2nd and 3rd track	186+443-186+563	platform	120,00		1,60
	between the 3rd and 4th track	186+443-186+563	platform	120,00		1,60
Cerovo-Ražanj	next to railway line - left	190+320-190+370	platform	50,00	0,35	1,60
STARO TRUBAREVO	between the 1st and 2nd track	192+150-192+220	platform	70,00	0,35 0,35 0,35 0,20 0,20 0,20 0,55 0,55 0,35	1,60
DIDITO	between the 2nd and 3rd track	194+882-195+003	platform	121,00		1,60
ĐUNIS	between the 3rd and 4th track	194+882-195+003	platform	121,00		1,60
	next to right track	199+160-199+210	platform	50,00		1,60
Vitkovac	next to left track	199+160-199+210	platform	50,00		1,60
	next to right track	201+175-201+225	platform	50,00		1,60
Donji Ljubeš	8		1			
3 3	next to left track	201+175-201+225	platform	50,00		1,60
Gornji Ljubeš	next to right track	203+560-203+610	platform	50,00		1,60
Gornji Ljuoes	next to left track	203+560-203+610	platform	50,00		1,60
KORMAN	between the 2nd and 3rd track	205+565-205+675	platform	110,00	0,35	1,60
KORMAN	between 3 rd and 4 th track	205+545-205+665	platform	120,00	0,35	1,60
т : :	next to right track	208+087-208+186	platform	99,00		1,60
Trnjani	next to left track	208+087-208+186	platform	99,00		1,60
	next to 1st track	210+445-210+530	platform	85,00		5,00
ADROVAC	between the 1st and 2nd track	210+432-210+521	platform	89,00		1,60
ADNOVAC						
	between the 2nd and 3rd track	210+440-210+562	platform	122,00		1,60
ALEKSINAC	between the 2nd and 3rd track	214+067-214+277	platform	210,00		1,60
	between the 3rd and 4th track	214+067-214+277	platform	210,00		1,60
Nozrina	next to right track	217+400-217+500	platform	100,00		1,60
1.52mm	next to left track	217+400-217+500	platform	100,00		1,60
Lužane	next to right track	218+705-218+790	platform	85,00		1,60
Luzaile	next to left track	218+708-218+785	platform	77,00	0,35	1,60
T. v'	next to right track	222+062-222+164	platform	102,00		1,60
Tešica	next to left track	222+062-222+164	platform	102,00		1,60
· · · · · · · · · · · · · · · · · · ·	between the 2nd and 3rd track	224+656-224+758	platform	102,00		1,60
GREJAČ	between the 3rd and 4th track	224+656-224+708	platform	52,00	0 0,20 0 0,55 0 0,55 0 0,55 0 0,35	1,60
	next to right track	228+087-228+155	platform	68,00		1,60
G V1 ' 3 F	next to right track next to left track	228+087-228+159	•			
Supovački Most		//X+U91-//X+1 5 9	platform	68,00	0,33	1,60
Supovački Most				11000		4
	next to right track	229+306-229+416	platform	110,00	0,35 0,35 0,35 0,35 0,35 0,28 0,28 0,28 0,28 0,35 0,35 0,35 0,35 0,35 0,35 0,35 0,35	
Supovački Most Mezgraja	next to right track next to left track	229+306-229+416 229+306-229+416	platform platform	110,00	0,35 0,35	1,60
	next to right track	229+306-229+416	platform	110,00 87,00	0,35 0,35 0,35 0,35 0,35 0,35 0,35 0,35	1,60 1,60 1,60 1,60



		km position of the		I	Dimensions	S
Service point	Location	beginning and the end	Platform/arranged	Length	Height	Width
•		of platform	surface	(m)	(m)	(m)
1	2	3	4	5	6	7
TRUPALE	between the 2nd and 3rd track	234+893-234+994	platform	101,00		1,60
	between the 4th and 5th track	234+893-234+994	platform	101,00		1,60
CRVENI KRST	between the 2nd and 3rd track	240+842-240+994	platform	152,00		1,60
	next to 1st track	243+410-243+763	platform	353,00		5,80
v	between the 2nd and 3rd track	243+410-243+813	platform	403,00		8,00
NIŠ	between the 4th and 5th track	243+410-243+771	platform	361,00		8,00
	between 1b. and 1. track	243+643-243+763	platform	120,00		5,80
MEDIBONO	next to 1a. track	243+660-243+763	platform	103,00	0,40	1,60
MEĐUROVO	1	NONE	1-46	01.00	0.40	1.60
BELOTINCE Čapljinac	between the 1st and 2nd track next to railway line - left	253+906-253+987 255+443-255+493	platform platform	81,00 50,00		1,60 1,60
Malošište	next to railway line - left	257+890-257+940	platform	50,00		1,60
	between the 1st and 2nd track	261+419-261+527	platform	108,00		1,60
DOLJEVAC	between the 2nd and 3rd track	261+419-261+526	platform	107,00		1,60
	next to railway line - right	263+218-263+263	platform	45,00		1,10
Kočane	next to railway line - right	263+274-263+287	platform	13,00	(m)	1,10
	next to railway line - right	265+833-265+862	platform	29,00	Height (m) 6 0,40 0,40 0,40 0,40 0,40 0,40 0,40 0,	1,60
Pukovac	next to railway line - right	265+870-265+897	platform	27,00		1,60
BRESTOVAC	between the 2nd and 3rd track	267+906-267+971	platform	65,00		1,60
	next to railway line - left	270+819-270+844	platform	25,00		1,10
Lipovica	next to railway line - left	270+850-270+887	platform	37,00	-	1,10
PEČENJEVCE	between the 2nd and 3rd track	275+522-275+596	platform	74,00		1,60
Živkovo	next to railway line - right	278+820-278+865	platform	45,00		1,10
Priboj Leskovački	next to railway line - right	280+440-280+480	platform	40,00		1,30
VINARCI		NONE	1	- ,	- , -	,
	between the 1st and 2nd track	287+460-287+679	platform	219,00	0,40	1,60
LESKOVAC	between the 2nd and 3rd track	287+507-287+630	platform	123,00		1,60
ĐORĐEVO	1	NONE				
CDDELICA	between the 2nd and 3rd track	301+841-301+886	platform	45,00	0,40	1,60
GRDELICA	between the 3rd and 4th track	301+841-301+886	platform	45,00	0,40	1,60
Palojska Rosulja	next to railway line - left	308+614-308+629	platform	15,00	0,40	1,60
PREDEJANE	between the 1st and 2nd track	312+675-312+750	platform	75,00	0,40	1,60
DŽEP	between the 2nd and 3rd track	319+629-319+710	platform	81,00	0,40	1,60
MOMIN KAMEN	next to railway line - left	322+900-322+930	platform	30,00	0,40	1,60
Šelince		NONE	1			
VLADIČIN HAN	between the 1st and 2nd track	329+472-329+676	platform	204,00		1,60
SUVA MORAVA	next to 1st track	334+043-334+095	platform	52,00	0,40	1,60
Lepenički most		NONE				
Stubal		NONE				
PRIBOJ VRANJSKI		NONE	1.0	100.00	0.40	1.60
VRANJSKA BANJA	between the 1st and 2nd track	347+958-348+080	platform	122,00		1,60
VRANJE	between the 1st and 2nd track	354+080-354+260	platform	180,00		1,60
Nonadaria -	between the 2nd and 3rd track	354+125-354+242	platform	117,00	0,40	1,60
Neradovac	hotwoon the 1st and 2 1 to 1	NONE	nlatfar	102.00	0.40	1 40
RISTOVAC	between the 1st and 2nd track between the 2nd and 3rd track	365+666-365+768	platform	102,00		1,60
BUJANOVAC	between the 2nd and 3rd track	365+666-365+768 373+665-373+720	platform platform	102,00 55,00		1,60
Letovica	octween the 1st and 2lid track	NONE	pianoilli	22,00	0,40	1,00
	+	NONE				
BUKAREVAL						1.60
BUKAREVAC PREŠEVO	between the 1st and 2nd track		platform	101.00	0.40	L.nu
PREŠEVO	between the 1st and 2nd track 103 (Belgrade Center) - Rako	392+256-392+357	platform a - Velika Plana	101,00	0,40	1,60
	103 (Belgrade Center) - Rako	392+256-392+357 vica - Jajinci - Mala Krsn	a - Velika Plana	,		,
	103 (Belgrade Center) - Rako next to 2nd track - right	392+256-392+357 vica - Jajinci - Mala Krsn 8+460-8+786	a - Velika Plana platform	326,00	0,55	6,10
PREŠEVO	103 (Belgrade Center) - Rako	392+256-392+357 vica - Jajinci - Mala Krsn	a - Velika Plana	,	0,55 0,55	,
PREŠEVO RAKOVICA	103 (Belgrade Center) - Rako next to 2nd track - right between the 3rd and 4th track	392+256-392+357 vica - Jajinci - Mala Krsn 8+460-8+786 8+637-8+868 8+545-8+865	a - Velika Plana platform platform	326,00 231,00	0,55 0,55	6,10 6,10
PREŠEVO RAKOVICA JAJINCI	103 (Belgrade Center) - Rako next to 2nd track - right between the 3rd and 4th track between the 5th and 6th track	392+256-392+357 vica - Jajinci - Mala Krsn 8+460-8+786 8+637-8+868 8+545-8+865 NONE	a - Velika Plana platform platform platform	326,00 231,00 320,00	0,55 0,55 0,55	6,10 6,10 6,20
PREŠEVO RAKOVICA	103 (Belgrade Center) - Rako next to 2nd track - right between the 3rd and 4th track	392+256-392+357 vica - Jajinci - Mala Krsn 8+460-8+786 8+637-8+868 8+545-8+865	a - Velika Plana platform platform	326,00 231,00	0,55 0,55 0,55 0,40	6,10 6,10 6,20 1,60
PREŠEVO RAKOVICA JAJINCI BELO POTOK	next to 2nd track - right between the 3rd and 4th track between the 5th and 6th track between the 2nd and 3rd track	392+256-392+357 vica - Jajinci - Mala Krsn 8+460-8+786 8+637-8+868 8+545-8+865 NONE 16+240-16+337	a - Velika Plana platform platform platform platform	326,00 231,00 320,00 97,00	0,55 0,55 0,55 0,40 0,40	6,10 6,10 6,20
PREŠEVO RAKOVICA JAJINCI	next to 2nd track - right between the 3rd and 4th track between the 5th and 6th track between the 2nd and 3rd track between the 3rd and 4th track	392+256-392+357 vica - Jajinci - Mala Krsn 8+460-8+786 8+637-8+868 8+545-8+865 NONE 16+240-16+337 16+240-16+351	a - Velika Plana platform platform platform platform platform platform	326,00 231,00 320,00 97,00 111,00	0,55 0,55 0,55 0,55 0,40 0,40 0,40	6,10 6,10 6,20 1,60 1,60
PREŠEVO RAKOVICA JAJINCI BELO POTOK Zuce staj. ZUCE	next to 2nd track - right between the 3rd and 4th track between the 5th and 6th track between the 2nd and 3rd track between the 3rd and 4th track between the 3rd and 4th track next to railway line - right	392+256-392+357 vica - Jajinci - Mala Krsn 8+460-8+786 8+637-8+868 8+545-8+865 NONE 16+240-16+337 16+240-16+351 20+305-20+363	a - Velika Plana platform platform platform platform platform platform platform	326,00 231,00 320,00 97,00 111,00 58,00	0,55 0,55 0,55 0,55 0,40 0,40 0,40 0,40	6,10 6,10 6,20 1,60 1,60
PREŠEVO RAKOVICA JAJINCI BELO POTOK Zuce staj.	next to 2nd track - right between the 3rd and 4th track between the 5th and 6th track between the 2nd and 3rd track between the 3rd and 4th track between the 3rd and 4th track next to railway line - right between the 1st and 2nd track	392+256-392+357 vica - Jajinci - Mala Krsn 8+460-8+786 8+637-8+868 8+545-8+865 NONE 16+240-16+337 16+240-16+351 20+305-20+363 21+180-21+287	a - Velika Plana platform platform platform platform platform platform platform platform platform	326,00 231,00 320,00 97,00 111,00 58,00 107,00	0,55 0,55 0,55 0,55 0,40 0,40 0,40 0,40	6,10 6,10 6,20 1,60 1,60 1,60



Service point			km position of the		T	Dimension	S
1.1PE 2 3 3 4 5 6 7	Service point	Location		Platform/arranged			
LIPE	1			surface	_		
MALA IVANČA	1	2	3	4		` /	7
British	LIPE	between the 1st and 2nd track	31+208-31+316	platform	108,00	0,40	1,60
Brestovi	MALA IVANČA	next to 1st track	36+858-36+925	platform	67,00		
MALI POŽAREVAC	MALATVANCA	between the 1st and 2nd track	36+863-36+925	platform	62,00	0,40	
Dratanjs-Sepisin Dratanjs-Sepisin Dratanjs-Sepisin Dratanjs-Sepisin Dratanjs-Sepisin Dratanjs-Sepisin Dratanjs-Sepisin Dratanjs-Sepisin Dratanjs-Sepisin Dratanjs-Sepisin Dratanjs-Sepisin Dratanjs-Dratanjs	Brestovi	next to railway line - left	39+208-39+305	platform		(m) 6 0 0,40 0 0,55 0 0 0,55 0 0 0,55 0 0 0,55 0 0 0,50 0 0 0	
Drazanj-Sepšin next forallwy line - right 41=120-41+358 platform 105,00 0.40 1,60	MALLPOŽAREVAC					th Height (m) 6 0 0,40 0 0,55	
UMČARI		_		platform			
DMLARI	Dražanj-Šepšin	·					
Taykovaa	UMČARI						
WODANI		_					
Rolla				-			
Ralja Smederevska		_					
Between the 1st and 2nd track 69+030-69+175 platform 145,00 0.40 1.90							
MALA KRSNA	Ralja Smederevska						
Detween the 3rd and 4th track				-			
Skobalj next to railway line - left 71-981-72-015 platform 150,00 0,40 1,60	MALA KRSNA			-			
Skobalj				-			
Osipaonica staj. next to railway line - left 74+749-74+784 platform 35,00 0,40 1,60 OSIPAONICA between the lat and 2nd track 76+16-8.7c+231 platform 52,00 0,40 1,60 Lugavcina next to railway line - right 77+86-77+904 platform 37,00 0,40 1,60 No Saraorci NONE	O1 1 1					Height (m) 6 0,40 0,40 0,40 0,40 0,40 0,40 0,40 0,4	
Detween the 1st and 2nd track T6+168-76+231 platform 63,00 0,40 1,60		ž – – – – – – – – – – – – – – – – – – –					
Design	Osipaonica staj.			-			
LugavCina next to railway line - right 77+867-77+904 platform 37,00 0,40 1,30	OSIPAONICA						
NONE	τ ν.	_					
LOZOVIK-SARAORCI	<u> </u>	next to railway line - right		platform	37,00	0,40	1,30
Miloševac		hatwaan the 2nd and 2nd treat		nlatform	102.00	0.40	1.60
VELIKO ORAŠJE							
VELIKO ORAŠJE							
VELIKO ORAŠJE	KRRISE VO-TRIVO VEL		70 - 240-70 - 340	piationii	100,00	0,40	1,00
VELIKA PLANA between the 2nd and 3rd track between the 2nd and 3rd track 90+350-90+400 platform 50,00 0,40 1,60 between the 1st and 2nd track 90+289-90+430 platform 141,00 0,40 1,60 between the 3rd and 4th track 90+370-90+510 platform 140,00 0,40 1,60 between the 4th and 5th track 90+370-90+610 platform 104,00 0,40 1,60 between the 4th and 5th track 90+360-90+464 platform 104,00 0,40 1,60 between the 1st and 2nd track 90+360-90+464 platform 104,00 0,40 1,60 between the 1st and 2nd track 0+516-0+641 platform 125,00 0,20 1,60 between the 2nd and 3rd track 0+516-0+641 platform 125,00 0,30 1,60 between the 3rd and 4th track 155+081-155+184 platform 101,00 0,35 1,60 between the 4th and 5th track 155+081-155+166 platform 101,00 0,20 1,90 lostween the 4th and 5th track 34+015-35+265 n.H. platform 220,00 0,55 3,00 lostween the 5th and 6th track 35+015-35+265 n.H. platform 220,00 0,55 6,16 lostween the 4th and 5th track 32+015-35+265 n.H. platform 220,00 0,55 6,16 lostween the 4th and 5th track 32+015-35+265 n.H. platform 220,00 0,55 6,16 lostween the 4th and 5th track 32+015-35+265 n.H. platform 220,00 0,55 4,00 lostween the 1st and 2nd track 42+577 - 42+977 platform 220,00 0,55 4,00 lostween the 1st and 2nd track 65+759 - 65+979 platform 220,00 0,55 4,00 lostween the 1st and 2nd track 65+759 - 65+979 platform 220,00 0,55 4,00 lostween the 1st and 2nd track 67+79-85-979 platform 220,00 0,55 4,00 lostween the 1st and 2nd track 67+79-65-979 platform 220,00 0,55 4,00 lostween the 1st and 2nd track 67+79-65-979 platform 220,00 0,55 4,00 lostween the 1st and 2nd track 67+79-65-979 platform 220,00 0,55 4,00 lostween the 1st and 2nd track 77+835-77+887 platform 220,00 0,55 6,10 lostween the 1st and 2nd track 77+835-77+887 platform 338,00 0,4	,		94+626 50-94+658 50	nlatform	32.00	0.40	16
Detween the 1st and 2nd track 90+350-90+400 platform 50,00 0,40 1,60 between the 2nd and 3rd track 90+289-90+430 platform 141,00 0,40 1,60 between the 2nd and 4th track 90+370-90+510 platform 140,00 0,40 1,60 between the 4th and 5th track 90+360-90+464 platform 104,00 0,40 1,60	VELIKO ORASJE	_	71.020,50 71.050,50	piacionii	32,00	Height (m) 6 0,40 0,40 0,40 0,40 0,40 0,40 0,40 0,4	1,0
Detween the 2nd and 3rd track 90+289-90+430 platform 141,00 0,40 1,60 between the 3rd and 4th track 90+370-90+510 platform 104,00 0,40 1,60 between the 4th and 5th track 90+360-90+464 platform 104,00 0,40 1,60		between the 2nd and 3rd track	94+586,50-94+689,50	platform	103,00	0,40	1,6
Detween the 3rd and 4th track 90+370-90+510 platform 140,00 0,40 1,60		between the 1st and 2nd track					1,60
Detween the 1st and 3th track 90+3/0-90+3-10 platform 140,00 0,40 1,60	TIEL HZ A DI ANIA	between the 2nd and 3rd track	90+289-90+430	platform	141,00	0,40	1,60
CUPRIJA between the 1st and 2nd track 0+516-0+641 platform 125,00 0,20 1,60 between the 2nd and 3rd track 0+516-0+641 platform 125,00 0,30 1,60 between the 2nd and 3rd track 0+516-0+641 platform 125,00 0,30 1,60 between the 2nd and 4rd track 155+061-155+184 platform 103,00 0,35 1,60 between the 4th and 5th track 155+065-155+166 platform 101,00 0,20 1,90 105 (Belgrade Center) - Stara Pazova - Novi Sad- Subotica - state border - (Kelebia)	VELIKA PLANA	between the 3rd and 4th track	90+370-90+510	platform	140,00	0,40	1,60
ĆUPRIJA between the 1st and 2nd track between the 2nd and 3rd track between the 2nd and 3rd track 0+516-0+641 platform platform 125,00 0,30 1,60 PARAĆIN between the 3rd and 4th track between the 4th and 5th track between the 4th and 5th track between the 4th and 5th track between the 5th and 6th track between the 5th and 6th track between the 5th and 6th track between the 5th and 6th track between the 5th and 6th track between the 5th and 6th track between the 5th and 6th track between the 5th and 5th track betwe		between the 4th and 5th track	90+360-90+464	platform	104,00	Height (m) 6 0,40 0,40 0,40 0,40 0,40 0,40 0,40 0,4	1,60
Detween the 2nd and 3rd track D+516-0+641 Detween the 12th and 13rd track D+516-0+641 Detween the 12th and 14th track D+516-0+641 Detween the 12th and 14th track D+516-0+641 Detween the 12th and 15th track D+516-0+65-155+166 Detween the 12th and 15th track D+516-0+515+166 Detween the 12th and 15th track D+516-0+51-15+166 Detween the 12th and 15th track D+516-0+51-15+166 Detween the 12th and 15th track D+516-0+51-15+166 Detween the 15th and 15th track D+516-0+51-15+166 Detween the 15th and 15th track D+516-0+51-15+166 Detween the 15th and 15th track D+516-0+51-15+166 Detween 15th and 15th track D+516-0+51-15+166 Detween 15th and 15th track D+516-0+51-15+166 Detween 15th and 15th track D+516-0+51-15+166 Detween 15th and 15th track D+516-0+51-15+166 Detween 15th and 15th track D+516-0+51-15+166 Detween 15th and 15th track D+516-0+51-15+164 Detween 15th and 15th track D+516-0+51-15+164 Detween 15th and 15th track D+516-0+519-15+166 Detween 15th and 15th track D+516-0+519-15+166 Detween 15th and 15th track D+516-0+519-15+166 Detween 15th 15th and 15th track D+516-0+519-15+164 D+5		104 (Jagodina) – Open Lin	e Junction Ćuprija – Ćup	rija – Paraćin			
PARAĆIN	ĆUPRIIA	between the 1st and 2nd track	0+516-0+641				
Detween the 4th and 5th track 155+065-155+166 Datform 101,00 0,20 1,90	COTRIST						
STARA PAZOVA STARA PAZOVA Detween the 4th and 5th track 155+065-155+166 platform 101,00 0,20 1,90	PARAĆIN				-	0,40 0,40 0,40 0,40 0,40 0,20 0,30 0,35	/
STARA PAZOVA next to 1st track between the 5th and 6th track and 5th track between the 5th and 6th track and 5th track and 5th track between the 5th and 6th track and 5th						0,20	1,90
Detween the 5th and 6th track 35+015-35+265 n.H. Platform 250,00 0,55 6,16	10	\ 8		,		0	2
INDIJA	STARA PAZOVA			•	-		
BEŠKA							/
BEŠKA	INĐIJA						
NOVI SAD NOVI SAD				•			
SREMSKI KARLOVCI	BESKA						
Detween the 1st and 2nd track 65+759 - 65+979 platform 220,00 0,55 4,00							
Detween the 1st and 2nd track 70+603 - 70+823 platform 220,00 0,55 6,10	SREMSKI KARLOVCI			1			
Detween the 5 th and 6 th track 70+708 - 70+928 Platform 220,00 0,55 6,10							
NOVI SAD	PETROVARADIN						
Detween the 11th and 10th track 77+822-77+950 platform 128,00 0,40 3,72						Height (m) 6 0,40 0,40 0,40 0,40 0,40 0,40 0,40 0,	
NOVI SAD							
NOVI SAD				*			
between the 2nd and 4th track	NOVI SAD						
between the 12th and 1st track				•			
between the 14 th and 13 th track 78+104-78+249 platform 145,00 0,40 6,46 SAJLOVO NONE KISAČ between the 1st and 2nd track 91+349-91+414 platform 65,00 0,33 1,40 Stepanovićevo next to railway line - right 98+040-98+080 platform 40,00 0,35 1,60 ZMAJEVO between the 2nd and 3rd track 103+505-103+570 platform 65,00 0,34 1,40				•			
SAJLOVO KISAČ between the 1st and 2nd track 91+349-91+414 platform 65,00 0,33 1,40 Stepanovićevo next to railway line - right 98+040-98+080 platform 40,00 0,35 1,60 ZMAJEVO between the 2nd and 3rd track 103+505-103+570 platform 65,00 0,34 1,40					-		-
KISAČ between the 1st and 2nd track 91+349-91+414 platform 65,00 0,33 1,40 Stepanovićevo next to railway line - right 98+040-98+080 platform 40,00 0,35 1,60 ZMAJEVO between the 2nd and 3rd track 103+505-103+570 platform 65,00 0,34 1,40	SAJLOVO				- ,* *	, *	-, -
Stepanovićevo next to railway line - right 98+040-98+080 platform 40,00 0,35 1,60 ZMAJEVO between the 2nd and 3rd track 103+505-103+570 platform 65,00 0,34 1,40		between the 1st and 2nd track		platform	65,00	0,33	1,40
ZMAJEVO between the 2nd and 3rd track 103+505-103+570 platform 65,00 0,34 1,40	Stepanovićevo		98+040-98+080			0,35	
VRBAS between the 2nd and 3rd track 116+702-116+770,30 platform 68,00 0,35 1,40		between the 2nd and 3rd track	103+505-103+570	platform	65,00	0,34	1,40
	VRBAS	between the 2nd and 3rd track	116+702-116+770,30	platform	68,00	0,35	1,40



	1	km position of the		T	Dimensions	
Service point	Location	beginning and the end	Platform/arranged	Length	Height	Width
1		of platform	surface	(m)	(m)	(m)
1	2	3	4	5	6	7
	between the 3rd and 4th track	116+702-116+770,30	platform	68,00	0,35	1,40
LOVĆENAC	between the 2nd and 3rd track	128+098-128+158	platform	60,00	0,19	1,90
Mali Iđoš		NONE				
MALI IĐOŠ POLJE		NONE	, ,			
BAČKA TOPOLA	between the 1st and 2nd track	144+096-144+248	platform		0,15/0,40	1,60
	between the 2nd and 3rd track	144+093-144+241	platform	148,00	0,25	1,60
Mali Beograd		NONE	1 1 2			
ŽEDNIK	between the 2nd and 3rd track	157+792-157+862	platform	70,00	0,20	1,90
Verušić	next to railway line - left	162+950-162+985	platform	35,00	0,30	1,60
NAUMOVIĆEVO	between the 1st and 2nd track	166+144-166+214	platform	70,00	0,30	1,60
Aleksandrovo predgrađe	next to railway line - right	171+938-171+983	arranged surface	45,00	0,05	0,60
	between the 1st and 2nd track between the 1st and 2nd track	176+360-176+414	arranged surface	54,00	0,05	1,70
CLIDOTICA		176+414-176+487 176+487-176+838	platform	73,00 351,00	0,25 0,05	1,60
SUBOTICA	between the 1st and 2nd track		arranged surface arranged surface	516,00		1,70 1,70
	between the 3rd and 4th track	176+322-176+838 176+335-176+573			0,05	1,70
		GRAD - state border -(Di	arranged surface	238,00	0,05	1,70
	next to 1st track	243+410-243+763	platform	353,00	0,40	5,80
	between the 2nd and 3rd track	243+410-243+703	platform	403,00	0,40	8,00
NIŠ	between the 4th and 5th track	243+410-243+771	platform	361,00	0,40	8,00
NIS	between 1b and 1st track	243+410-243+771	platform	120,00	0,40	5,80
	next to 1a. track	243+660-243+763	platform	103,00	0,40	1,60
	next to railway line - left	1+669-1+769	platform	100,00	0,40	1,60
Palilulska rampa	next to railway line - left	1+809-1+875	platform	66,00	0,40	1,60
Vojna Bolnica	next to failway fine - left	NONE	piationii	00,00	0,40	1,00
ĆELE KULA	between the 2nd and 3rd track	5+422-5+502	platform	80,00	0,40	1,60
EI NIŠ	between the 2nd and 3rd track	NONE	piationii	00,00	0,10	1,00
NIŠKA BANJA	between the 2nd and 3rd track	10+450-10+558	platform	108,00	0,40	1,60
	next to railway line - right	14+712-14+731	platform	19,00	0,40	1,60
Prosek	next to railway line - right	14+740-14+770	platform	30,00	0,40	1,60
SIĆEVO	none to run way mile right	NONE	piwieiii	20,00	0,.0	
OSTROVICA	between the 1st and 2nd track	22+475-22+529	platform	54,00	0,40	1,60
Majdan Ostrovica		NONE	F	,	.,	
Radov Dol	next to railway line - left	29+494-29+520	platform	26,00	0,40	1,60
DOLAC	between the 2nd and 3rd track	31+640-31+739	platform	79,00	0,40	1,60
Crveni Breg	next to railway line - left	34+262-34+292	platform	30,00	0,40	1,60
CRVENA REKA	between the 2nd and 3rd track	36+393-36+451	platform	58,00	0,40	1,60
Belanovac	next to railway line - left	39+691-39+761	platform	70,00	0,40	1,60
BELA PALANKA	between the 2nd and 3rd track	44+907-44+977	platform	70,00	0,40	1,60
Crkvica		NONE				
ČIFLIK		NONE				
Sinjac		NONE				
Đurđevo polje		NONE				
Crvenčevo		NONE				
STANIČENJE		NONE				
Sopot		NONE				
PIROT	between the 1st and 2nd track	72+901-72+989	platform	87,00	0,40	1,60
	between the 2nd and 3rd track	72+868-73+021	platform	153,00	0,40	1,60
Božurat		NONE				
Veliki Jovanovac		NONE				
SUKOVO		NONE	1 2		0.15	
Činiglavci	next to railway line - left	90+465-90+471	platform	6,00	0,40	1,60
<u>-</u>	next to railway line - left	90+485-90+491	platform	6,00	0,40	1,60
Srećkovac		NONE	10	1.41.00	0.40	2.50
DIMITROVGRAD	next to 14th track	97+126-97+267	platform	141,00	0,40	2,50
	between the 1st and 2nd track	97+316-97+717	platform	401,00	0,40	3,20
107	Belgrade Center- Pančevo Main	0+120-0+00-0+300	r - (Stamora Morav platform	420,00	0.55	10.00
	next to 3rd track				0,55	10,00
BELGRADE CENTER	between the 4th and 5th track between the 6th and 7th track	0+155-0+00-0+300 0+155-0+00-0+300	platform platform	455,00 455,00	0,55 0,55	10,00
DELUKADE CENTEK	between the 8th and 9th track	0+155-0+00-0+300		455,00	0,55	10,00
1	next to 10th track	0+120-0+00-0+300	platform		0,55	
	next to four track	U+12U-U+UU-U+3UU	platform	420,00	0,33	7,00



Service point	Location	km position of the beginning and the end	Platform/arranged surface	Length	Dimensions Height	Width
1	2	of platform	4	(m) 5	(m) 6	(m) 7
1	between the tracks		·		-	•
V # # 1-	(next to left Banat track)	1+123-1+215	platform	92,00	0,55	7,00
Karađorđev park	between the tracks	1+222-1+314	platform	92,00	0,55	7,00
	(next to right Banat track)		piationii	72,00	0,55	7,00
	between the tracks	2+754,13-2+829,13 (chainage along the left) 2+850,52-2+925,52 (chainage along the right)	central platform	75,00	0,95	18,60
	between the tracks (next to right Banat track)	2+785,52-2+850,52	lateral platform towards the Center	65,00	0,95	3,50
Vukov spomenik	between the tracks (next to right Banat track)	2+925,52-3+010,52	lateral platform towards the bridge	85,00	0,95	3,50
	between the tracks (next to left Banat track)	2+689,13-2+754,13	lateral platform towards the Center	65,00	0,95	3,50
	between the tracks (next to left Banat track)	2+829,13-2+914,13	lateral platform towards the bridge	85,00		3,50
	next to 1st track	4+590-4+741	platform	151,00	0,90	4,94
PANČEVAČKI MOST	next to 2nd track	4+694-4+845	platform	151,00	0,90	4,94
TAINCE VACINI MOST	next to railway line - right	10+500-10+600	Danube platform	100,00	0,35	1,60
Krnjača most	Between the left and right track	7+003,50-7+223,50	platform	220,00	0,60	7,00
KRNJAČA	next to 4th track	8+165,06-8+385,06	platform	220,00	0,55	3,00
1210 011011	next to 1st track	8+182,24-8+402,24	platform	220,00	0,55	3,00
Sebeš	next to left Banat track	9+975,05-10+085,05	platform	110,00	0,60	3,10 3,10
	next to right Banat track next to 1st track	9+975,05-10+085,05 12+537,60-12+757,60	platform platform	220,00	0,55	4,00
OVČA	between the 4th and 5th track	12+537,60-12+757,60	platform	220,00	0,55	6,10
	between the 1st and 2nd track	15+913-16+033	platform	120,00	0,40	1,60
PANČEVO MAIN	between the 1st and 2nd track	16+090-16+210	platform	120,00	0,40	1,60
STATION	between the 2nd and 3rd track	15+913-16+210	platform	297,00	0,40	1,60
	between the 3rd and 4th track	15+987-16+137	platform	150,00	0,40	1,60
, ,	next to 1st track	18+131-18+223	station plateau	92,00	0,40	1,60
PANČEVO VAROŠ	between the 1st and 2nd track	18+105-18+345	platform	240,00	0,40	1,60
DANIA TOWO NO VO GET O	between the 2nd and 3rd track	18+100-18+364	platform	264,00	0,40	1,60
BANATSKO NOVO SELO	between the 2nd and 3rd track	33+981-34+035	arranged surface	54,00	0,30	0,50
VLADIMIROVAC	between the 1st and 2nd track	45+806-45+906	arranged surface	100,00	0,00	1,30
	between the 2nd and 3rd track between the 1st and 2nd track	45+806-45+906 53+503-53+603	arranged surface	100,00	0,00	1,30 1,30
ALIBUNAR	between the 2nd and 3rd track	53+503-53+603	arranged surface	100,00	0,00	1,30
BANATSKI KARLOVAC	between the 2nd and 3rd track	33 13 03 33 10 03	urranged sarrace	100,00	0,00	1,50
Nikolinci		NONE				
ULJMA	between the 2nd and 3rd track					
Vlajkovac		NONE			·	
VRŠAC	between the 1st and 2nd track	82+807,5-82+902,5	platform	95,00	0,40	1,60
	between the 2nd and 3rd track	82+807,5-82+902,5	platform	95,00	0,40	1,60
1	08 (Belgrade Center) - Resnik -			-		
<u></u>	next to 1st track	14+080-14+240	arranged surface	160,00	0,55	4,00
RESNIK	between the 1st and 2nd track	14+080-14+240	platform	160,00	0,35	1,55
DEL A DELLA	between the 3rd and 4th track	13+943-14+238	platform	295,00	0,55	6,20
BELA REKA	between the 1st and 2nd track next to railway line - left	7+538-7+648	platform	110,00	0,35	1,60
Nenadovac BARAJEVO	between the 2nd and 3rd track	12+077-12+127 15+654-15+764	platform platform	50,00 110,00	0,35 0,35	1,60
Barajevo Centar	next to railway line - left	17+895-18+003	platform	108,00	0,35	1,60
VELIKI BORAK	between the 1st and 2nd track	23+039-23+151	platform	112,00	0,35	1,60
Leskovac Kolubarski	next to railway line - right	27+720-27+770	platform	50,00	0,35	1,60
STEPOJEVAC	between the 2nd and 3rd track	30+572-30+682	platform	110,00	0,35	1,60
	between the 2nd and 3rd track	37+150-37+300	platform	150,00	0,35	1,60
VREOCI	between the 3rd and 4th track	37+150-37+300	platform	150,00	0,35	1,60



		km position of the		Т	Dimensions	2
Service point	Location	beginning and the end	Platform/arranged	Length	Height	Width
Solving point	2000000	of platform	surface	(m)	(m)	(m)
1	2	3	4	5	6	7
LAZAREVAC	between the 1st and 2nd track	45+311-45+462	platform	151,00	0,35	1,60
LAZAREVAC	between the 2nd and 3rd track	45+311-45+462	platform	151,00	0,35	1,60
LAJKOVAC	between the 1st and 2nd track	52+547-52+697	platform	150,00	0,40	1,60
LAJKOVAC	between the 2nd and 3rd track	52+527-52+697	platform	170,00	0,35	1,60
SLOVAC	between the 1st and 2nd track	58+899-59+052	platform	153,00	0,35	1,60
	between the 2nd and 3rd track	58+899-59+052	platform	153,00	0,35	1,60
Mlađevo	next to railway line - right	63+958-64+035	platform	77,00	0,35	1,60
DIVCI	between the 1st and 2nd track	67+043-67+213	platform	170,00	0,35	1,60
7 1 77 1 1 1	between the 2nd and 3rd track	67+043-67+213	platform	170,00	0,35	1,60
Lukavac Kolubarski	next to railway line - right	69+165-69+265	platform	100,00	0,35	1,60
Iverak	next to railway line - right	72+725-72+825	platform platform	100,00	0,35	1,60 5,4
VALJEVO	next to 1st track between the 2nd and 3rd track	77+550-77+851 77+562-77+863	platform	301,00	0,35 0,35	7,55
VALJEVSKI GRADAC	next to railway line - right	84+560-84+610	platform	50,00	0,35	1,60
Leskovice	next to railway line - right	91+605-91+655	platform	50,00	0,35	1,60
LASTRA	between the 2nd and 3rd track	93+985-94+131	platform	146,00	0,35	1,60
SAMARI	between the 2nd and 3rd track	103+118-103+168	platform	50,00	0,33	1,60
Drenovački Kik	next to railway line - right	107+700-107+750	platform	50,00	0,40	1,60
RAŽANA	between the 3rd and 4th track	111+284-111+430	platform	146,00	0,35	1,60
	between the 3rd and 4th track	118+748-118+948	platform	200,00	0,40	1,60
KOSJERIĆ	between the 4th and 5th track	118+748-118+948	platform	200,00	0,40	1,60
Tubići	next to railway line - left	123+446-123+496	platform	50,00	0,35	1,60
KALENIĆI	between the 3rd and 4th track	129+772-129+918	platform	146,00	0,35	1,60
Otanj	next to railway line - right	133+600-133+710	platform	110,00	0,40	1,50
Glumač	next to railway line - right	135+807-135+863	platform	56,00	0,40	1,60
POŽEGA	next to 1st track	140+720-140+975	platform	255,00	0,45	10,00
TOZEGA	between the 2nd and 3rd track	146+675-140+984	platform	309,00	0,45	6,20
Rasna	next to railway line - right	145+618-145+650	platform	32,00	0,40	1,00
UZIĆI	between the 1st and 2nd track	149+125-149+255	platform	129,00	0,40	1,60
	between the 2nd and 3rd track	149+255-149+389	platform	134,00	0,40	1,60
Zlakusa	next to railway line - right	151+536-151+566	platform	30,00	0,40	1,60
Bukovička Rampa	next to railway line - right	154+141-154+161	platform	20,00	0,40	1,60
SEVOJNO	between the 1st and 2nd track	156+882-157+082	platform platform	200,00	0,40	1,60
UŽICE FREIGHT STATION	between the 2nd and 3rd track	161+795-161+995 161+813-161+953	platform	140,00	0,40	1,60 1,60
	next to 1st track	163+645-163+900	platform	255,00	0,40	3,00
UŽICE	between the 2nd and 3rd track	163+626-163+881	platform	255,00	0,40	5,10
STAPARI	between the 1st and 2nd track	170+590-170+710	platform	120,00	0,40	1,60
	next to railway line - left	173+412-173+425	platform	13	0,40	1,60
Ristanovića Polje	next to railway line - right	173+426-173+464	platform	38	0,40	1,60
Tripkova	next to railway line - right	176+045-176+095	platform	50	0,40	1,60
SUŠICA	between the 2nd and 3rd track	178+251-178+371	platform	120,00	0,40	1,60
	next to 1st track	185+181-185+291	platform	110,00	0,40	5,50
BRANEŠCI	between the 1st and 2nd track	185+181-185+291	platform	110,00	0,40	1,60
	between the 2nd and 3rd track	185+181-185+291	platform	110,00	0,40	1,60
ZLATIBOR	between the 2nd and 3rd track	193+234-193+404	platform	170,00	0,40	1,60
Ribnica Zlatiborska	next to railway line - left	200+350-200+400	platform	50,00	0,40	1,60
JABLANICA	between the 3rd and 4th track	204-405-204+550	platform	145,00	0,40	1,60
Goleš	next to railway line - right	211+590-211+616	platform	26,00	0,40	1,00
ŠTRPCI	between the 2nd and 3rd track	214-755-214-900	platform	145,00	0,40	1,60
Rača	next to railway line - right	219+515-219+536	platform	21,00	0,40	1,00
PRIBOJ	between the 2nd and 3rd track	225+227-225+490	platform	263,00	0,50	5,10
	between the 6th and 7th track	225+137-225+237	platform	100,00	0,50	3,00
Poljice	next to railway line - right	228+110-228+190	platform	80,00	0,40	1,60
Pribojska Banja BISTRICA NA LIMU	next to railway line - right between the 2nd and 3rd track	232+867-232+899	platform platform	32,00 144,00	0,40 0,40	1,00
Džurovo	next to railway line - right	241+208-241+352 246+300-246+328	platform	28,00	0,40	1,00
	next to failway fine - right	252+396-252+705	platform	309,00	0,40	4,60
PRIJEPOLJE	between the 2nd and 3rd track	252+396-252+705	platform	309,00	0,40	7,00
PRIJEPOLJE FREIGHT	between the 2nd and 3rd track	255+789-255+982	platform	187,00	0,35	1,60
STATION	between the 3rd and 4th track	255+789-255+982	platform	187,00	0,35	1,60
Velika Župa	next to railway line - right	259+605-259+624	platform	19,00	0,40	1,00
F	, , , , , , , , , , , , , , , , , , , ,			- ,- =	, -	, - =



		km position of the		I	Dimensions	<u> </u>
Service point	Location	beginning and the end	Platform/arranged	Length	Height	Width
1		of platform	surface	(m)	(m)	(m)
1	2	3	4	5	6	7
LUČICE	between the 2nd and 3rd track	264+581-264+714	platform	133,00	0,35	1,60
BRODAREVO	between the 2nd and 3rd track	273+255-273+404	platform	149,00	0,30	1,60
VRBNICA	between the 1st and 2nd track	285+205-285+255	platform	50,00	0,30	1,60
	between the 2nd and 3rd track	285+112-285+256	platform	144,00	0,30	1,60
109 La	povo - Kraljevo - Lešak - Kosovo				T	
	between the 2nd and 3rd track	109+560-109+680	platform	120,00	0,35	1,60
LAPOVO	between the 3rd and 4th track	109+560-109+680	platform	120,00	0,35	1,60
D. TO ŠDI.	next to 1st track	109+460-109+510	platform	50,00	0,35	1,60
BATOČINA	between the 1st and 2nd track	3+374,70-3+421,90	platform	47,20	0,12	1,30
Gradac BADNJEVAC	left side	8+243,40-8+292,90	platform	49,50	0,30	1,05
Resnik Kragujevački	between the 2nd and 3rd track	12+264,50-12+311,50 NONE	platform	47,00	0,14	1,80
Milatovac	right side	18+206,90-18+253,70	platform	46,80	0,33	1,10
Cvetojevac	right side	20+381-422,20	platform	41,20	0,33	1,10
JOVANOVAC	between the 2nd and 3rd track	22+308-22+352	platform	44,00	0,23	1,75
	between the 1st and 2nd track	28+726-28+918,70	platform	192,70	0,24	1,20
KRAGUJEVAC	between the 2nd and 3rd track	28+752-28+907	platform	155,00	0,24	1,80
Zavod	right side	31+280,50-31+288,25	platform	7,75	0,10	0,50
GROŠNICA	between the 1st and 2nd track	34+062,80-34+104,30	platform	41,50	0,22	1,50
DRAGOBRAĆA	between the 1st and 2nd track	39+529-39+565	platform	36,00	0,20	1,20
Vučkovica	right side	44+513-44+538	platform	25,00	0,30	1,20
KNIĆ	between the 1st and 2nd track	47+560-47+607	platform	47,00	0,30	1,40
GRUŽA	between the 1st and 2nd track	53+458-53+505,5	platform	47,50	0,22	1,40
GUBEREVAC	between the 1st and 2nd track	60+567-60+614	platform	47,00	0,20	1,55
Tomića Brdo	right side	64+795-64+822,50	platform	27,50	0,35	1,00
VITKOVAC	between the 1st and 2nd track	66+309-66+353	platform	44,00	0,25	1,25
Milavčići	left side	70+141,80-70+172,80	platform	31,00	0,35	1,40
VITANOVAC	between the 1st and 2nd track	73+904,30-73+948,70	platform	44,40	0,22	1,40
Šumarice	left side	79+111-79+128,4	platform	17,40	0,25	0,50
Sirča	right side	82+006-82+069	platform	63,00	0,35	1,90
KRALJEVO	between the 1st and 2nd track	84+649-84+733	platform	84,00	0,33	1,60
	between the 2nd and 3rd track	84+649-84+748	platform	99,00	0,33	1,60
MATARUŠKA BANJA	between the 2nd and 3rd track left side	93+895-93+940	platform	45,00	0.20	1,80
Progorelica BOGUTOVAČKA BANJA	between the 1st and 2nd track	97+352-97+386 100+868-100+919	platform platform	34,00 51,00	0,25	1,40 1,80
DOBRE STRANE	between the 1st and 2nd track	NONE	piatioriii	31,00	0,22	1,00
POLUMIR	between the 1st and 2nd track	118+291-118+344	platform	53,00	0,26	1,50
Pusto Polje	left side	123+555-123+589	platform	34,00	0,25	1,00
UŠĆE	between the 1st and 2nd track	127+223-127+281	platform	58,00	0,34	1,50
Lozno	right side	132+832-132+866	platform	34,00	0,22	0,50
JOŠANIČKA BANJA	between the 1st and 2nd track	136+102-136+152	platform	50,00	0,25	1,45
Piskanja	left side	138+842-138+884	platform	42,00	0,21	1,00
BRVENIK	between the 1st and 2nd track	143+481-143+528	platform	47,00	0,32	1,50
Rvati	left side	148+258-148+304	platform	46,00	0,22	1,00
RAŠKA	between the 1st and 2nd track	152+236-152+353	platform	117,00	0,32	1,80
Kaznovići	left side	157+700-157+740	platform	40,00	0,23	1,00
RUDNICA	between the 1st and 2nd track	161+970-162+022	platform	48,00	0,25	1,55
Donje Jarinje		NONE				
Jerina	next to railway line - left	168+865-168+935	arranged surface	70,00	0,20	1,60
LEŠAK	between the 1st and 2nd track	172+294-172+394	platform	100,00	0,35	1,60
	between the 2nd and 3rd track	172+294-172+394	platform	100,00	0,35	1,60
Dren		NONE		40000		
LEPOSAVIĆ	between the 1st and 2nd track	182+675-182+775	platform	100,00	0,35	1,60
Pridvorica		NONE	1 .0	40.00	0.25	1.00
Sočanica	next to railway line - left	190+000-190+040	platform	40,00	0,35	1,00
IBARSKA SLATINA		NONE				
Plandište		NONE				
BANJSKA Valač	between the 1st and 2nd track	NONE 208+170-208+230	arranged surface	60,00	0.25	1.00
valac ZVEČAN	next to 1st track	210+900-211+000	platform	100,00	0,35 0,35	1,00 1,60
Kosovska Mitrovica Sever	next to 1st track next to railway line - left	210+900-211+000	platform	50,00	0,35	1,60
ROSOVSKA WITHOVICA SEVEI		gojevo - state border - (Ei		50,00	0,55	1,00
BOGOJEVO	110 Subolica - Do	NONE	·uutj			
20001210	1	HONE				



	T	km position of the	Platform/arranged		Dimensions	
Service point	Location	beginning and the end of platform	surface	Length (m)	Height (m)	Width (m)
1	2	3	4	5	6	7
SONTA	2	NONE			Ü	,
	between the 1st and 2nd track	58+619-58+649	platform	30,00	0,30	1,55
PRIGREVICA	between the 2nd and 3rd track	58+619-58+649	platform	30,00	0,30	1,57
BUKOVAČKI SALAŠI		NONE				
	between the 1st and 2nd track	73+417-73+477	platform	60,00	0,31	1,61
	between the 1st and 2nd track	73+584-73+612	arranged surface	28,00	0,05	1,50
SOMBOR	between the 1st and 2nd track	73+673-73+823	arranged surface	150,00	0,05	1,50
SolviBolt	between the 2nd and 3rd track	73+417-73+477	platform	60,00	0,38	1,61
	between the 2nd and 3rd track	73+584-73+612	arranged surface	28,00	0,05	1,50
OVETOZAD MI ETIĆ	between the 3rd and 4th track	73+584-73+701	arranged surface	117,00	0,05	1,50
SVETOZAR MILETIĆ	between the 2nd and 3rd track	83+340-83+397	platform	56,70	0,30	1,68
ALEKSA ŠANTIĆ BAJMOK	between the 2nd and 3rd track between the 2nd and 3rd track	97+500-97-556 105+138-105+193	platform platform	55,61	0,24	1,90 1,90
Skenderevo	between the 2nd and 3rd track	NONE	piatioriii	55,00	0,23	1,90
TAVANKUT	between the 2nd and 3rd track	115+350-115+400	platform	50,00	0,30	1,80
Ljutovo	between the 2nd and 3rd track	NONE	piationii	30,00	0,50	1,00
ŠEBEŠIĆ		NONE				
Subotica predgrađe	next to railway line - left	128+229-128+270	platform	41,00	0,25	1,60
1	between the 1st and 2nd track	176+360-176+414	arranged surface	54,00	0,05	1,70
	between the 1st and 2nd track	176+414-176+487	platform	73,00	0,25	1,60
SUBOTICA	between the 1st and 2nd track	176+487-176+838	arranged surface	351,00	0,05	1,70
	between the 2nd and 3rd track	176+322-176+838	arranged surface	516,00	0,05	1,70
	between the 3rd and 4th track	176+335-176+573	arranged surface	238,00	0,05	1,70
	111 Belgrade Marshallin	g Yard "A" – Ostružnica	- Batajnica			
BELGRADE		NONE				
MARSHALLING YARD A						
OSTRUŽNICA SURČIN		NONE NONE				
SURCIN	between the 1st and 2nd track	20+510 - 20+768	platform	258,00	0,35	1,90
	between the 2nd and 3rd track	20+543 - 20+722	platform	179,00	0,35	1,90
BATAJNICA	between the 3rd and 4th track	20+598 - 20+722	platform	124,00	0,35	1,60
	between the 4th and 5th track	20+598 - 20+722	platform	124,00	0,35	1,60
	112 Belgrade Mar	shalling Yard "B" - Ostru				
BELGRADE		NONE				
MARSHALLING YARD B		NONE				
OSTRUŽNICA		NONE				
	de Marshalling Yard,,A" - Open	line junction "B" - Open	line junction "K/K	1" - Resnil	K	
BELGRADE		NONE				
MARSHALLING YARD A	mayet to 1 at two als		amon and aumfann	160.00	0.55	4.00
RESNIK	next to 1st track between the 1st and 2nd track	14+080-14+240 14+080-14+240	arranged surface	160,00 160,00	0,55 0,35	4,00 1,55
RESNIK	between the 3rd and 4th track	13+943-14+238	platform	295,00	0,55	6,20
	114 Ostružnica - Open line ju			273,00	0,55	0,20
OSTRUŽNICA	114 Osti uzinca - Općii inic ju	NONE	inction "ix/ixi			
	ade Marshalling Yard,,B" - Ope		line junction "A"	- (Resnik)		
BELGRADE	3 3	•	,,,. 1	,		
MARSHALLING YARD B		NONE				
	116 (Belgrade Marshalling Yaı	d,,B") - Open line junctio	on "R" - Rakovica			
	next to 2nd track - right	8+460-8+786	platform	326,00	0,55	6,10
RAKOVICA	between the 3rd and 4th track	8+637-8+868	platform	231,00	0,55	6,10
	between the 5th and 6th track	8+545-8+865	platform	320,00	0,55	6,20
DET 02 : 2 =	117 Belgrade Marshalling Yai	d,,A" - Open line junction	n "T" - Rakovica			
BELGRADE MARCHALLING YARD A		NONE				
MARSHALLING YARD A	nove to 2md two als	0±160 0±706	nlatfa	226.00	0.55	<i>(</i> 10
DAMONICA	next to 2nd track - right	8+460-8+786 8+637-8+868	platform	326,00	0,55	6,10
RAKOVICA	between the 3rd and 4th track between the 5th and 6th track	8+545-8+865	platform platform	231,00 320,00	0,55 0,55	6,10
	118 Belgrade Marshalling Yar			320,00	0,55	0,20
BELGRADE	110 Deigraue Warshaming Tar	· · · · · · · · · · · · · · · · · · ·	"1 - (Nakovica)			
MARSHALLING YARD B		NONE				
	one of Open line junction "K/K1	": (Open line iunctionB	") - Open line iunci	tion "K" -	Open line	junction
		K1" - (Jajinci)	, - <u>1</u> june	- 77	r	J
	čevački most)-Open line junction	. IZ	Part Carlo Dal			(199)



		km position of the		I	Dimension	ıs
Service point	Location	beginning and the end	Platform/arranged	Length	Height	Width
1		of platform	surface	(m)	(m)	(m)
1	2	3	4	5	6	7
	between the tracks	1+123-1+215	platform	92,00	0,55	7,00
Karađorđev park	(next to left Banat track)	1+123-1+213	plationii	72,00	0,55	7,00
Turadorde, park	between the tracks	1+222-1+314	platform	92,00	0,55	7,00
	(next to right Banat track)	(. 1 ".	1	- ,	- ,	.,
	between the 1st and 2nd track	Inđija - Golubinci 42+840-42+970	#latfamm	120.00	0.40	1,60
INĐIJA	between the 2nd and 3rd track	42+783-42+928	platform platform	130,00	0,40	1,60
	between the 2nd and 3rd track	45+767,00-45+914,00	platform	147,00	0,35	1,60
GOLUBINCI	between the 3rd and 4th track	45+767,00-45+914,00	platform	147,00	0,35	1,60
	122 Novi Sad- Novi Sad Mars			147,00	0,55	1,00
	next to 11th track	77+836-77+950	platform	114,00	0,40	3,00
	between the 11th and 10th track	77+822-77+950	platform	128,00	0,40	3,72
	between the 10th and 1st track	77+835-77+887	platform	52,00	0,40	4,20
NOVI SAD	next to 1st track	77+835-78+250	platform	415,00	0,40	4,20-8,90
110 11212	between the 2nd and 4th track	77+843-78+181	platform	338,00	0,40	8,75
	between the 12thand 1st track	78+104-78+250	platform	146,00	0,40	8,90
	between the 14 th and 13 th track	78+104-78+249	platform	145,00	0.40	6,46
NOVI SAD				- ,	, .	
MARSHALLING YARD		NONE				
123 by-pass track	of Mala Krsna station: (Kolari)	- separation switch No1 - s	separation switch N	028 - (Osi	paonica)	
v 1	124 Open line junction Lapovo					
Lamaria Vanaš	next to right track	106+250-106+310	platform	60,00	0,35	1,60
Lapovo Varoš	next to left track	106+250-106+310	platform	60,00	0,35	1,60
LAPOVO MARSHALLING YARD		NONE				
TAND	between the 2nd and 3rd track	109+560-109+680	platform	120,00	0,35	1,60
LAPOVO	between the 3 rd and 4 th track	109+560-109+680	platform	120,00	0,35	1,60
LAIOVO	next to 1st track	109+460-109+510	platform	50,00	0,35	1,60
		Marshalling Yard - Među	<u> </u>	30,00	0,55	1,00
	between the 2nd and 3rd track	234+893-234+994	platform	101,00	0,40	1,60
TRUPALE	between the 4th and 5th track	234+893-234+994	platform	101,00	0,40	1,60
NIŠ MARSHALLING	next to 1a. track	238+216-238+289	platform	73,00	0,40	2,20
YARD	next to far truck	230 - 210 230 - 209	piatroim	73,00	0,10	2,20
MEĐUROVO		NONE				
	126 Crveni K	rst - Niš Marshalling yard	i			
CRVENI KRST	between the 2nd and 3rd track	240+842-240+994	platform	152,00	1,60	0,40
NIŠ MARSHALLING	next to 1a. track	238+216-238+289	platform	73,00	0,40	2,20
YARD			•			
	127 Niš - Open line jun	ction Most - (Niš Marshal				
	next to 1st track	243+410-243+763	platform	353,00	0,40	5,80
	between the 2nd and 3rd track	243+410-243+813	platform	403,00	0,40	8,00
NIŠ	between the 4th and 5th track	243+410-243+771	platform	361,00	0,40	8,00
	between the 1b. and 1st track	243+643-243+763	platform	120,00	0,40	5,80
	next to 1a. track	243+660-243+763	platform	103,00	0,40	1,60
128 Connecting t	rack of Niš station: (Crveni Krst		- separation switch	No4 - (Cel	e Kula)	
		AL RAILWAY LINES				
		orgoš - state border - (Rös				
	between the 1st and 2nd track	176+360-176+414	arranged surface	54,00	0,05	1,70
	between the 1st and 2nd track	176+414-176+487	platform	73,00	0,25	1,60
SUBOTICA	between the 1st and 2nd track	176+487-176+838	arranged surface	351,00	0,05	1,70
	between the 2nd and 3rd track	176+322-176+838	arranged surface	516,00	0,05	1,70
	between the 3rd and 4th track	176+335-176+573	arranged surface	238,00	0,05	1,70
JAVNA SKLADIŠTA	next to railway line - left	2+275-2+385	platform	110,00	0,55	3,00
PALIĆ	next to 2 nd track (right)	7+575-7+685	platform	110,00	0,55	3,00
	next to 4th track	7+575-7+685	platform	110,00	0,55	8,00
Hajdukovo	next to railway line - right	12+002-12+112	platform	110,00	0,55	3,00
BAČKI VINOGRADI	next to 2 nd track (right)	15+360-15+470	platform	110,00	0,55	3,00
HORGOŠ	next to 2 nd track (right)	23+995-24+105	platform	110,00	0,55	4,00
	next to 5th track	23+995-24+105	platform	110,00	0,55	4,00
DANGERIO ACCES	202 Pančevo Main St Zren		· · · · · · · · · · · · · · · · · · ·	100	0.40	1.60
PANČEVO MAIN	between the 1st and 2nd track	15+913-16+033	platform	120	0,40	1,60
STATION	between the 1st and 2nd track	16+090-16+210	platform	120	0,40	1,60



	<u> </u>	1		Т	Dimension	
G	T4:	km position of the	Platform/arranged			Width
Service point	Location	beginning and the end	surface	Length	Height	
	1	of platform	4	(m)	(m)	(m)
<u> </u>	2	3	4	5	6	7
	between the 2nd and 3rd track	15+913-16+210	platform	297	0,40	1,60
	between the 3rd and 4th track	15+987-16+137	platform	150	0,40	1,60
JABUKA		NONE			,	
KAČAREVO	between the 1st and 2nd track	26+784-26+834	platform	50	1,6	0,35
CREPAJA		NONE				
DEBELJAČA		NONE				
KOVAČICA	between the 1st and 2nd track		NONE			
UZDIN		NONE				
	between the 1st and 2nd track	61+920-61+970	platform	50	1,6	0,35
TOMAŠEVAC	between the 2nd and 3rd track	61+920-61+970	platform	50	1,6	0,35
ORLOVAT STAJALIŠTE	between the 1st and 2nd track	64+025-64+075	platform	50	1,6	0,35
LUKIĆEVO	between the 1st and 2nd track	NONE	piationii	30	1,0	0,55
ZRENJANIN FABRIKA		NONE				
ZRENJANIN FABRIKA	1 1 1 1		1.40	71	1.2	0.55
GD	next to 1st track	88+705-88+776	platform	71	1,3	0,55
ZRENJANIN	between the 1st and 2nd track		NONE			
	between the 2nd and 3rd track		NONE			
ELEMIR		NONE				
MELENCI	between the 2nd and 3rd track		NONE			
KUMANE		NONE				
NOVI BEČEJ		NONE				
BANATSKO MILOŠEVO		NONE				
POLJE		NONE				
	next to 1st track		NONE			
BANATSKO MILOŠEVO	between the 1st and 2nd track		NONE			
Brit Wilsite WilesEve	between the 2nd and 3rd track		NONE			
Derić	between the 2nd and 3rd track	NONE	NONE			
Belle	next to 1st track	160+030-160+166	platform	136,00	0,19	3,30-4,40
KIKINDA	between the 1st and 2nd track	160+064-160+190	arranged surface	126,00	0,19	1,50
DANIATORO VELUZO	between the 1st and 2nd track	160+064-160+190	arranged surface	120,00	0,00	1,50
BANATSKO VELIKO		NONE				
SELO	1.0.10.10.		V VI			
203 Belgrade Donji G	rad (km 7+041) – Belgrade Duna			RAFFIC SU	JSPENDI	<u>ED</u>
	204 Topčider Putnička (km 4+					
	1	Miloševo - Senta - Subotic				
			NONE			
	next to 1st track					
BANATSKO MILOŠEVO	between the 1st and 2nd track		NONE			
BANATSKO MILOŠEVO						
BANATSKO MILOŠEVO Bočar	between the 1st and 2nd track		NONE			
	between the 1st and 2nd track between the 2nd and 3rd track	NONE	NONE NONE			
Bočar Ester	between the 1st and 2nd track between the 2nd and 3rd track	NONE	NONE NONE			
Bočar	between the 1st and 2nd track between the 2nd and 3rd track between the 1st and 2nd track	NONE	NONE NONE NONE			
Bočar Ester PADEJ	between the 1st and 2nd track between the 2nd and 3rd track between the 1st and 2nd track between the 1st and 2nd track	NONE	NONE NONE NONE NONE			
Bočar Ester	between the 1st and 2nd track between the 2nd and 3rd track between the 1st and 2nd track between the 1st and 2nd track between the 2nd and 3rd track between the 1st and 2nd track	NONE	NONE NONE NONE NONE NONE NONE			
Bočar Ester PADEJ Ostojićevo	between the 1st and 2nd track between the 2nd and 3rd track between the 1st and 2nd track between the 1st and 2nd track between the 2nd and 3rd track between the 1st and 2nd track between the 1st and 2nd track between the 1st and 2nd track	NONE	NONE NONE NONE NONE NONE NONE NONE NONE			
Bočar Ester PADEJ	between the 1st and 2nd track between the 2nd and 3rd track between the 1st and 2nd track between the 1st and 2nd track between the 2nd and 3rd track between the 1st and 2nd track between the 1st and 2nd track between the 1st and 2nd track between the 1st and 2nd track between the 2nd and 3rd track	NONE	NONE NONE NONE NONE NONE NONE NONE NONE			
Bočar Ester PADEJ Ostojićevo ČOKA	between the 1st and 2nd track between the 2nd and 3rd track between the 1st and 2nd track between the 1st and 2nd track between the 2nd and 3rd track between the 1st and 2nd track between the 1st and 2nd track between the 1st and 2nd track between the 2nd and 3rd track between the 2nd and 3rd track between the 3rd and 4th track		NONE NONE NONE NONE NONE NONE NONE NONE	45.00	0.17	1 00
Bočar Ester PADEJ Ostojićevo ČOKA SENTA	between the 1st and 2nd track between the 2nd and 3rd track between the 1st and 2nd track between the 1st and 2nd track between the 2nd and 3rd track between the 1st and 2nd track between the 1st and 2nd track between the 1st and 2nd track between the 1st and 2nd track between the 2nd and 3rd track	102+905-102+950	NONE NONE NONE NONE NONE NONE NONE NONE	45,00	0,17	1,90
Bočar Ester PADEJ Ostojićevo ČOKA SENTA Gornji Breg	between the 1st and 2nd track between the 2nd and 3rd track between the 1st and 2nd track between the 1st and 2nd track between the 2nd and 3rd track between the 1st and 2nd track between the 1st and 2nd track between the 1st and 2nd track between the 2nd and 3rd track between the 2nd and 3rd track between the 3rd and 4th track	102+905-102+950 NONE	NONE NONE NONE NONE NONE NONE NONE NONE	45,00	0,17	1,90
Bočar Ester PADEJ Ostojićevo ČOKA SENTA Gornji Breg Bogaraš	between the 1st and 2nd track between the 2nd and 3rd track between the 1st and 2nd track between the 1st and 2nd track between the 2nd and 3rd track between the 1st and 2nd track between the 1st and 2nd track between the 1st and 2nd track between the 2nd and 3rd track between the 2nd and 3rd track between the 3rd and 4th track	102+905-102+950 NONE NONE	NONE NONE NONE NONE NONE NONE NONE NONE	45,00	0,17	1,90
Bočar Ester PADEJ Ostojićevo ČOKA SENTA Gornji Breg Bogaraš Doline	between the 1st and 2nd track between the 2nd and 3rd track between the 1st and 2nd track between the 1st and 2nd track between the 2nd and 3rd track between the 1st and 2nd track between the 1st and 2nd track between the 1st and 2nd track between the 2nd and 3rd track between the 2nd and 3rd track between the 3rd and 4th track	102+905-102+950 NONE NONE NONE	NONE NONE NONE NONE NONE NONE NONE NONE	45,00	0,17	1,90
Bočar Ester PADEJ Ostojićevo ČOKA SENTA Gornji Breg Bogaraš Doline OROM	between the 1st and 2nd track between the 2nd and 3rd track between the 1st and 2nd track between the 1st and 2nd track between the 2nd and 3rd track between the 1st and 2nd track between the 1st and 2nd track between the 1st and 2nd track between the 2nd and 3rd track between the 2nd and 3rd track between the 3rd and 4th track	102+905-102+950 NONE NONE NONE NONE	NONE NONE NONE NONE NONE NONE NONE NONE	45,00	0,17	1,90
Bočar Ester PADEJ Ostojićevo ČOKA SENTA Gornji Breg Bogaraš Doline OROM Gabrić	between the 1st and 2nd track between the 2nd and 3rd track between the 1st and 2nd track between the 1st and 2nd track between the 2nd and 3rd track between the 1st and 2nd track between the 1st and 2nd track between the 1st and 2nd track between the 2nd and 3rd track between the 2nd and 3rd track between the 3rd and 4th track	102+905-102+950 NONE NONE NONE NONE NONE	NONE NONE NONE NONE NONE NONE NONE NONE	45,00	0,17	1,90
Bočar Ester PADEJ Ostojićevo ČOKA SENTA Gornji Breg Bogaraš Doline OROM	between the 1st and 2nd track between the 2nd and 3rd track between the 1st and 2nd track between the 1st and 2nd track between the 2nd and 3rd track between the 1st and 2nd track between the 1st and 2nd track between the 1st and 2nd track between the 2nd and 3rd track between the 2nd and 3rd track between the 3rd and 4th track	102+905-102+950 NONE NONE NONE NONE NONE NONE	NONE NONE NONE NONE NONE NONE NONE NONE	45,00	0,17	1,90
Bočar Ester PADEJ Ostojićevo ČOKA SENTA Gornji Breg Bogaraš Doline OROM Gabrić	between the 1st and 2nd track between the 2nd and 3rd track between the 1st and 2nd track between the 1st and 2nd track between the 2nd and 3rd track between the 1st and 2nd track between the 1st and 2nd track between the 1st and 2nd track between the 2nd and 3rd track between the 2nd and 3rd track between the 3rd and 4th track	102+905-102+950 NONE NONE NONE NONE NONE	NONE NONE NONE NONE NONE NONE NONE NONE	45,00	0,17	1,90
Bočar Ester PADEJ Ostojićevo ČOKA SENTA Gornji Breg Bogaraš Doline OROM Gabrić	between the 1st and 2nd track between the 2nd and 3rd track between the 1st and 2nd track between the 1st and 2nd track between the 2nd and 3rd track between the 1st and 2nd track between the 1st and 2nd track between the 1st and 2nd track between the 2nd and 3rd track between the 3rd and 4th track between the 1st and 2nd track	102+905-102+950 NONE NONE NONE NONE NONE NONE	NONE NONE NONE NONE NONE NONE NONE NONE			
Bočar Ester PADEJ Ostojićevo ČOKA SENTA Gornji Breg Bogaraš Doline OROM Gabrić	between the 1st and 2nd track between the 2nd and 3rd track between the 1st and 2nd track between the 1st and 2nd track between the 2nd and 3rd track between the 1st and 2nd track between the 1st and 2nd track between the 1st and 2nd track between the 3rd and 4rd track between the 3rd and 4th track between the 1st and 2nd track between the 1st and 2nd track	102+905-102+950 NONE NONE NONE NONE NONE NONE 176+360-176+414	NONE NONE NONE NONE NONE NONE NONE NONE	54,00	0,05	1,70 1,60
Bočar Ester PADEJ Ostojićevo ČOKA SENTA Gornji Breg Bogaraš Doline OROM Gabrić Bikovo	between the 1st and 2nd track between the 2nd and 3rd track between the 1st and 2nd track between the 1st and 2nd track between the 2nd and 3rd track between the 1st and 2nd track between the 1st and 2nd track between the 1st and 2nd track between the 3rd and 4th track between the 1st and 2nd track between the 1st and 2nd track between the 1st and 2nd track	102+905-102+950 NONE NONE NONE NONE NONE NONE 176+360-176+414 176+414-176+487 176+487-176+838	NONE NONE NONE NONE NONE NONE NONE NONE	54,00 73,00 351,00	0,05 0,25 0,05	1,70 1,60 1,70
Bočar Ester PADEJ Ostojićevo ČOKA SENTA Gornji Breg Bogaraš Doline OROM Gabrić Bikovo	between the 1st and 2nd track between the 2nd and 3rd track between the 1st and 2nd track between the 1st and 2nd track between the 2nd and 3rd track between the 1st and 2nd track between the 1st and 2nd track between the 1st and 2nd track between the 3rd and 4th track between the 1st and 2nd track between the 1st and 2nd track between the 1st and 2nd track	102+905-102+950 NONE NONE NONE NONE NONE NONE 176+360-176+414 176+414-176+487	NONE NONE NONE NONE NONE NONE NONE NONE	54,00 73,00	0,05	1,70 1,60

206 Pančevo Varoš - Open line junction 2a - (Јабука)									
	next to 1st track	18+131-18+223	station plateau	92,00	0,40	1,60			
PANČEVO VAROŠ	between the 1st and 2nd track	18+105-18+345	platform	240,00	0,40	1,60			
	between the 2nd and 3rd track	18+100-18+364	platform	264,00	0,40	1,60			
	207 Novi Sad- Odžaci - Bogojevo								
NOVI SAD	next to 11th track	77+836-77+950	platform	114,00	0,40	3,00			



Service point			km position of the		Т	Dimension	10
1	Service point	Location					
1	Service point	Location		surface		_	
	1	2	•	4		_ ` /	
Detween the 10th and 1st track		=	77+822-77+950	·	_		,
next to 1st track							
between the 2 th and 1 th track							
between ta 12" and 1" track 78 + 104 - 78 + 250 platform 146,00 0.40 8,90							
Veternik							
FUTOG	Veternik	Detween 14 and 13 track		piationii	173,00	0,40	0,40
PFTROVAC - GLOŽAN							
Backi Maglić RATKOVO							
Parage							
Parage							
RATKÖVO							
ODŽACI							
Odžaci - Kalvarija NONE							
RARAVUKOVO Bogojevo Sclo BOGOJEVO SONE							
Bogojevo Selo							
RIMSKI ŠANČEVI							
RIMSKI ŠANČEVI							
RIMSKI ŠANČEVI		(NOVI SAD) On on Providence		Novi Orlana Ct	dišto		
Budisava NONE SAJKAŠ NONE SAJKAŠ NONE SAJKAŠ NONE SAJKAŠ NONE SAJKAŠ NONE SAJKAŠ NONE SAJKAŠ NONE SAJKAŠ NONE SAJKAŠ NONE SAJKAŠ NONE SAJKAŠ SAJKAŠ NONE SAJKAŠ NONE SAJKAŠ SAJKAŠ SAJKAŠ NONE SAJKAŠ		(NOVI SAD) - Open line junction		icevi- Oriovat Staja	iliste		
Budisava NONE							
Vilovo-Gardinovci							
Vilovo-Gardinovei NONE							
Lok							
TITEL							
Donji Titel NONE Kinćanin NONE Kinćanin NONE NONE PERLEZ NONE							
None PERLEZ							
PERLEZ							
FARKAŽDIN ORLOVAT ORLOVAT ORLOVAT ORLOVAT ORLOVAT STAJALIŠTE between the 1st and 2nd track 64+025-64+075 platform 50,00 1,6 0,35							
ORLOVAT							
ORLOVAT STAJALIŠTE between the 1st and 2nd track C4+025-64+075 platform S0,00 1,6 0,35							
Novi SADMARSHALLING YARD							
NONE							0,35
SADMARSHALLING YARD STATE SABAC SABA		arshalling yard separation switch	<u> 1 No7 - Novi Sad Lokotere</u>	tna - Open line jun	ction SAJ	LOVO	
NONE			210215				
ORLOVAT			NONE				
NONE Stabac	YARD	11001					
None Pettovača Sabac - Open line junction Donja Borina - state border - (Zvornik Novi) Detween the 2nd and 3rd track 64+733-64+973 platform 240,00 0,35 1,60 Detween the 3rd and 4th track 64+733-64+973 platform 240,00 0,35 1,60 Detween the 4rh and 5th track 65+821-64+937 platform 116,00 0,35 1,60 Detween the 4rh and 5th track 65+821-64+937 platform 31,00 0,35 1,60 Detween the 1st and 2nd track 11+324,00-11+355,00 platform 31,00 0,35 1,60 Detween the 1st and 2nd track 11+324,00-11+355,00 platform 31,00 0,35 1,60 Detween the 1st and 2nd track 21+293,00-21+323,00 platform 31,00 0,35 1,60 Detween the 1st and 2nd track 21+293,00-21+323,00 platform 31,00 0,35 1,60 Detween the 1st and 2nd track 32+684,00-32+738,00 platform 31,00 0,35 1,60 Detween the 1st and 2nd track 32+684,00-32+738,00 platform 31,00 0,35 1,60 Detween the 1st and 2nd track 32+684,00-32+738,00 platform 54,00 0,40 1,00 Detween the 1st and 2nd track 7+713,70-7+735,70 platform 50,00 0,35 Detween the 1st and 2nd track 7+713,70-7+735,70 Detween the 1st and 2nd track 7+713,70-7+735,70 Detween the 1st and 2nd track NoNE Detween the 1st and 2nd track NoNE Detween the 1st and 2nd track NoNE Detween the 1st and 2nd track 34+900,00-35+025,00 platform 125,00 2,40 0,55 Detween the 1st and 2nd track NoNE Detween the 1st and 2nd track NoNE Detween the 1st and 2nd track NoNE Detween the 1st and 2nd track NoNE Detween the 1st and 2nd track NoNE Detween the 1st and 2nd track NoNE Detween the 1st and 2nd track NoNE Detween the 1st and 2nd track NoNE Detween the 1st and 2nd track NoNE Detween the 1st and 2nd track NoNE Detween the 1st and 2nd track NoNE Detween the 1st and 2nd track NoNE Detween the 1st and 2nd track NoNE Detween the 2nd and 3rd track Detween the 2nd and 3rd track Detween the 2nd and 3rd track Detween the 2nd and 3rd t	OBLOULE.			čevo)			
Between the 2nd and 3rd track 64+733-64+973 platform 240,00 0,35 1,60				1 (7 11)	•\		
RUMA between the 3rd and 4th track 64+733-64+973 platform 240,00 0,35 1,60 between the 4th and 5th track 65+821-64+937 platform 116,00 0,35 1,60 BUDANOVCI between the 1st and 2nd track 11+324,00-11+355,00 platform 31,00 0,35 1,60 Nikinci next to railway line - left 16+657,70-16+688,70 platform 31,00 0,35 1,60 PLATIČEVO between the 1st and 2nd track 21+293,000 platform 30,00 0,35 1,60 Nikinci next to railway line - right 28+873,15-28+904,15 platform 31,00 0,35 1,60 Nikinci next to railway line - right 28+873,15-28+904,15 platform 31,00 0,35 1,60 Nikinci next to railway line - left 3+975-4+025 platform 54,00 0,40 1,00 Nikinci next to railway line - left 3+975-4+025 platform 50,00 0,35 1,60 None	211					0.25	1.00
BUDANOVCI between the 4th and 5th track 65+821-64+937 platform 116,00 0,35 1,60	DIDA						
BUĐANOVCI between the 1st and 2nd track 11+324,00-11+355,00 platform 31,00 0,35 1,60	KUMA						
Nikinci	DIE ANOTES						
PLATIČEVO between the 1st and 2nd track 21+293,00-21+323,00 platform 30,00 0,35 1,60 Klenak next to railway line - right 28+873,15-28+904,15 platform 31,00 0,35 1,60 ŠABAC between the 1st and 2nd track 32+684,00-32+738,00 platform 54,00 0,40 1,00 Majur next to railway line - left 3+975-4+025 platform 50,00 0,35 1,60 ŠTITAR between the 1st and 2nd track 7+713,70-7+735,70 platform 22,00 0,35 1,60 Dublje Mačvansko NONE NONE PETLOVAČA NONE NONE NONE NONE POdrinsko Novo Selo NONE NONE NONE NONE NONE Podrinsko Novo Selo NONE <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>							
Klenak next to railway line - right 28+873,15-28+904,15 platform 31,00 0,35 1,60 ŠABAC between the 1st and 2nd track 32+684,00-32+738,00 platform 54,00 0,40 1,00 Majur next to railway line - left 3+975-4+025 platform 50,00 0,35 ŠTITAR between the 1st and 2nd track 7+713,70-7+735,70 platform 22,00 0,35 1,60 Dublje Mačvansko NONE PETLOVAČA NONE Ribari NONE PRNJAVOR MAČVANSKI NONE Podrinsko Novo Selo LEŠNICA between the 1st and 2nd track 34+900,00-35+025,00 platform 125,00 2,40 0,55 Jadarska Straža next to railway line - right 38+860,00-38+940,00 platform 80,00 0,35 1,60 LOZNICA NONE LOZNICA NONE LOZNICA NONE LOZNICA Straža NONE LOZNICA NONE LOZNICA NONE LOZNICA Straža NONE LOZNICA NONE LOZNICA Straža NONE LOZNICA Straža NONE LOZNICA Straža NONE LOZNICA Straža NONE LOZNICA Straža NONE LOZNICA Straža NONE LOZNICA Straža NONE LOZNICA Straža NONE LOZNICA Straža NONE Straža NONE LOZNICA Straža NONE Straža NONE LOZNICA Straža NONE Straža NONE NONE LOZNICA Straža NONE Straža NONE NONE NONE LOZNICA Straža NONE Straža NONE NO		·					
ŠABAC between the 1st and 2nd track 32+684,00-32+738,00 platform 54,00 0,40 1,00 Majur next to railway line - left 3+975-4+025 platform 50,00 0,35 1 ŠTITAR between the 1st and 2nd track 7+713,70-7+735,70 platform 22,00 0,35 1,60 Dublje Mačvansko NONE							
Majur next to railway line - left 3+975-4+025 platform 50,00 0,35 ŠTITAR between the 1st and 2nd track 7+713,70-7+735,70 platform 22,00 0,35 1,60 Dublje Mačvansko NONE				•			
ŠTITAR between the 1st and 2nd track 7+713,70-7+735,70 platform 22,00 0,35 1,60 Dublje Mačvansko NONE NONE PETLOVAČA NONE NONE Ribari NONE NONE PRNJAVOR MAČVANSKI NONE NONE Podrinsko Novo Selo NONE NONE LEŠNICA between the 1st and 2nd track 34+900,00-35+025,00 platform 125,00 2,40 0,55 Jadarska Straža next to railway line - right 38+860,00-38+940,00 platform 80,00 0,35 1,60 Lipnica NONE NONE LOZNICA NONE NONE KOVILJAČA between the 1st and 2nd track 56+170,00-56+213,00 platform 43,00 0,35 1,60 Gornja Koviljača NONE NONE NONE NONE NONE NONE BRASINA between the 2 nd and 3 rd track 65+212-65+354 platform 142,00 0,35 3,20				1			1,00
Dublje Mačvansko		·					4 / ^
PETLOVAČA NONE Ribari NONE PRNJAVOR MAČVANSKI NONE Podrinsko Novo Selo NONE LEŠNICA between the 1st and 2nd track 34+900,00-35+025,00 platform 125,00 2,40 0,55 Jadarska Straža next to railway line - right 38+860,00-38+940,00 platform 80,00 0,35 1,60 Loznica NONE Loznica Fabrika NONE KOVILJAČA between the 1st and 2nd track 56+170,00-56+213,00 platform 43,00 0,35 1,60 Gornja Koviljača NONE BRASINA between the 2 nd and 3 rd track 65+212-65+354 platform 142,00 0,35 3,20		between the 1st and 2nd track		platform	22,00	0,35	1,60
Ribari							
PRNJAVOR MAČVANSKI NONE Podrinsko Novo Selo NONE LEŠNICA between the 1st and 2nd track 34+900,00-35+025,00 platform 125,00 2,40 0,55 Jadarska Straža next to railway line - right 38+860,00-38+940,00 platform 80,00 0,35 1,60 Lipnica NONE LOZNICA NONE Loznica Fabrika NONE KOVILJAČA between the 1st and 2nd track 56+170,00-56+213,00 platform 43,00 0,35 1,60 Gornja Koviljača NONE BRASINA between the 2 nd and 3 rd track 65+212-65+354 platform 142,00 0,35 3,20							
NONE							
LEŠNICA between the 1st and 2nd track 34+900,00-35+025,00 platform 125,00 2,40 0,55 Jadarska Straža next to railway line - right 38+860,00-38+940,00 platform 80,00 0,35 1,60 Lipnica NONE LOZNICA NONE Loznica Fabrika NONE KOVILJAČA between the 1st and 2nd track 56+170,00-56+213,00 platform 43,00 0,35 1,60 Gornja Koviljača NONE BRASINA between the 2 nd and 3 rd track 65+212-65+354 platform 142,00 0,35 3,20							
Jadarska Straža next to railway line - right 38+860,00-38+940,00 platform 80,00 0,35 1,60 Lipnica NONE LOZNICA NONE Loznica Fabrika NONE KOVILJAČA between the 1st and 2nd track 56+170,00-56+213,00 platform 43,00 0,35 1,60 Gornja Koviljača NONE BRASINA between the 2 nd and 3 rd track 65+212-65+354 platform 142,00 0,35 3,20				· · · · · · · · · · · · · · · · · · ·			1
Lipnica NONE LOZNICA NONE Loznica Fabrika NONE KOVILJAČA between the 1st and 2nd track 56+170,00-56+213,00 platform 43,00 0,35 1,60 Gornja Koviljača NONE BRASINA between the 2 nd and 3 rd track 65+212-65+354 platform 142,00 0,35 3,20							
LOZNICA NONE Loznica Fabrika NONE KOVILJAČA between the 1st and 2nd track 56+170,00-56+213,00 platform 43,00 0,35 1,60 Gornja Koviljača NONE BRASINA between the 2 nd and 3 rd track 65+212-65+354 platform 142,00 0,35 3,20		next to railway line - right		platform	80,00	0,35	1,60
Loznica Fabrika NONE KOVILJAČA between the 1st and 2nd track 56+170,00-56+213,00 platform 43,00 0,35 1,60 Gornja Koviljača NONE BRASINA between the 2 nd and 3 rd track 65+212-65+354 platform 142,00 0,35 3,20							
KOVILJAČA between the 1st and 2nd track 56+170,00-56+213,00 platform 43,00 0,35 1,60 Gornja Koviljača NONE BRASINA between the 2 nd and 3 rd track 65+212-65+354 platform 142,00 0,35 3,20							
Gornja Koviljača BRASINA between the 2 nd and 3 rd track 65+212-65+354 platform 142,00 0,35 3,20							
BRASINA between the 2^{nd} and 3^{rd} track $65+212-65+354$ platform $142,00$ $0,35$ $3,20$	KOVILJAČA	between the 1st and 2nd track	56+170,00-56+213,00	platform	43,00	0,35	1,60
BRASINA between the 2^{nd} and 3^{rd} track $65+212-65+354$ platform $142,00$ $0,35$ $3,20$	Gornja Koviljača		NONE				
				1	142,00		3,20
	Donja Borina	next to railway line - right	68+650-68+750	platform			



		km position of the	<u> </u>	Ī	Dimensions	1
Service point	Location	beginning and the end	Platform/arranged surface	Length	Height	Width
•		of platform	surface	(m)	(m)	(m)
1	2	3	4	5	6	7
	212 (Platičevo) - Open line j		ction 3 - (Štitar)			
		nć - Kraljevo - Požega	1.6	202.00	0.20	(10
STALAĆ	between the 2nd and 3rd track	176+222-176+425	platform	203,00	0,28	6,40
STALAĆ	between the 4th and 5th track	176+222-176+425	platform	203,00	0,28	6,40
Mrzenica	between the 6th and 7th track	176+270-176+378 3+868-3+910	platform	108,00	0,28	5,30 2,00
Makrešane	right side	3+808-3+910 NONE	platform	42,00	0,35	2,00
DEDINA		NONE				
	between the 2nd and 3rd track	14+451-14+626	platform	175,00	0,35	2,84
KRUŠEVAC	between the 3 rd and 4 th track	14+490,3-14+610,3	platform	120,00	0,35	1,60
Čitluk	between the 5 and 1 track	NONE		120,00	0,55	1,00
KOŠEVI		NONE				
Globoder		NONE				
STOPANJA		NONE				
Donja Počekovina		NONE				
POČEKOVINA		NONE				
Trstenički Odžaci		NONE				
TRSTENIK	between the 2nd and 3rd track	42+400-42+500	platform	102,00	0,35	1,80
VRNJAČKA BANJA	between the 2nd and 3rd track	49+136-49+241	platform	105,00	0,35	1,60
Lipova		NONE				
Tominac		NONE				
PODUNAVCI		NONE				
Vraneši		NONE				
Vrba		NONE				
RATINA	10.11	NONE			0.0.5	1.60
Sirča	left side	68+880,70-68+940,40	platform	59,70	0,35	1,60
KRALJEVO	between the 1st and 2nd track	84+641,9-84+774,9	platform	133	0,30	1,60
ADDANI	between the 2nd and 3rd track	84+644,4-84+773	platform	128,6	0,30	1,60
ADRANI	between the 2nd and 3rd track	78+622,20-78+657,20	platform	35,00	0,35	1,60
Mrsać SAMAILA	left side	81+513-81+553 NONE	platform	40,00	0,33	0,50
Goričani	left side	88+610-88+658	platform	48.00	0.37	1,00
MRŠINCI	between the 2nd and 3rd track	92+241-92+279	platform	38.00	0.37	1,00
Kukići	between the 2nd and 3rd track	NONE		36.00	0.55	1,00
ZABLAĆE		NONE				
Baluga		NONE				
g	left from 1st track	105+500-105+590	platform	90,00	0,44	6,50
ČAČAK	between the 1st and 2nd track	105+494-105+628	platform	134,00	0,37	1,60
	between the 2nd and 3rd track	105+494-105+615	platform	121,00	0,38	1,60
Trbušani	next to railway line - left	110+240-110+263	platform	23,00	0,40	1,60
PRIJEVOR	between the 2nd and 3rd track	112+820-113+070	platform	250,00	0,40	1,60
OVČAD DANIA	next to railway line - right	120+450-120+550	platform	100,00	0,40	1,60
OVČAR BANJA	between the 1st and 2nd track	120+450-120+652	platform	202,00	0,35	1,60
Jelen Do	next to railway line - right	127+180-127+230	platform	50,00	0,40	1,60
DRAGAČEVO	between the 2nd and 3rd track	128+295-128+405	platform	110,00	0,40	1,60
Gugalj		NONE				
Boračko		NONE				
POŽEGA	next to 1st track	140+720-140+975	platform	255,00	0,45	10,00
	between the 2nd and 3rd track	140+675-140+984	platform	309,00	0,45	6,20
	of Kraljevo station: (Mataruška I					ni)
215 connecting	track of Požega station: (Uzićo) - s			054 - (Dra	gačevo)	
	216 Smederevo – Open line			102.00	0.40	1.60
SMEDEREVO	between the 1st and 2nd track	0+000-0+103	platform	103,00	0,40	1,60
	between the 2nd and 3rd track	0+000-0+105	platform	105,00	0,40	1,60
Godomin	next to railway line - left	3+303-3+350	platform	47,00	0,40	1,60
RADINAC	next to 1st track	6+650-6+800	platform	150,00	0,50	2,20
	between the 2nd and 3rd track	6+650-6+800	platform	150,00	0,60	6,20
Vranovo	next to railway line - left	9+475-9+537	platform	62,00	0,40	1,90
	between the 1st and 2nd track	69+030-69+175	platform	145,00	0,40	1,90
MALA KRSNA	between the 2nd and 3rd track	69+030-69+175	platform	145,00	0,40	1,9
	between the 3rd and 4th track	69+042-69+184	platform	142,00	0,40	1,90
	between the 4th and 5th track	69+080-69+230	platform	150,00	0,40	1,90
	21 / Open line junc	ction Jezava – Smederevo	Luka			



	T	km position of the	1	Т	Dimensions	,
Service point	Location	beginning and the end	Platform/arranged	Length	Height	Width
zer nee peint	200000	of platform	surface	(m)	(m)	(m)
1	2	3	4	5	6	7
	218 Mala Krsna - Bor - 0	Open line junction "2" - (\	Vražogrnac)			
	between the 1st and 2nd track	69+030-69+175	platform	145,00	0,40	1,90
MALA KRSNA	between the 2nd and 3rd track	69+030-69+175	platform	145,00	0,40	1,90
MALA KRSNA	between the 3rd and 4th track	69+042-69+184	platform	142,00	0,40	1,90
	between the 4th and 5th track	69+080-69+230	platform	150,00	0,40	1,90
Ljubičevski most		NONE				
POŽAREVAC	between the 1st and 2nd track	87+703-87+826	platform	123,00	0,40	1,80
	between the 2nd and 3rd track	87+712-87+816	platform	104,00	0,40	1,60
Jugovićevo	next to track - left	89+078-89+094	platform	16,00	0,50	1,00
Sopot Požarevački	next to track -right	90+082-90+107	platform	24,00	0,40	1,60
BUBUŠINAC-BRATINAC		NONE				
Bare - Kasidol	1 4 4 12 14 1	NONE	1.40	71.00	0.40	1.60
STIG Majilovac	between the 1st and 2nd track	102+693-102+764 NONE	platform	71,00	0,40	1,60
SIRAKOVO	between the 1st and 2nd track	109+026-109+079	platform	53,00	0.40	1,60
LJUBINJE	between the 1st and 2nd track	116+381-116+444	platform	63,00	0,40 0,40	1,60
Češljeva Bara	next to railway line - left	122+138-122+200	platform	62,00	0,40	1,60
RABROVO-KLENJE	between the 1st and 2nd track	126+007-126+067	platform	60,00	0,40	1,60
Mustapić	Street are 15t and 2nd there	NONE	Pianoiiii	00,00	0,10	1,00
Mišljenovac		NONE				
ZVIŽD		NONE				
Kučevska Turija		NONE				
KAONA		NONE				
KUČEVO		NONE				
Neresnica		NONE				
Neresnica (tov.)		NONE				
Voluja		NONE	,			
BRODICA	between the 2nd and 3rd track	164+515-164+576	platform	61,00	0,40	1,60
Bosiljkovac		NONE				
Blagojev Kamen		NONE				
MAJDANPEK	between the 2nd and 3rd track	178+769-178+920	platform	151,00	0,35	1,60
Debeli Lug	next to railway line - left	181+300-181+318	platform	18,00	0,35	1,60
LESKOVO	between the 2nd and 3rd track	187+660-187+722	platform	62,00	0,35	1,60
Jasikovo	next to railway line - left	191+810-191+890	arranged surface	80,00	0,09	1,60
Vlaole Selo VLAOLE	next to railway line - right between the 2nd and 3rd track	194+740-194+780 197+163-197+224	arranged surface	40,00 61,00	0,20 0,35	1,60 1,60
Gornjane	next to railway line - right	200+288-200+386	arranged surface	98,00	0,35	1,60
CEROVO	next to failway fine - fight	NONE	arranged surface	90,00	0,33	1,00
Kriveljski most	next to railway line - right	207+905-207+995	arranged surface	90.00	0,35	1,60
Kriveljski potok	next to railway line - left	211+873-211+913	arranged surface	40,00	0,35	1,60
MALI KRIVELJ	between the 1st and 2nd track	215+171-215+206	platform	35,00	0,35	1,60
Brezonik	next to railway line - left	217+490-217+540	platform	50,00	0,35	1,60
	next to 1st track	221+369-221+452	platform	83,00	0,35	8,00
BOR	between the 2nd and 3rd track	221+352-221+452	platform	100,00	0,35	1,60
BOR FREIGHT STATION	between the 2nd and 3rd track	224+320-224+375	platform	55,00	0,35	1,60
BORSKA SLATINA		NONE				
ZAGRAĐE		NONE				
RGOTINA	between the 1st and 2nd track	244+658-244+738	platform	80,00	0,35	1,60
		rst - Zaječar – Prahovo Pr				
CRVENI KRST	between the 2nd and 3rd track	240+842-240+994	platform	152,00	0,40	1,60
Pantelej	next to railway line - left	7+455-7+507	platform	52,00	0,35	1,60
MATEJEVAC	between the 1st and 2nd track	12+370-12+395	platform	25,00	0,35	1,50
Gornja Vrežina		NONE				
Jasenovik		NONE	1.0	50.00	0.25	1.60
GRAMADA	between the 1st and 2nd track	30+232-30+282	platform	50,00	0,35	1,60
Hadžićevo	hoturous th = 1-4 12 14 1	NONE	1-4£	150.00	0.25	1.60
SVRLJIG	between the 1st and 2nd track	39+925-40+075	platform	150,00	0,35	1,60
Niševac	next to railway line - right	46+002-46+018	platform	16,00	0,35	1,60
PALILULA Syrlijěki Milikovac	between the 1st and 2nd track	49+320-49+355 NONE	platform	35,00	0,35	1,60
Svrljiški Miljkovac PODVIS	between the 1st and 2nd track	NONE 60+853-60+903	platform	50,00	0,35	1,60
Rgošte	between the 1st and 2nd track	NONE	pianomi	50,00	0,33	1,00
KNJAŽEVAC	between the 1st and 2nd track	68+338-68+392	platform	54,00	0,35	1,60
KINJAZEVAC	octween the 1st and 2nd track	00+330 - 00±392	pianoiiii	54,00	0,33	1,00



		km position of the		ī	Dimensions	1
Service point	Location	beginning and the end	Platform/arranged	Length	Height	Width
-		of platform	surface	(m)	(m)	(m)
1	2	3	4	5	6	7
Gornje Zuniče	next to railway line - right	72+080-72+142	platform	62,00	0,35	1,60
Donje Zuniče	next to railway line - right	74+988-75+076	platform	88,00	0,35	1,60
MINIĆEVO	between the 1st and 2nd track between the 2nd and 3rd track	81+830-81+930 81+930-81+975	platform platform	100,00	0,35 0,35	1,60 1,60
Selačka Reka	next to railway line - right	84+450-84+500	arranged surface	50,00	0,35	1,60
Mali Izvor	next to railway line - right	88+180-88+230	platform	50,00	0,35	1,60
Vratarnica	between the 1st and 2nd track	96+048-96+098	platform	50,00	0,35	1,60
GRLJAN	between the 1st and 2nd track	102+955-103+105	platform	150,00	0,35	1,60
Timok	next to railway line - left	107+320-107+380	arranged surface	60,00	0,35	1,60
	between the 1st and 2nd track	111+622-111+820	platform	198,00	0,35	1,60
ZAJEČAR	between the 2nd and 3rd track	111+662-111+815	platform	153,00	0,35	1,60
	between the 3rd and 4th track	111+651-111+803	platform	152,00	0,35	1,60
VRAŽOGRNAC	between the 1st and 2nd track	118+760-118+910	platform	150,00	0,35	1,60
TRNAVAC	between the 1st and 2nd track	124+593-124+668	platform	75,00	0,35	1,60
Čokonjar Sokolovica	next to railway line - left next to railway line - right	128+500-128+550 131+100-131+125	platform platform	50,00 25,00	0,35 0,35	1,60 1,60
TABAKOVAC	between the 1st and 2nd track	136+170-136+223	platform	53,00	0,35	1,60
Tabakovačka reka	next to railway line - right	138+740-138+790	platform	50,00	0,35	1,60
BRUSNIK	between the 1st and 2nd track	145+616-145+696	platform	80,00	0,35	1,60
Tamnič	next to railway line - right	148+420-148+480	platform	60,00	0,35	1,60
Crnomasnica	next to railway line - right	151+323-151+364	platform	41,00	0,35	1,60
Rajac	next to railway line - right	154+430-154+505	platform	75,00	0,35	1,60
ROGLJEVO	between the 1st and 2nd track	156+795-156+875	platform	80,00	0,35	1,60
Veljkovo		NONE				
Mokranja		NONE				
Kobišnica	1	NONE	1.0	150.00	0.25	1.60
NEGOTIN	between the 2nd and 3rd track	174+049-174+199	platform	150,00 80,00	0,35	1,60
PRAHOVO PRAHOVO PRISTANIŠTE	between the 2nd and 3rd track	181+974-182+054 NONE	platform	80,00	0,35	1,60
TRATIOVOTRISTANISTE	220 (Rgotina) - Open line juncti		on "1" - (Trnavac)			
v.		n line junction "1" - Kurš				
KURŠUMLIJA		NONE				
KURŠUMLIJA	222 Ki	uršumlija - Kastrat NONE				
KURSUMLIJA	223 Dolievac - Kas	strat – Merdare - Kosovo	Polie			
DOLUTIVA C		261+419-261+527	platform	108		
	between the 1st and 2nd track				0.40	1.60
DOLJEVAC	between the 1st and 2nd track between the 2nd and 3rd track	261+419-261+526	platform	107	0,40 0,40	1,60 1,60
Šajinovac		261+419-261+526 NONE	•			
Šajinovac Toplički Badnjevac		NONE NONE	•			
Šajinovac Toplički Badnjevac Jasenica		NONE NONE NONE	•			
Šajinovac Toplički Badnjevac Jasenica ŽITORAĐA	between the 2nd and 3rd track	NONE NONE NONE NONE	platform	107	0,40	1,60
Šajinovac Toplički Badnjevac Jasenica ŽITORAĐA Žitorađa Centar		NONE NONE NONE NONE 10+925-10+977	•			
Šajinovac Toplički Badnjevac Jasenica ŽITORAĐA Žitorađa Centar Rečica	between the 2nd and 3rd track	NONE NONE NONE NONE 10+925-10+977 NONE	platform	107	0,40	1,60
Šajinovac Toplički Badnjevac Jasenica ŽITORAĐA Žitorađa Centar Rečica Lukomir	between the 2nd and 3rd track	NONE NONE NONE NONE 10+925-10+977 NONE NONE	platform	107	0,40	1,60
Šajinovac Toplički Badnjevac Jasenica ŽITORAĐA Žitorađa Centar Rečica Lukomir Podina	next to railway line - left	NONE NONE NONE NONE 10+925-10+977 NONE NONE NONE	platform platform	52,00	0,40	1,60
Šajinovac Toplički Badnjevac Jasenica ŽITORAĐA Žitorađa Centar Rečica Lukomir Podina Babin Potok	next to railway line - left next to railway line - right	NONE NONE NONE NONE 10+925-10+977 NONE NONE NONE 18+726-18+774	platform platform platform	52,00	0,40	1,60
Šajinovac Toplički Badnjevac Jasenica ŽITORAĐA Žitorađa Centar Rečica Lukomir Podina	next to railway line - left	NONE NONE NONE NONE 10+925-10+977 NONE NONE NONE	platform platform	52,00	0,40	1,60
Šajinovac Toplički Badnjevac Jasenica ŽITORAĐA Žitorađa Centar Rečica Lukomir Podina Babin Potok PROKUPLJE	next to railway line - left next to railway line - right between the 1st and 2nd track	NONE NONE NONE NONE 10+925-10+977 NONE NONE NONE NONE 18+726-18+774 22+257-22+370	platform platform platform platform	52,00 48,00 113,00	0,40	1,60 1,60 1,60 1,60
Šajinovac Toplički Badnjevac Jasenica ŽITORAĐA Žitorađa Centar Rečica Lukomir Podina Babin Potok PROKUPLJE Gornja Draganja Toplička Mala Plana Bresničići	next to railway line - left next to railway line - right between the 1st and 2nd track	NONE NONE NONE 10+925-10+977 NONE NONE NONE NONE 18+726-18+774 22+257-22+370 24+990-25+027 NONE NONE	platform platform platform platform	52,00 48,00 113,00	0,40	1,60 1,60 1,60 1,60
Šajinovac Toplički Badnjevac Jasenica ŽITORAĐA Žitorađa Centar Rečica Lukomir Podina Babin Potok PROKUPLJE Gornja Draganja Toplička Mala Plana Bresničići BELOLJIN	next to railway line - left next to railway line - right between the 1st and 2nd track	NONE NONE NONE 10+925-10+977 NONE NONE NONE NONE 18+726-18+774 22+257-22+370 24+990-25+027 NONE NONE NONE NONE	platform platform platform platform	52,00 48,00 113,00	0,40	1,60 1,60 1,60 1,60
Šajinovac Toplički Badnjevac Jasenica ŽITORAĐA Žitorađa Centar Rečica Lukomir Podina Babin Potok PROKUPLJE Gornja Draganja Toplička Mala Plana Bresničići BELOLJIN Toplica Milan	next to railway line - left next to railway line - right between the 1st and 2nd track	NONE NONE NONE 10+925-10+977 NONE NONE NONE NONE 18+726-18+774 22+257-22+370 24+990-25+027 NONE NONE NONE NONE NONE NONE NONE	platform platform platform platform	52,00 48,00 113,00	0,40	1,60 1,60 1,60 1,60
Šajinovac Toplički Badnjevac Jasenica ŽITORAĐA Žitorađa Centar Rečica Lukomir Podina Babin Potok PROKUPLJE Gornja Draganja Toplička Mala Plana Bresničići BELOLJIN Toplica Milan Pločnik	next to railway line - left next to railway line - right between the 1st and 2nd track	NONE NONE NONE 10+925-10+977 NONE NONE NONE 18+726-18+774 22+257-22+370 24+990-25+027 NONE NONE NONE NONE NONE NONE NONE NON	platform platform platform platform	52,00 48,00 113,00	0,40	1,60 1,60 1,60 1,60
Šajinovac Toplički Badnjevac Jasenica ŽITORAĐA Žitorađa Centar Rečica Lukomir Podina Babin Potok PROKUPLJE Gornja Draganja Toplička Mala Plana Bresničići BELOLJIN Toplica Milan Pločnik Barlovo	next to railway line - left next to railway line - right between the 1st and 2nd track	NONE NONE NONE 10+925-10+977 NONE NONE NONE NONE 18+726-18+774 22+257-22+370 24+990-25+027 NONE NONE NONE NONE NONE NONE NONE NON	platform platform platform platform	52,00 48,00 113,00	0,40	1,60 1,60 1,60 1,60
Šajinovac Toplički Badnjevac Jasenica ŽITORAĐA Žitorađa Centar Rečica Lukomir Podina Babin Potok PROKUPLJE Gornja Draganja Toplička Mala Plana Bresničići BELOLJIN Toplica Milan Pločnik Barlovo Novoselske Livade	next to railway line - left next to railway line - right between the 1st and 2nd track	NONE NONE NONE 10+925-10+977 NONE NONE NONE NONE 18+726-18+774 22+257-22+370 24+990-25+027 NONE NONE NONE NONE NONE NONE NONE NON	platform platform platform platform	52,00 48,00 113,00	0,40	1,60 1,60 1,60 1,60
Šajinovac Toplički Badnjevac Jasenica ŽITORAĐA Žitorađa Centar Rečica Lukomir Podina Babin Potok PROKUPLJE Gornja Draganja Toplička Mala Plana Bresničići BELOLJIN Toplica Milan Pločnik Barlovo Novoselske Livade Pepeljevac	next to railway line - left next to railway line - right between the 1st and 2nd track	NONE NONE NONE 10+925-10+977 NONE NONE NONE 18+726-18+774 22+257-22+370 24+990-25+027 NONE NONE NONE NONE NONE NONE NONE NON	platform platform platform platform	52,00 48,00 113,00	0,40	1,60 1,60 1,60 1,60
Šajinovac Toplički Badnjevac Jasenica ŽITORAĐA Žitorađa Centar Rečica Lukomir Podina Babin Potok PROKUPLJE Gornja Draganja Toplička Mala Plana Bresničići BELOLJIN Toplica Milan Pločnik Barlovo Novoselske Livade Pepeljevac Rasputnica Kastrat	next to railway line - left next to railway line - right between the 1st and 2nd track	NONE NONE NONE 10+925-10+977 NONE NONE NONE NONE 18+726-18+774 22+257-22+370 24+990-25+027 NONE NONE NONE NONE NONE NONE NONE NON	platform platform platform platform	52,00 48,00 113,00	0,40	1,60 1,60 1,60 1,60
Šajinovac Toplički Badnjevac Jasenica ŽITORAĐA Žitorađa Centar Rečica Lukomir Podina Babin Potok PROKUPLJE Gornja Draganja Toplička Mala Plana Bresničići BELOLJIN Toplica Milan Pločnik Barlovo Novoselske Livade Pepeljevac Rasputnica Kastrat Visoka	next to railway line - left next to railway line - right between the 1st and 2nd track	NONE NONE NONE NONE 10+925-10+977 NONE NONE NONE NONE 18+726-18+774 22+257-22+370 24+990-25+027 NONE NONE NONE NONE NONE NONE NONE NON	platform platform platform platform	52,00 48,00 113,00	0,40	1,60 1,60 1,60 1,60
Šajinovac Toplički Badnjevac Jasenica ŽITORAĐA Žitorađa Centar Rečica Lukomir Podina Babin Potok PROKUPLJE Gornja Draganja Toplička Mala Plana Bresničići BELOLJIN Toplica Milan Pločnik Barlovo Novoselske Livade Pepeljevac Rasputnica Kastrat Visoka Ljuša	next to railway line - left next to railway line - right between the 1st and 2nd track	NONE NONE NONE NONE 10+925-10+977 NONE NONE NONE NONE 18+726-18+774 22+257-22+370 24+990-25+027 NONE NONE NONE NONE NONE NONE NONE NON	platform platform platform platform	52,00 48,00 113,00	0,40	1,60 1,60 1,60 1,60
Šajinovac Toplički Badnjevac Jasenica ŽITORAĐA Žitorađa Centar Rečica Lukomir Podina Babin Potok PROKUPLJE Gornja Draganja Toplička Mala Plana Bresničići BELOLJIN Toplica Milan Pločnik Barlovo Novoselske Livade Pepeljevac Rasputnica Kastrat Visoka	next to railway line - left next to railway line - right between the 1st and 2nd track	NONE NONE NONE NONE 10+925-10+977 NONE NONE NONE NONE 18+726-18+774 22+257-22+370 24+990-25+027 NONE NONE NONE NONE NONE NONE NONE NON	platform platform platform platform	52,00 48,00 113,00	0,40	1,60 1,60 1,60 1,60
Šajinovac Toplički Badnjevac Jasenica ŽITORAĐA Žitorađa Centar Rečica Lukomir Podina Babin Potok PROKUPLJE Gornja Draganja Toplička Mala Plana Bresničići BELOLJIN Toplica Milan Pločnik Barlovo Novoselske Livade Pepeljevac Rasputnica Kastrat Visoka Ljuša Rudare	next to railway line - left next to railway line - right between the 1st and 2nd track	NONE NONE NONE NONE 10+925-10+977 NONE NONE NONE NONE 18+726-18+774 22+257-22+370 24+990-25+027 NONE NONE NONE NONE NONE NONE NONE NON	platform platform platform platform	52,00 48,00 113,00	0,40	1,60 1,60 1,60 1,60
Šajinovac Toplički Badnjevac Jasenica ŽITORAĐA Žitorađa Centar Rečica Lukomir Podina Babin Potok PROKUPLJE Gornja Draganja Toplička Mala Plana Bresničići BELOLJIN Toplica Milan Pločnik Barlovo Novoselske Livade Pepeljevac Rasputnica Kastrat Visoka Ljuša Rudare Dešiška	next to railway line - left next to railway line - right between the 1st and 2nd track	NONE	platform platform platform platform	52,00 48,00 113,00	0,40	1,60 1,60 1,60 1,60



Conception Con			km position of the		1	Dimension	ıç
Company Comp	Service point	Location					
1	Service point	Location		surface	-	_	
Vasilipude	1	2	•	4		\ . ·	/
Morriance	Kosančić Ivan	_	-				
NONE							
\$\frac{\$2\$\$ Kosvoro Polje* Netohija - Pec** \$\frac{\$2\$\$ Kosvoro Polje* Freight - Open line junction O(Prenica) *** \$\frac{\$2\$\$ Kosvoro Polje* Freight - Open line junction O(Prenica) *** \$\frac{\$2\$\$ Kosvoro Polje* Freight - Open line junction O(Prenica) *** \$\frac{\$2\$\$ Kosvoro Polje* Freight - Open line junction O(Prenica) *** \$\frac{\$2\$\$ Kosvoro Polje* Freight - Open line junction O(Prenica) *** \$\frac{\$2\$\$ Kosvoro Polje* Composition O(Prenica) *** \$\frac{\$2\$\$ KULA \$\frac{\$2\$\$ between the 2nd and 3rd track \$\frac{\$4\$}{\$4\$} + \frac{\$6\$}{\$4\$} + \frac{\$6\$}{\$6\$} + \frac{\$6\$}{\$7\$} \$\frac{\$6\$}{\$1\$} \text{ for five poly for platform \$\frac{\$4\$}{\$0.00}\$ \$0.15 \$1.55 \$\frac{{25}}{\$1.55}\$ \$\fr							
VRBAS		224 Kosovo					
VRBAS				(Drenica) **			
VRBAS				,			
RULA	MDDAG	between the 2nd and 3rd track	116+702-116+770,3	platform	68,00	0,35	1,40
RULA between the 2nd and 3rd track 47-62-647+667 platform 41,00 0,25 1,55	VRBAS	between the 3rd and 4th track	116+702-116+770,3	platform	68,00	0,35	1,40
SIVAC Novi Sivac NoNE	KULA	between the 2nd and 3rd track	47+626-47+667	platform	41,00	0,25	1,52
Nov1 Sivace	CRVENKA	between the 1st and 2nd track	54+956-54+986	platform	30,00	0,15	1,56
Mathematics Standard Track Total	SIVAC		NONE				
Detween the 1st and 2nd track 79+692-79+722 platform 30,00 0,15 1,31	Novi Sivac		NONE				
SOMBOR	KLJAJIĆEVO	between the 1st and 2nd track	75+417-75+456	platform	39,00	0,15	1,38
SOMBOR	Čonoplja	between the 1st and 2nd track	79+692-79+722	platform	30,00	0,15	1,31
SOMBOR		between the 1st and 2nd track	73+417-73+477	platform	60,00	0,31	1,61
Detween the 2nd and 3rd track		between the 1st and 2nd track	73+584-73+612		28,00	0,05	1,50
Detween the 2nd and 3rd track 73+584-73+612 arranged surface 28,00 0,05 1,50	SOMBOD						1,50
Detween the 3rd and 4th track	MODIMOG						
SUBOTICA Subotica - Subotica Fabrika - RAILWAY LINE IS OUT OF SERVICE 302 Subotica - Subotica Bolnica Subotica S							1,50
Subotica - Subotica - Fabrika - RAIL-WAY LINE IS OUT OF SERVICE		between the 3rd and 4th track	73+584-73+701	arranged surface	117,00	0,05	1,50
Subotica - Subotica - Fabrika - RAIL-WAY LINE IS OUT OF SERVICE							
SUBOTICA Between the 1st and 2nd track 176+360-176+414 arranged surface 54,00 0,05 1,70 between the 1st and 2nd track 176+414-176+487 platform 73,00 0,25 1,60 between the 1st and 2nd track 176+487-176+838 arranged surface 351,00 0,05 1,70 between the 1st and 2nd track 176+487-176+838 arranged surface 288,00 0,05 1,70 between the 3rd and 4th track 176+322-176+838 arranged surface 288,00 0,05 1,70 between the 3rd and 4th track 176+322-176+838 arranged surface 288,00 0,05 1,70 303 Novi Sad(km 1+042) - Novi Sad Ložionica restrict 11th track 77+835-779+850 platform 114,00 0,40 3,00 between the 11th and 10th track 77+835-779+850 platform 128,00 0,40 4,20 between the 10th and 1st track 77+835-78+857 platform 52,00 0,40 4,20 keep the 10th and 1st track 77+835-78+250 platform 415,00 0,40 8,70 riskly 12. ii. 1, konoceka 78+104-78+250 platform 146,00 0,40 8,70 riskly 12. ii. 1, konoceka 78+104-78+250 platform 146,00 0,40 8,70 riskly 12. ii. 1, konoceka 78+104-78+250 platform 146,00 0,40 8,70 riskly 12. ii. 1, konoceka 78+104-78+260 platform 146,00 0,40 8,70 riskly 12. ii. 1, konoceka 78+104-78+260 platform 146,00 0,40 8,70 riskly 12. ii. 1, konoceka 78+104-78+260 platform 146,00 0,40 8,70 riskly 12. ii. 1, konoceka 78+104-78+260 platform 146,00 0,40 8,70 riskly 12. ii. konoceka 78+104-78+260 platform 146,00 0,40 8,70 riskly 12. ii. konoceka 78+104-78+260 platform 146,00 0,40 8,70 riskly 12. ii. konoceka 78+104-78+260 platform 146,00 0,40 0,40 1,60 riskly 13. ii. riskly 13. konoceka 78+104-78+260 platform 146,00 0,40 1,60 riskly 13. konoceka 78+104-78+260 platform 146,00 0,40 1,60 riskly 13. konoceka 78+104-78+260 platform 146,00 0,40 1,60 riskly 13. konoceka 78+104-78+260 platform 146,00 0,40 1,60 riskly 13. konoceka 78+104-78+		LOCAI	L RAILWAY LINES				
SUBOTICA		301 Subotica - Subotica Fabrika	a – RAILWAY LINE IS (OUT OF SERVICE			
SUBOTICA		302 Subot	ica - Subotica Bolnica				
SUBOTICA between the 1st and 2nd track 176+487-176+838 arranged surface 551,00 0.05 1.70		between the 1st and 2nd track	176+360-176+414	arranged surface	54,00	0,05	1,70
Detween the 2nd and 3rd track 176+332-176+838 arranged surface 236,00 0,05 1,70 arranged surface 238,00 0,05 1,70 arranged surface 238,00 0,05 1,70 arranged surface 238,00 0,05 1,70 arranged surface 238,00 0,05 1,70 arranged surface 238,00 0,05 1,70 arranged surface 238,00 0,05 1,70 arranged surface 238,00 0,05 1,70 arranged surface 238,00 0,05 1,70 arranged surface 238,00 0,40 3,00 arranged surface 308,00 arrang		between the 1st and 2nd track	176+414-176+487			0,25	1,60
Detween the 3rd and 4th track 176+335-176+573 arranged surface 238,00 0,05 1,70	SUBOTICA		176+487-176+838	arranged surface	351,00	0,05	1,70
NOVI SAD		between the 2nd and 3rd track	176+322-176+838				1,70
NOVI SAD		I .			238,00	0,05	1,70
NOVI SAD							
NOVI SAD			77+836-77+950	platform	114,00	0,40	3,00
NOVI SAD between the 10th and 1st track 77+835-77+887 platform 52,00 0,40 4,20 next to 1st track 77+835-78+250 platform 415,00 0,40 4,20-8 between the 2nd and 4th track 77+843-78+181 platform 338,00 0,40 8,75 masseby 12. n 1. konoceka 78+104-78+250 platform 146,00 0,40 8,90 masseby 14. n 13. konoceka 78+104-78+250 platform 145,00 0,40 6,46 Table 15			77+822-77+950	platform	128.00	0.40	3.72
NOVI SAD				•			·
next to 1st track	NOVI SAD			•			
Између 12. и 1. колосека 78+104-78+250 platform 146,00 0,40 8,90 између 14. и 13. колосека 78+104-78+249 platform 145,00 0,40 6,46 304 Podbara - Open line junction "3" - Open line junction "2" - (Kać) 305 (Rimski Šančevi) - Open line junction "1" - Open line junction "3" - (Podbara)				-			
Између 14. и 13. колосека 78+104-78+249 platform 145,00 0,40 6,46				1	·		
304 Podbara - Open line junction ,3" - Open line junction ,2" - (Kać) 305 (Rimski Šančevi) - Open line junction ,1" - Open line junction ,3" - (Podbara) 306 Rimski Šančevi- Bečej RIMSKI ŠANČEVI		75		•			
Sumski Šančevi					145,00	0,40	6,46
RIMSKI ŠANČEVI		304 Podbara - Open line jun	ction "3" - Open line jund	ction "2" - (Kac)			
RIMSKI ŠANČEVI	3			nction "S" - (Podba	га)		
Bački Jarak	DIWCKI ÇVNÇEMI	306 RI					
TEMERIN NONE							
NONE ZABALJ							
ŽABALJ NONE ČURUG NONE Bačko Gradište NONE Bečej predgrađe NONE BEČEJ NONE 308 (Brasina) - Open line junction Donja Borina – Zvornik Grad ZVORNIK GRAD 309 Pančevo Varoš - Pančevo Vojlovica PANČEVO VAROŠ next to 1 st track 18+131-18+223 station plateau 92,00 0,40 1,60 Pančevo Strelište between the 1st and 2nd track 18+105-18+345 platform 240,00 0,40 1,60 Pančevo Strelište next to railway line - left 1+290-1+400 platform 264,00 0,40 1,60 PANČEVO VOJLOVICA between the 3rd and 4th track 2+632-2+852 platform 220,00 0,40 1,60 next to 4th track 2+645-2+965 platform 220,00 0,40 1,60 310 Connecting track of Senta station: (Čoka) - separation switch No22 - separation switch No23 - (Orom)							
ČURUG NONE Bačko Gradište NONE Bečej predgrađe NONE BEČEJ NONE 308 (Brasina) - Open line junction Donja Borina – Zvornik Grad ZVORNIK GRAD NONE 309 Pančevo Varoš - Pančevo Vojlovica PANČEVO VAROŠ between the 1st and 2nd track 18+131-18+223 station plateau 92,00 0,40 1,60 between the 1st and 2nd track 18+105-18+345 platform 240,00 0,40 1,60 Pančevo Strelište next to railway line - left 1+290-1+400 platform 264,00 0,40 1,60 PANČEVO VOJLOVICA between the 3rd and 4th track 2+632-2+852 platform 220,00 0,40 1,60 next to 4th track 2+645-2+965 platform 220,00 0,40 1,60 310 Connecting track of Senta station: (Čoka) - separation switch No22 - separation switch No22 - separation switch No23 - (Orom)							
Bačko Gradište NONE							
Bečej predgrađe NONE							
NONE Substitution							
Substitution Subs							
Station plateau P2,00 0,40 1,60		308 (Brasina) - Open line					
Next to 1st track 18+131-18+223 station plateau 92,00 0,40 1,60	ZVORNIK GRAD	, , , , , , , , , , , , , , , , , , , ,					
Next to 1st track 18+131-18+223 station plateau 92,00 0,40 1,60		309 Pančevo					
between the 2nd and 3rd track 18+100-18+364 platform 264,00 0,40 1,60		1			92,00	0,40	1,60
Pančevo Strelište next to railway line - left 1+290-1+400 platform 110,00 0,40 1,60 PANČEVO VOJLOVICA between the 3rd and 4th track 2+632-2+852 platform 220,00 0,40 1,60 next to 4th track 2+645-2+965 platform 220,00 0,40 1,60 310 Connecting track of Senta station: (Čoka) - separation switch No22 - separation switch No23 - (Orom) 311 Markovac - Svilajnac - Despotovac - (Resavica)	PANČEVO VAROŠ	between the 1st and 2nd track	18+105-18+345	platform	240,00	0,40	1,60
PANČEVO VOJLOVICA between the 3rd and 4th track 2+632-2+852 platform 220,00 0,40 1,60 next to 4th track 2+645-2+965 platform 220,00 0,40 1,60 310 Connecting track of Senta station: (Čoka) - separation switch No22 - separation switch No23 - (Orom) 311 Markovac - Svilajnac - Despotovac - (Resavica)		between the 2nd and 3rd track	18+100-18+364	platform	264,00	0,40	1,60
PANCEVO VOJLOVICA next to 4th track 2+645-2+965 platform 220,00 0,40 1,60 310 Connecting track of Senta station: (Čoka) - separation switch No22 - separation switch No23 - (Orom) 311 Markovac - Svilajnac - Despotovac - (Resavica)	Pančevo Strelište	next to railway line - left		platform	110,00	0,40	1,60
next to 4th track 2+045-2+965 platform 220,00 0,40 1,60 310 Connecting track of Senta station: (Čoka) - separation switch No22 - separation switch No23 - (Orom) 311 Markovac - Svilajnac - Despotovac - (Resavica)	ΡΔΝČΕΝΟ ΜΟΙΙ ΟΜΙΟΛ						1,60
311 Markovac – Svilajnac – Despotovac – (Resavica)		I .					1,60
	310 Connecti				No23 - (O	rom)	
MARKOVAC between the 2nd and 3rd track 100+400-100+450 platform 50 0.4 1.6							•
	MARKOVAC	between the 2nd and 3rd track	100+400-100+450	platform	50	0.4	1.6



		km position of the	Platform/arranged	Dimensions					
Service point	Location	beginning and the end	surface	Length	Height	Width			
		of platform	Surface	(m)	(m)	(m)			
1	2	3	4	5	6	7			
	between the 3rd and 4th track	100+350-100+452	platform	102	0.4	1.6			
	between the 4th and 5th track	100+350-100+448	platform	92	0.4	1.6			
	312 M	etohija - Prizren**							
	313 V	ršac – Bela Crkva							
VRŠAC	between the 1st and 2nd track	82+807,5-82+902,5	platform	95,00	Height (m) 6 0.4	1,60			
VKSAC	between the 2nd and 3rd track	82+807,5-82+902,5	platform	95,00		1,60			
Potporanj		NONE							
Straža		NONE							
JASENOVO	NONE								
Crvena Crkva	NONE								
	between the 1st and 2nd					4.60			
BELA CRKVA	track	119+052-119+082	platform	30,00	0.30	1,60			
	SHI	UNTING LINES							
		sac - Vršac Vašarište							
ž v č	between the 1st and 2nd track	82+807,5-82+902,5	platform	95,00	0,40	1,60			
VRŠAC between the 1st and 2nd track 82+807,5-82+902,5 platform between the 2nd and 3rd track 82+807,5-87+902,5 platform 402 Kikinda – Metanolsko sirćetni kompleks (km 6+413)	platform	95,00		1,60					
	402 Kikinda – Metano	olsko sirćetni kompleks (k	m 6+413)			1			
KIKINDA	next to 1st track	160+030-160+166 platform		136,00	0,19	3,30-4,40			
KIKINDA	between the 1st and 2nd track	160+064-160+190	arranged surface	126,00	th Height (m) 6 0.4 0.4 0.4 0.4 0.4 0.4 0.4 0.4 0.4 0.4	1,50			
	403 Bogojevo – Dunavs	ka Obala – TRAFFIC SU			•				
		opovac - TRAFFIC SUSP							
	405 Sur	čin – Jakovo-Bečmen							
SURČIN		NONE	<u>, </u>						
	406 Šid- Sremska Rad	ča Nova - state border - (E							
	between the 1st and 2nd track	116+300-116+490	arranged surface	190,00	- /	2,50			
ŠID	between the 2nd and 3rd track	116+300-116+665	platform.	365,00	0,45	1,60			
	between the 3rd and 4th track	116+300-116+677	platform	377,00	00	1,60			
Adaševci		NONE							
MOROVIĆ	between the 1st and 2nd track	12+360-12+390	platform 30,00		0,35	1,60			
VIŠNJIĆEVO	between the 1st and 2nd track	19+633-19+655	platform	22,00	0,35	1,60			
Rasputnica Rača		NONE							
SREMSKA RAČA NOVA	between the 1st and 2nd track	24+169-24+205	platform	36,00	0,35	1,60			
		Skela - TRAFFIC SUSPI	ENDED						
		nta – Apatin Fabrika							
	409 Bačka Palanka – C	Sajdobra - TRAFFIC SUS	PENDED						

Note: In column one halts are marked with small letters and all other service points with capital letters.



^{*} not intended for handling of passengers

^{**} The lines on the territory of Kosovo and Metohija are temporarily under the supervision of UNMIK, according to the Temporary Agreement between ŽTP Belgrade and UNMIK railways, dated May 31, 2002 (records No 300/2002 - 153 dated May 31, 2002).

Appendix 9 Method for calculation of electricity consumption for train traction

Compensation for calculation of electricity consumption for train traction is determined as follows:

$$Csv/brtkm = \frac{MES.RAČ-TROŠ.INF}{BRTKMter + K*BRTKMput}$$

where:

Csv/brtkm – monthly rate of electric energy spent for train traction, expressed in RSD per grosstonne km.

MES.RAČ – monthly bill amount for high voltage electric energy issued by electric energy supplier.

TROŠ.INF – monthly expenses for electric energy for train traction need used by "Infrastruktura železnice Srbije"

BRTKMter – total (all railway undertakings) monthly freight transport expressed in gross-tonne km.

K – coefficient by means of which is taken into consideration that passenger trains consume more electric energy per gross-tonne km than freight trains.

BRTKMput – total (all railway undertakings) monthly passenger transport expressed in gross-tonne km.

The compensation amount per individual RU is calculated by multiplication of monthly rate of electrical energy for train traction with gross-tonne kilometers realized by the respective RU (BRTKMter for freight service, and K* BRTKMput for passenger service):

Ntern = Csv/btkm * BRTKMtern for freight service, i.e Nputn = Csv/btkm * K * BRTKMputn for passenger service,

where:

Ntern – compensation paid by x RU in freight service for the consumption of electrical traction, expressed in RSD.

BRTKMtern – gross-tonne kilometres realized by x RU in freight service in the given month.

Nputn - compensation paid by x RU in passenger service for the consumption of electrical traction, expressed in RSD.

BRTKMputn - gross-tonne kilometres realized by x RU in passenger service in the given month.

The compensation is paid to Infrastructure Manager on a monthly basis, based on the issued bill.

K coefficient values are as follows:

month	Ι	II	III	IV	V	VI	VII	VIII	IX	X	XI	XII
K	2	1,8	1,7	1,5	1,35	1,4	1,4	1,4	1,35	1,5	1,7	1,9



Appendix 10 Railway node boundaries

Node	Border station (service point) of the node	Chainage of the station (service point)	Entry signal from the direction	Railway line	Chainage of mandatory signal	Distance [m]
	Batajnica	19+031 ^P / 20+616 ^T	Nova Pazova	101 Belgrade Center - Stara Pazova - Šid - state border - (Tovarnik)	19+960 ^P / 21+396 ^T	929 ^P / 780 ^T
D	Ovča	12+555 / 12+653	Pančevo Main St.	107 Belgrade Denter - Pančevo Main St Vršac - state border - (Stamora Moravita)	13+550 / 13+647	995
BEOGRAD	Jajinci	10+988	Beli Potok (Mala Krsna)	103 (Belgrade Center) - Rakovica - Jajinci - Mala Krsna - Velika Plana	12+045	1057
	Resnik	14+059	Pinosava (Mladenovac)	102 Belgrade Center - Open line junction "G" - Rakovica - Mladenovac - Lapovo - Niš - Preševo - state border - (Tabanovce)	14+848	789
	Resnik	0+000	Bela Reka (Valjevo)	108 (Belgrade Center) - Resnik - Požega - Vrbnica - state border - (Bijelo Polje)	0+825	825
	Naumovićevo	167+180	Žednik (Vrbas)	105 (Belgrade Center) - Stara Pazova - Novi Sad - Subotica - state border - (Kelebia)	166+376	804
TICA	Palić	7+657	Bački Vinogradi (Horgoš)	201 Subotica - Horgoš - state border - (Roszke)	8+614	957
SUBOTICA	Subotica	76+685	Orom (Senta)	205 Banatsko Miloševo - Senta - Subotica	75+016	1669
ıs	Subotica Freight St.	75+861	Orom (Senta)	205 Banatsko Miloševo - Senta - Subotica	75+016	845
	Šebešić	123+761	Tavankut (Sombor)	110 Subotica - Bogojevo - state border - (Erdut)	122+915	846
	Sajlovo rasp. i odj.	3+595	Futog (Bogojevo)	207 Novi Sad - Odžaci - Bogojevo	3+890	295
LD (Sajlovo rasp. i odj.	81+635	Kisač (Vrbas)	105 (Belgrade Center) - Stara Pazova - Novi Sad - Subotica - state border - (Kelebia)	82+007	372
NOVI SAD	Sajlovo rasp. i odj.	3+595	Rimski Šančevi (Orlovat)	208 (Novi Sad) - Open line junction Sajlovo - Rimski Šančevi - Orlovat Stajalište	3+959	364
	Petrovaradin	70+870	Sremski Karlovci (Inđija)	105 (Belgrade Center) - Stara Pazova - Novi Sad - Subotica - state border - (Kelebia)	69+870	1000
70	Lapovo Varoš	106+302	Markovac (Velika Plana)	102 Belgrade Center - Open line junction "G" - Rakovica - Mladenovac - Lapovo - Niš - Preševo - state border - (Tabanovce)	105+710	592
LAPOVO	Lapovo	109+597	Bagrdan (Stalać)	102 Belgrade Center - Open line junction "G" - Rakovica - Mladenovac - Lapovo - Niš - Preševo - state border - (Tabanovce)	110+540	943
	Batočina	3+405	Badnjevac (Kragujevac)	109 Lapovo - Kraljevo - Lešak - Kosovo Polje - Đeneral Janković - state border - (Volkovo)	4+419	1014
	Trupale	234+939	Grejač (Stalać)	102 Belgrade Center - Open line junction "G" - Rakovica - Mladenovac - Lapovo - Niš - Preševo - state border - (Tabanovce)	233+934	1005
××	Crveni Krst	0+000	Matejevac (Zaječar)	219 (Niš) - Crveni krst - Zaječar - Prahovo Pristanište	(0+957=3+455) 3+736	1238
NIŠ	Međurovo	249+462	Doljevac	102 Belgrade Center - Open line junction "G" - Rakovica - Mladenovac - Lapovo - Niš - Preševo - state border - (Tabanovce)	250+323	861
	Ćele Kula	5+461	Niška Banja (Pirot)	106 Niš - Dimitrovgrad - state border - (Dragoman)	6+320	859
0,	Pančevo Main St.	16+069	Ovča (Beograd)	107 Belgrade Center - Pančevo Main St Vršac - state border - (Stamora Moravita)	14+878	1191
PANČEVO	Pančevo varoš	18+206	Banatsko Novo Selo (Vršac)	107 Belgrade Center - Pančevo Main St Vršac - state border - (Stamora Moravita)	19+242	1036
PA	Open line junction 2a	17+659	Jabuka (Zrenjanin)	202 Pančevo Main St Zrenjanin - Kikinda - state border - (Jimbolia)	18+160	501

P – passenger traffic (from the direction of Novi Sad) F- freight traffic (mixed, from the direction of Šid)

